

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PRIESTPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

3HTI

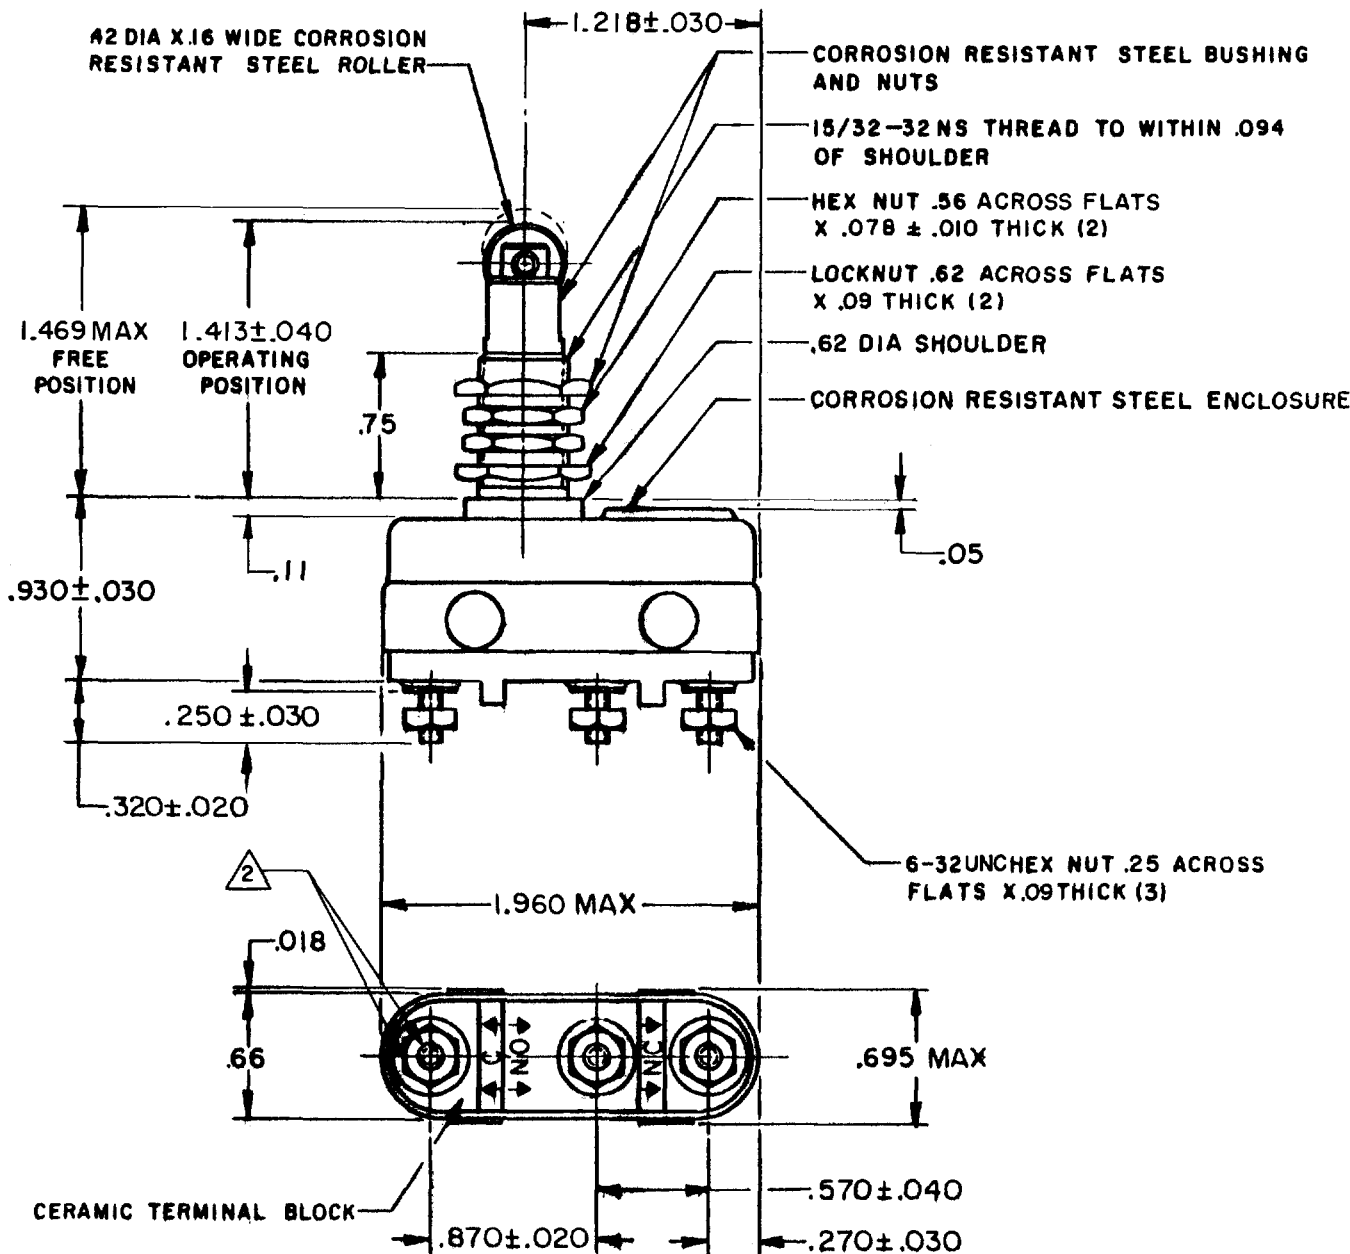

NOTE-

- 1-SWITCH WILL WITHSTAND TEMPERATURE OF 1000°F MAX
- 2 RECOMMENDED APPLIED TORQUE FOR A 6-32 UNC STAINLESS STEEL TERMINAL IS 10 IN LB MAX. EXCEEDING THIS TORQUE COULD DAMAGE THE SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - 30 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - 6 OZ MIN	L305 3A 1/10HP 125 VAC 2A 1/6HP 250 VAC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - .010 MAX		TOLERANCES ARE:
OVERTRAVEL - - - - .188 MIN		ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±
	RU ®	WEIGHT 2.7 OZ MAX

CATALOG LISTING
3HTI
 PAGE 1 OF 1
 M
 DRAWING NUMBER
 ISSUE 15
 RELEASE NO.
 REVISIONS
 A CO16180 5 SEP 61
 B CO16367 24 NOV 61
 C CO18487 26 SEPT 63
 D CO 21919 12 APR 67
 E CO29241 29 AUG 71
 F CO32050 17 MAY 73
 G CO-36610 11 FEB 76
 H CO 53398 21 JUN 83
 J CO 54474 3 MAY 84
 K CO-92890 7 MAY 98
 FORMTEK
 DRAWN
 R E R 5 SEP 61
 CHECK
 D A W 12 SEP 61
 CHECK
 T H 12 SEP 61
 CHECK
 V T H 12 SEP 61
 CHECK
 W 12 SEP 61
 CHECK
 X 12 SEP 61
 CHECK
 Y 12 SEP 61
 CHECK
 Z 12 SEP 61
 CHECK
 (M) 3HTI
 ISSUE 5
 REPLACES

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [01.098.1358.1](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#)
[6HM89](#) [6SE1](#) [6SX1-H58](#) [70500216](#) [70599106](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [EXD-AR20](#) [79211923](#) [79218589](#) [7AS12](#)
[MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#)
[914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#)
[11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [A7CN-1M-1-LEFT](#) [A831700C7.0](#) [121EN187-R](#)