

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

4HS109-318N

4HS109-318N

PAGE 1 OF 1

RELEASE NO. PR-16829 REPLACES

M

DRAWING NUMBER

ISSUE

3


REVISIONS

A	CO-80973	DLT	27 JUN 95
B	CO-94122	TSM	17 MAR 99

FO-52848-A
FORMTEK

DRAWN


TSK 20 OCT 88 CHECK DJS 21 OCT 88

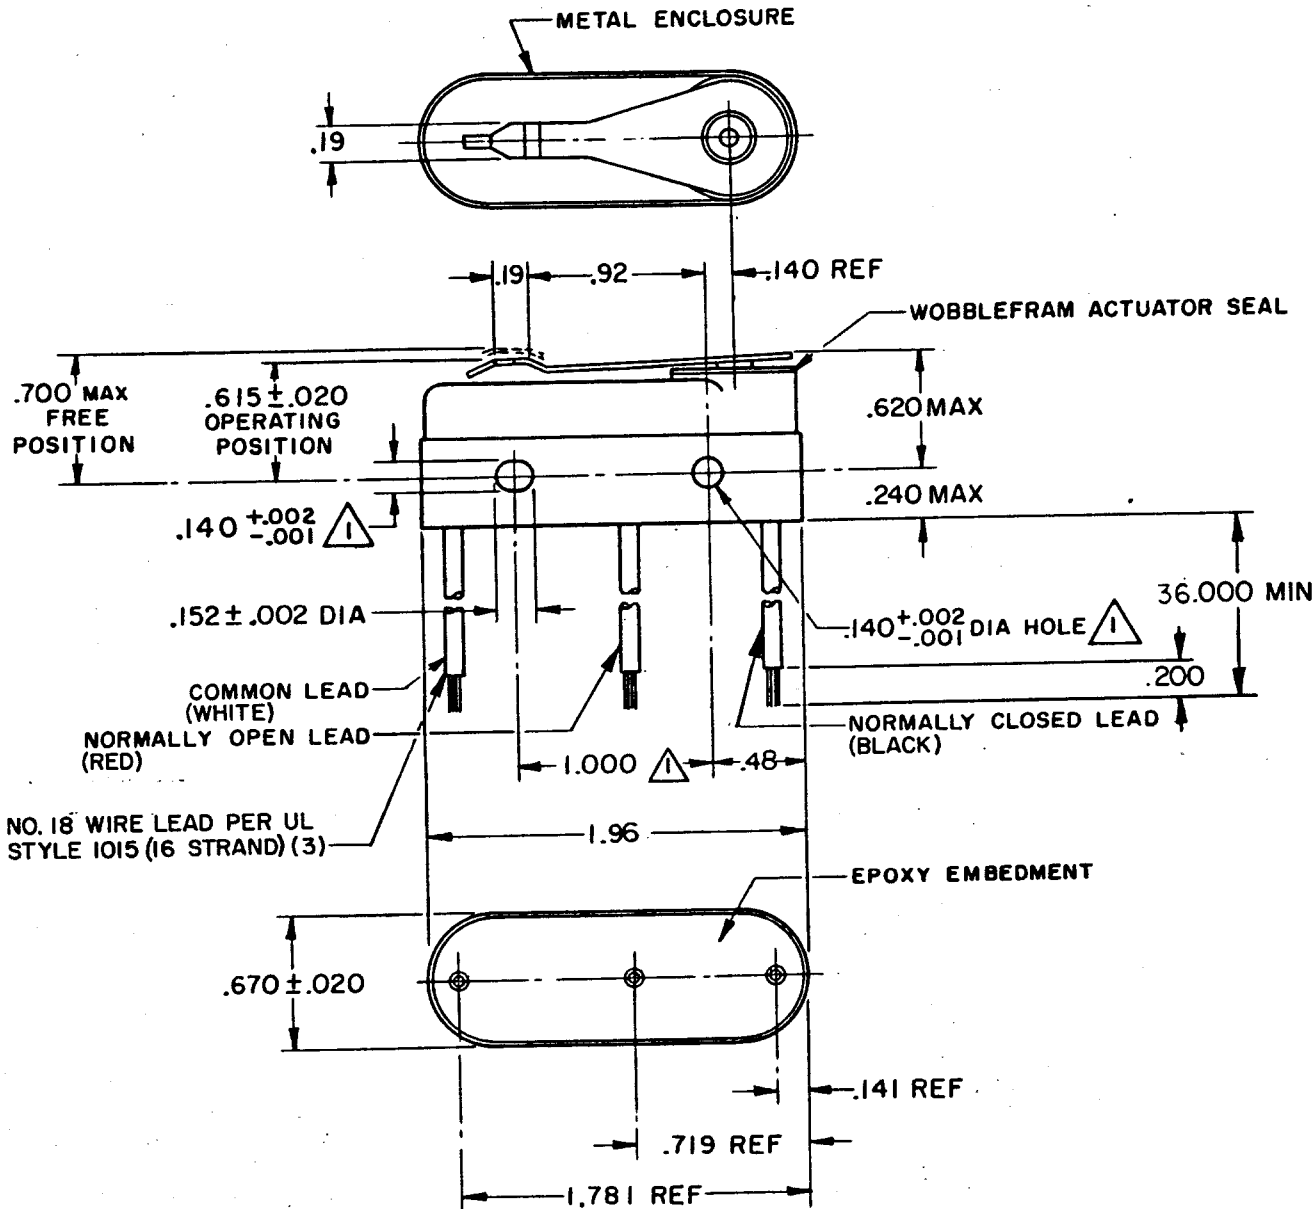

- NOTE -
- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ±.002 CENTERS.
 - 2 - LEADS APPROPRIATELY MARKED FOR CIRCUIT IDENTIFICATION.
 - 3 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM -65° TO +100° F
 - 4 - WEIGHT OF SWITCH ONLY IS 1.5 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 0.5 OZ MAX PER FOOT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE	10-22 OZ
RELEASE FORCE	4 OZ MIN
PRETRAVEL	.065 MAX
DIFFERENTIAL TRAVEL	.020 MAX
OVERTRAVEL	.010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT S P D T		
LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD
28 VDC 125 VAC	8 AMP 1 AMP	15 AMP .5 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	X, X
ONE PLACE	X, X	0.4/016	X, XX
TWO PLACES	X, XX	0.15/008	X, XXX
THREE PLACES	X, XXX		X, XXXX
ANGLES			

DESIGN UNITS SI METRIC US CUSTOMARY

L 277

1A - 125 VAC, 5A 28 VDC



WEIGHT 4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [01.098.1358.1](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#)
[6HM89](#) [6SE1](#) [6SX1-H58](#) [70500216](#) [70599106](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [EXD-AR20](#) [79211923](#) [79218589](#) [7AS12](#)
[MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#)
[914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#)
[11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [A7CN-1M-1-LEFT](#) [A831700C7.0](#) [121EN187-R](#)