



FORMTEK  
 FO-52848-A  
 DRAWN  
 G J W  
 15 JUL 82  
 CHECKED  
 S J A  
 22 JUL 82  
 CHECKED  
 S J A  
 22 JUL 82  
 REVISIONS  
 C C094274  
 DLM  
 MAR 99  
 B C057041A  
 CJH  
 MAR 85  
 A C051463  
 G J W  
 15 JUL 82  
 ISSUE  
 6  
 DRAWING NUMBER  
 M  
 5 SEI  
 PAGE 1 OF 1  
 RELEASE NO. SR-9672  
 REPLACES

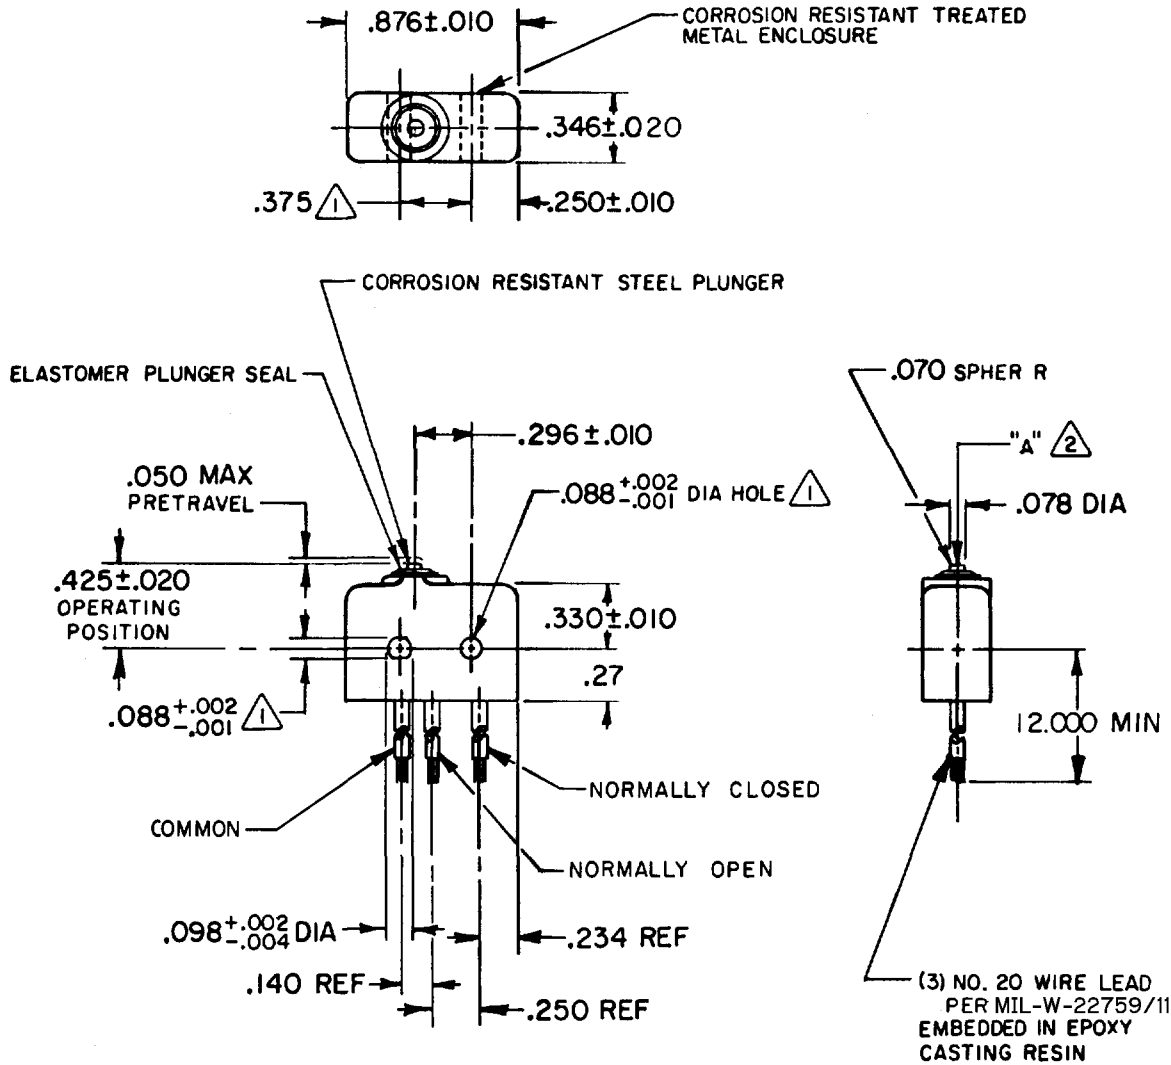

- NOTES**
- ① MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375±.002 CENTERS
  - ② ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
  - ③ WEIGHT OF SWITCH ONLY IS .26 OZ MAX  
 WEIGHT OF SWITCH WITH WIRE LEADS IS .65 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



**CHARACTERISTICS**

OPERATING FORCE	5-17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
 S P D T

250 VAC ----- 5 AMP  
 30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL -- 3 AMP  
 50,000 FT -- 2.5 AMP  
 RESISTIVE ----- SEA LEVEL -- 5 AMP  
 50,000 FT -- 5 AMP  
 MAXIMUM INRUSH ----- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

**TOLERANCES**  
 APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	17.04	X.X
ONE PLACE	X.X	0.4/0.018	X.XX
TWO PLACES	X.XX	0.16/0.008	X.XXX
THREE PLACES	X.XXX		0.8/0.03
ANGLES			0.36/0.015
			0.13/0.005

SI METRIC  US CUSTOMARY

DESIGN UNITS

WEIGHT ③

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [Honeywell](#) manufacturer:*

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [01.098.1358.1](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#)  
[6HM89](#) [6SE1](#) [6SX1-H58](#) [70500216](#) [70599106](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [EXD-AR20](#) [79211923](#) [79218589](#) [7AS12](#)  
[MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#)  
[914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#)  
[11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [A7CN-1M-1-LEFT](#) [A831700C7.0](#) [121EN187-R](#)