

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91 929



SWITCH - BASIC

CATALOG LISTING

V3-1075

CK-L7500

CATALOG LISTING  
V3-1075  
PAGE 1 OF 1  
RELEASE NO. PR-5913  
REPLACES  
CHECK  
ISSUE  
12

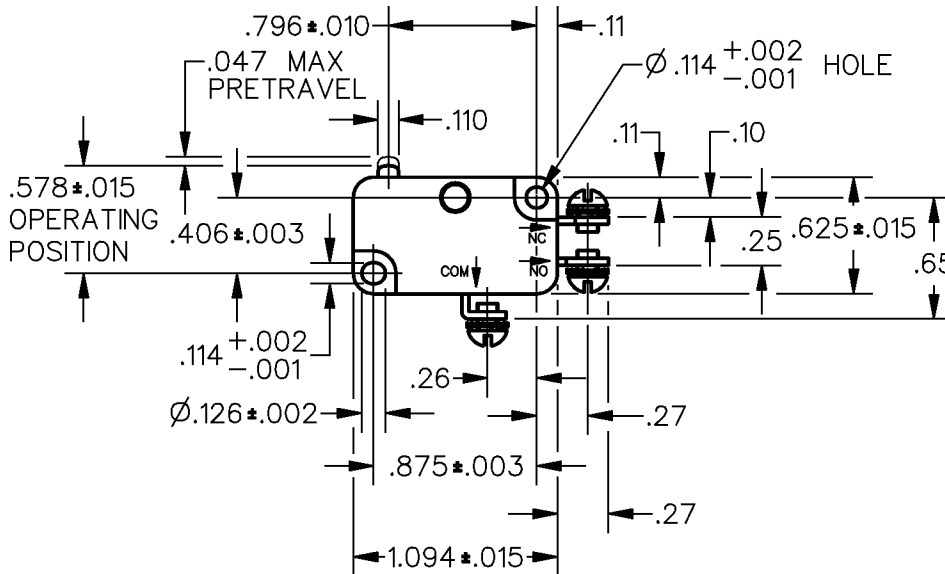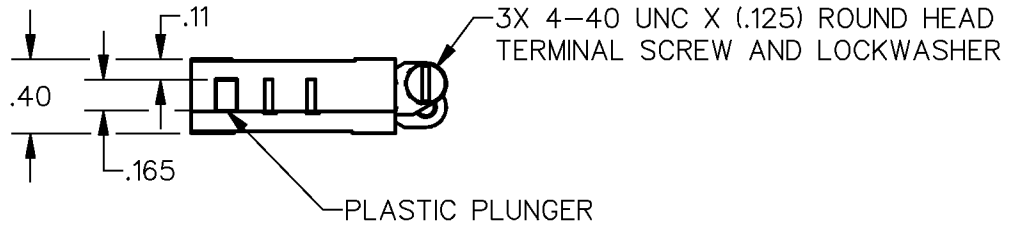

REVISIONS

A	OBS	CO77905
	DAW	18 JUL 94
B	RE-INS	CO82848
	DCS	18 JUL 96
C	CO-93311	
	TSM	21 OCT 98
D	0005782	
	R J	04 JUN 04


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 3 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 6-14 OZ MAX  
 RELEASE FORCE — — — — — 4 OZ MIN  
 DIFFERENTIAL TRAVEL — — — .006-.016  
 OVERTRAVEL — — — — — .040 MIN  
 FREE POSITION — — — — — .625 MAX  
 RELEASE TRAVEL — — — — — .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P D T

L22  
1A 125 VAC

SCALE FULL

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED TOLERANCES ARE**

ONE PLACE (.0)	± .030
TWO PLACE (.00)	± .015
THREE PLACE (.000)	± .005
ANGLES	±

WEIGHT



FORMTEK  
DRAWN  
DCS  
18 JUL 96  
CHECK  
AK  
04 JUN 04  
CHECK

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [Honeywell](#) manufacturer:*

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [01.098.1358.1](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#)  
[6HM89](#) [6SE1](#) [6SX1-H58](#) [70500216](#) [70599106](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [EXD-AR20](#) [79211923](#) [79218589](#) [7AS12](#)  
[MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#)  
[914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#)  
[11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [A7CN-1M-1-LEFT](#) [A831700C7.0](#) [121EN187-R](#)