

## SILICON RF SWITCHING DIODE

### Features


- Very low forward resistance
- Small capacitance

### Applications

- For band switching in TV/VTR tuners and mobile applications

#### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode




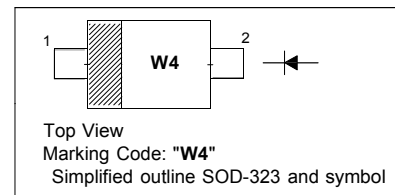


### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Diode Reverse Voltage	$V_R$	35	V
Forward Current	$I_F$	100	mA
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Operating Temperature Range	$T_{op}$	- 55 to + 125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Electrical Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Reverse Current at $V_R = 20\text{ V}$	$I_R$	-	-	20	nA
Forward Voltage at $I_F = 100\text{ mA}$	$V_F$	-	-	1	V
Diode Capacitance at $V_R = 1\text{ V}$ , $f = 1\text{ MHz}$ at $V_R = 3\text{ V}$ , $f = 1\text{ MHz}$	$C_T$	0.65 0.6	- -	1.4 1.1	pF
Reverse Parallel Resistance at $V_R = 0\text{ V}$ , $f = 100\text{ MHz}$	$R_P$	-	100	-	K $\Omega$
Forward Resistance at $I_F = 3\text{ mA}$ , $f = 100\text{ MHz}$ at $I_F = 10\text{ mA}$ , $f = 100\text{ MHz}$	$r_f$	- -	- -	0.7 0.5	$\Omega$
Series Inductance	$L_s$	-	1.8	-	nH

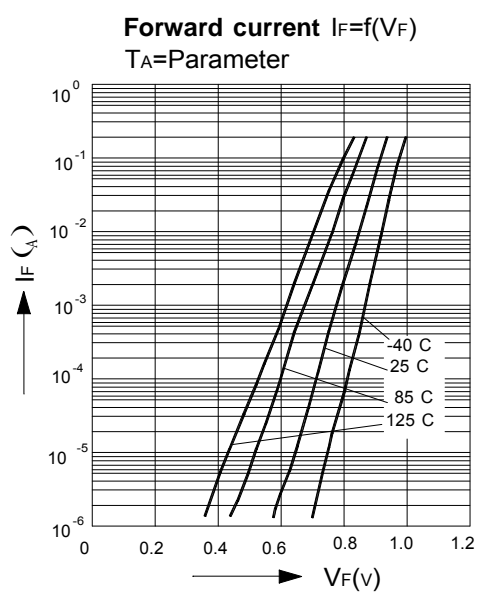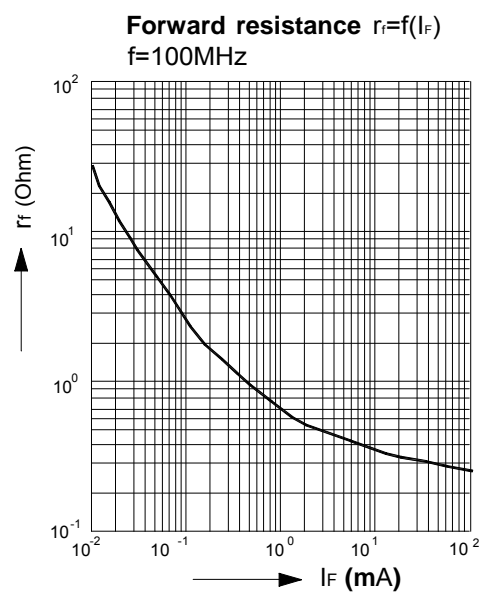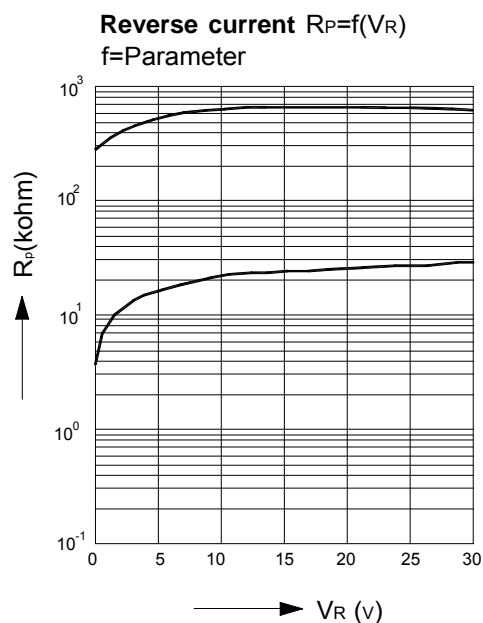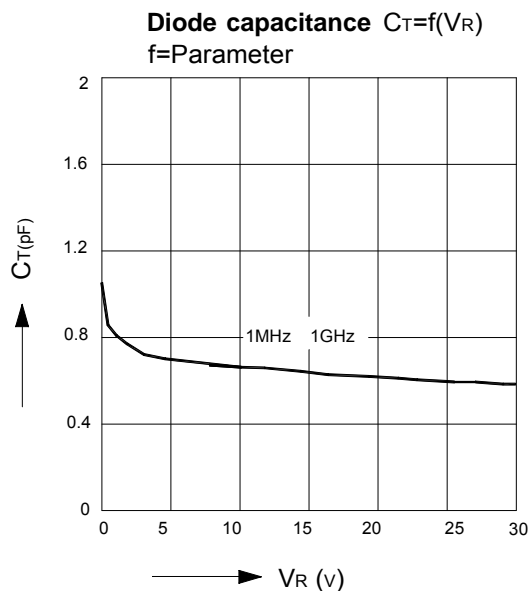

## **PACKAGE OUTLINE**

**Plastic surface mounted package; 2 leads**

**SOD-323**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Hong Kong Chuangji manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)  
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-](#)  
[7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#)  
[BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-](#)  
[13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#)  
[BAV99HDW-13](#) [MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#)