


# PNP General Purpose Transistor

for amplifier applications

On special request, these transistors can be manufactured in different pin configurations.





1.Base 2.Emitter 3.Collector  
SOT-23 Plastic Package







## Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	80	V
Collector Emitter Voltage	$-V_{CEO}$	80	V
Emitter Base Voltage	$-V_{EBO}$	4	V
Collector Current	$-I_C$	500	mA
Total Device Dissipation Derate above 25°C	$P_{tot}$	200 2.8	mW mW/°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	357	°C/W
Junction Temperature	$T_j$	-55 to +150	°C
Storage Temperature Range	$T_s$	-55 to +150	°C

### Characteristics at $T_{amb}=25\text{ }^{\circ}\text{C}$

	Symbol	Min.	Max.	Unit
DC Current Gain				
at $-I_C=10\text{mA}$ , $-V_{CE}=1\text{V}$	$h_{FE}$	100	-	-
at $-I_C=100\text{mA}$ , $-V_{CE}=1\text{V}$	$h_{FE}$	100	-	-
Collector Cutoff Current				
at $-V_{CB}=80\text{V}$	$-I_{CBO}$	-	0.1	$\mu\text{A}$
Collector Cutoff Current				
at $-V_{CE}=60\text{V}$	$-I_{CEO}$	-	0.1	$\mu\text{A}$
Collector Emitter Breakdown Voltage				
at $-I_C=1\text{mA}$	$-V_{(BR)CEO}$	80	-	V
Collector Base Breakdown Voltage				
at $-I_C=100\mu\text{A}$	$-V_{(BR)CBO}$	80	-	V
Emitter Base Breakdown Voltage				
at $-I_E=100\mu\text{A}$	$-V_{(BR)EBO}$	4	-	V
Collector Emitter Saturation Voltage				
at $-I_C=100\text{mA}$ , $-I_B=10\text{mA}$	$-V_{CE(sat)}$	-	0.25	V
Base Emitter On Voltage				
at $-I_C=100\text{mA}$ , $-V_{CE}=1\text{V}$	$-V_{BE(on)}$	-	1.2	V
Current Gain – Bandwidth Product				
at $-I_C=100\text{mA}$ , $-V_{CE}=1\text{V}$ , $f=100\text{MHz}$	$f_T$	50	-	MHz

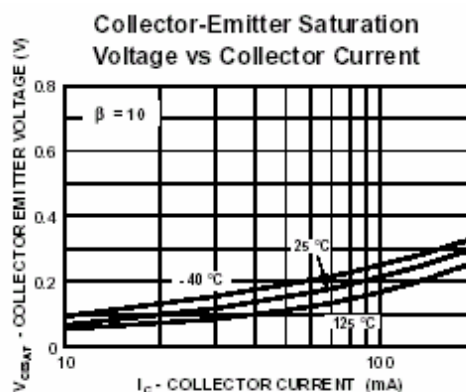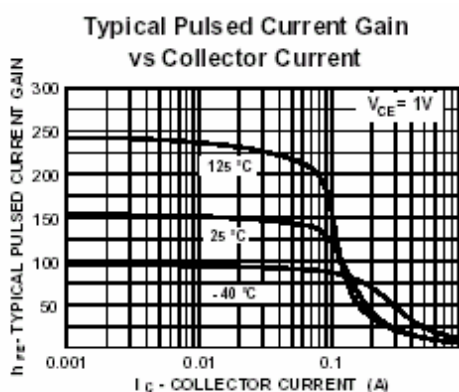

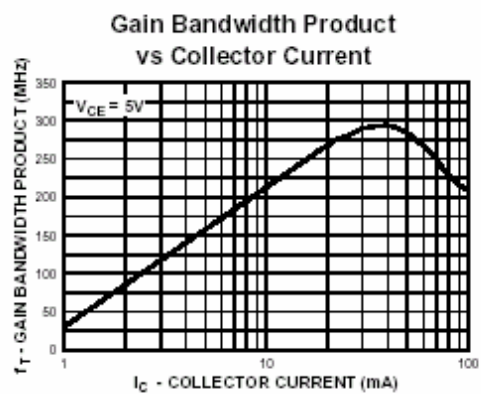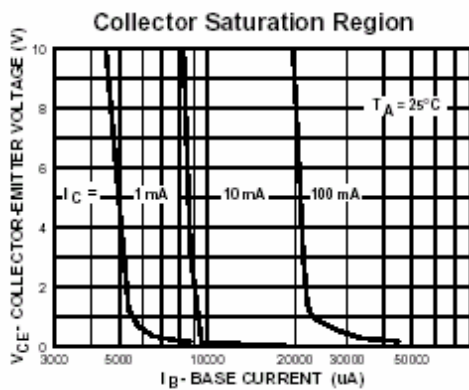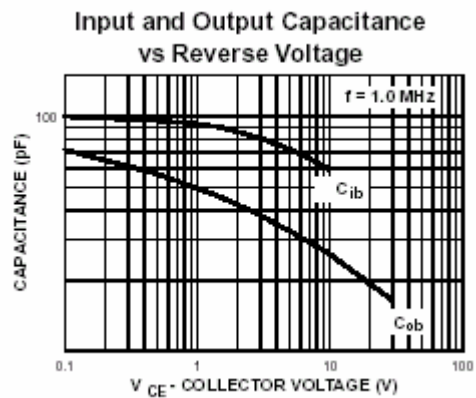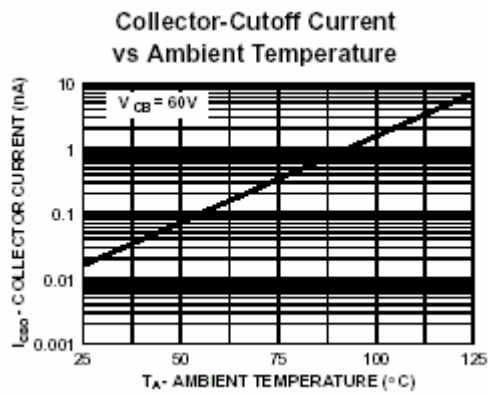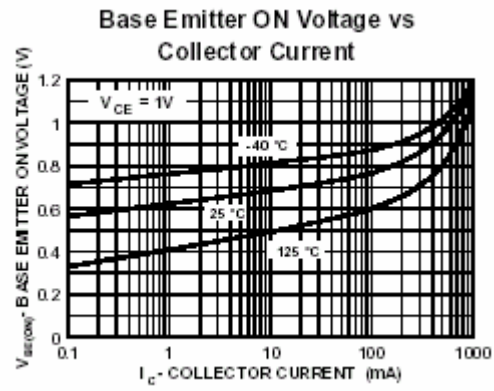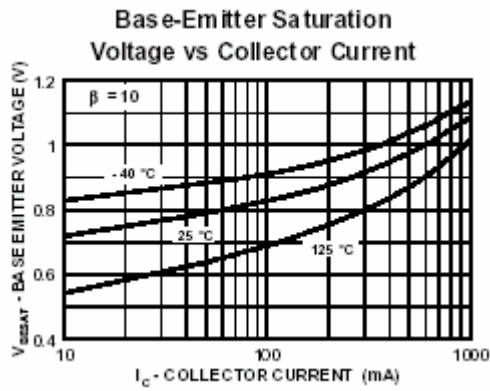

**PACKAGE OUTLINE**

**Plastic surface mounted package; 3 leads**

**SOT-23**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Hong Kong Chuangji manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)