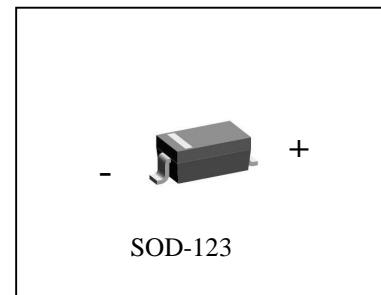


FAST SWITCHING DIODES
BAV19W/20W/21W
FEATURES

Fast switching speed

Surface mount package ideally suited for
automatic insertion

MARKING: BAV19W : A8 BAV20W: T2 BAV21W: T3

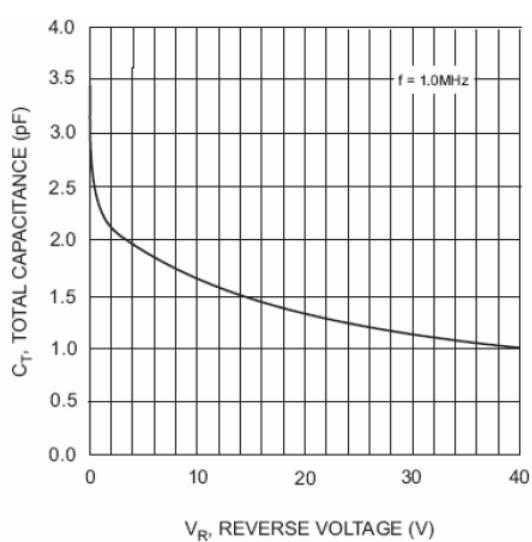
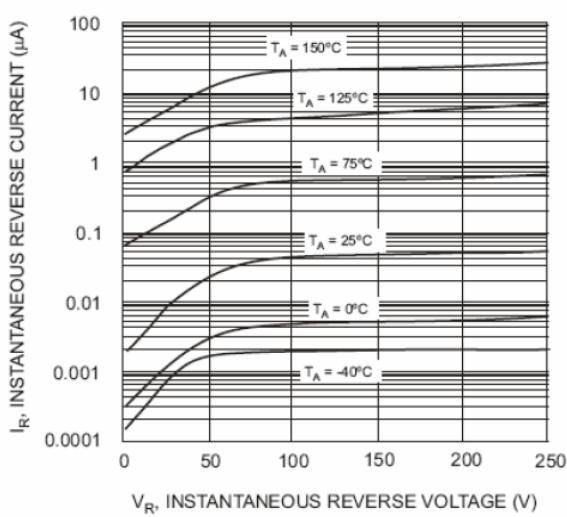
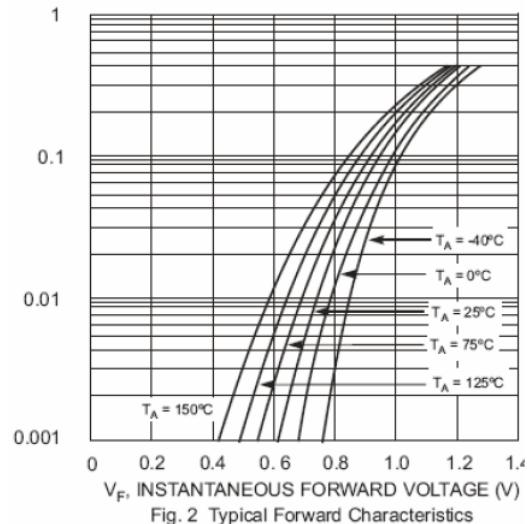
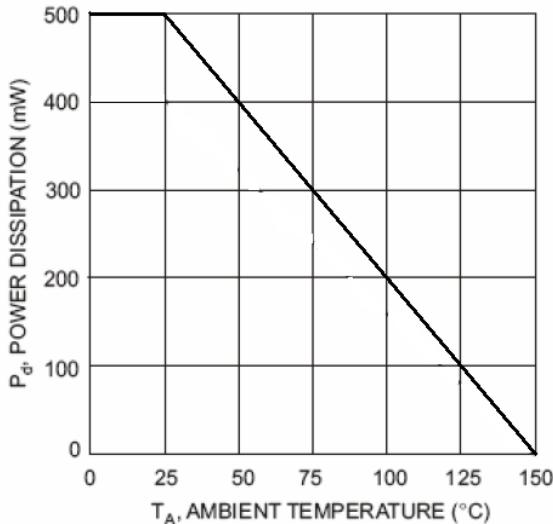


MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Parameter	Symbol	BAV19W	BAV20W	BAV21 W	Unit
Non-Repetitive Peak reverse voltage	V _{RM}	120	200	250	V
Peak Repetitive Peak reverse voltage	V _{RRM}	100	150	250	V
Working Peak Reverse Voltage	V _{RRM}				
DC Blocking	V _R				
RMS Reverse Voltage	V _{R(RMS)}	71	106	141	V
Forward Continuous Current	I _{FM}		400		mA
Average Rectified Output Current	I _O		200		mA
Peak forward surge current @=1.0ms	I _{FSM}		2.5		A
@=1.0s	I _{FSM}		0.5		A
Repetitive Peak Forward Current	I _{FRM}		625		mA
Power Dissipation	P _d		500		mW
Ambient Resistance Junction to Ambient	R _{JA}		250		°C/W
Storage temperature	T _{STG}		-65-125		°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V _{F1}			1.0	V	I _F =100mA
	V _{F2}			1.25	V	I _F =200mA
Reverse current BAV19W	I _R			0.1	μA	V _R =100V
BAV20W	I _R			0.1	μA	V _R =150V
BAV21W	I _R			0.1	μA	V _R =200V
Capacitance between terminals	C _T			5	pF	V _R =0,f=1MHz
Reverse Recovery Time	t _{rr}			50	ns	I _R =I _F =30mA I _{rr} =0.1*I _R ,R _L =100

BAV19W/20W/21W Typical Characteristics


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Hottech manufacturer:

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#)
[1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)