



Circuit Diagram

| NO.2 | |
|---------|--------|
| PART NO | vigor |
| 1 | 90±30 |
| 2 | 130±30 |
| 3 | 180±30 |
| 4 | 250±30 |
| 5 | 350±50 |

| NO.3 | |
|---------|--------------|
| PART NO | MATERIAL/QTY |
| S | SUS/1PC |
| C | C5210/1PC |
| D | SUS/2PCS |
| F | C5210/2PCS |

| NO.1 | | |
|---------|------|--|
| PART NO | H | |
| A | 4.3 | |
| B | 4.5 | |
| C | 5 | |
| D | 5.5 | |
| E | 6 | |
| F | 6.5 | |
| G | 7 | |
| H | 7.5 | |
| I | 8 | |
| J | 8.5 | |
| K | 9 | |
| L | 9.5 | |
| M | 10 | |
| N | 10.5 | |

| NO.4 | | |
|---------|-----|----|
| PART NO | L | L1 |
| A | 8 | 10 |
| B | 8.5 | 11 |
| C | 9 | 11 |
| D | 9.5 | 12 |
| E | 10 | 12 |

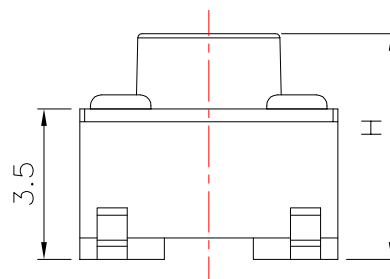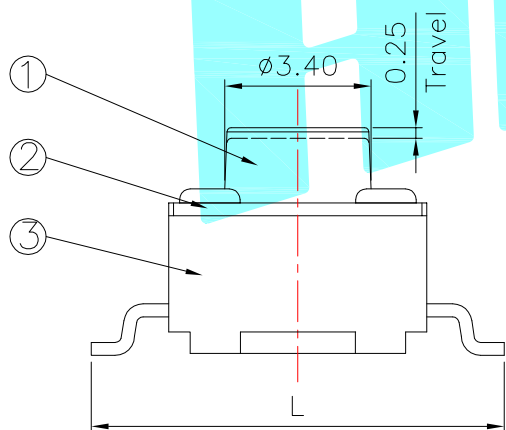

PCB Layout(Pattern side)

| NO.5-NO.6 | |
|-----------|---------------|
| PART NO | NOTE |
| 01~99 | SERIAL NUMBER |

| ⑤ | Terminal | — | 4 | Brass(0.30t) | Plating silver | — |
|------|-----------|---------|------|--------------|----------------|--------|
| ④ | Contact | — | 1 | F.Ag/SUS | — | — |
| ③ | Base | — | 1 | Nylon | Black | — |
| ② | Cover | — | 1 | SPCC | Plating Nickel | — |
| ① | Keystoke | — | 1 | Nylon | Black | — |
| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |

| APPROVALS | | DATE | HRO 株式会社 ELECTRONICS CO.,LTD | | | |
|----------------|-------|---|---------------------------------|-------------------|-------------|--------------|
| DRAWN | SUNNY | 2020.7.7 | TITLE: | TACT SWITCHES | | |
| CHECKED | | | PART NO. | K2-1102SP-□□□□-□□ | | |
| APPROVALS | | | UNIT: mm | SCALE: 1:1 | PROJ: | |
| TOLERANCES ARE | | 30~以上: ±0.30 10~30: ±0.20 5~10: ±0.15 ~ 5: ±0.10 | ANGLE | ±2' | DRAWING NO. | SHEET 1 OF 1 |

| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|------|-------|--------------|---------|--------|--------|
| | A | | NEW | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [HRO parts](#) manufacturer:

Other Similar products are found below :

[5GTH92001](#) [5GTH9202242](#) [6407-250V-25273P](#) [ADTSA62NV](#) [ADTSA62RV](#) [B3F-3123](#) [1977177-8](#) [1977266-1](#) [ADTSA63NV](#)
[ADTSM21NSVTR](#) [ADTSM25RVTR](#) [ADTSM32NVTR](#) [ADTSMW64RV](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [KSC241J SP DELTA LFS](#)
[3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#) [5GTH9658222](#) [6407-250V-25343P](#) [ADTSM31NVTR](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#)
[KMT011MNGJLHS](#) [B3WN6002S](#) [70-201.0](#) [ADTSG648NV](#) [ADTSM62KSVTR](#) [ADTSM648NV](#) [95C06E3RAT](#) [5GTH96561](#) [3ATH9Q](#)
[FSMRA8JHA04](#) [HARS0073](#) [Y33R411N9FPLFT](#) [Y31C01402FPLFS](#) [PTS645SK50SMTR92](#) [ADTSM32NVB](#) [KMS233GPWTLFG](#)
[Y78B64124FP](#) [Y96D113G0FP LFS](#) [Y33A812C5FP LFT](#) [Y56B2D120FP LFS](#) [PTS645 DVM83-BN125-2 LFS](#) [B3W 1000G](#) [KSC621G OL](#)
[LFS](#) [B3F 1002C](#) [B3F 0047H](#) [B3F 1000G](#)