



ROHS

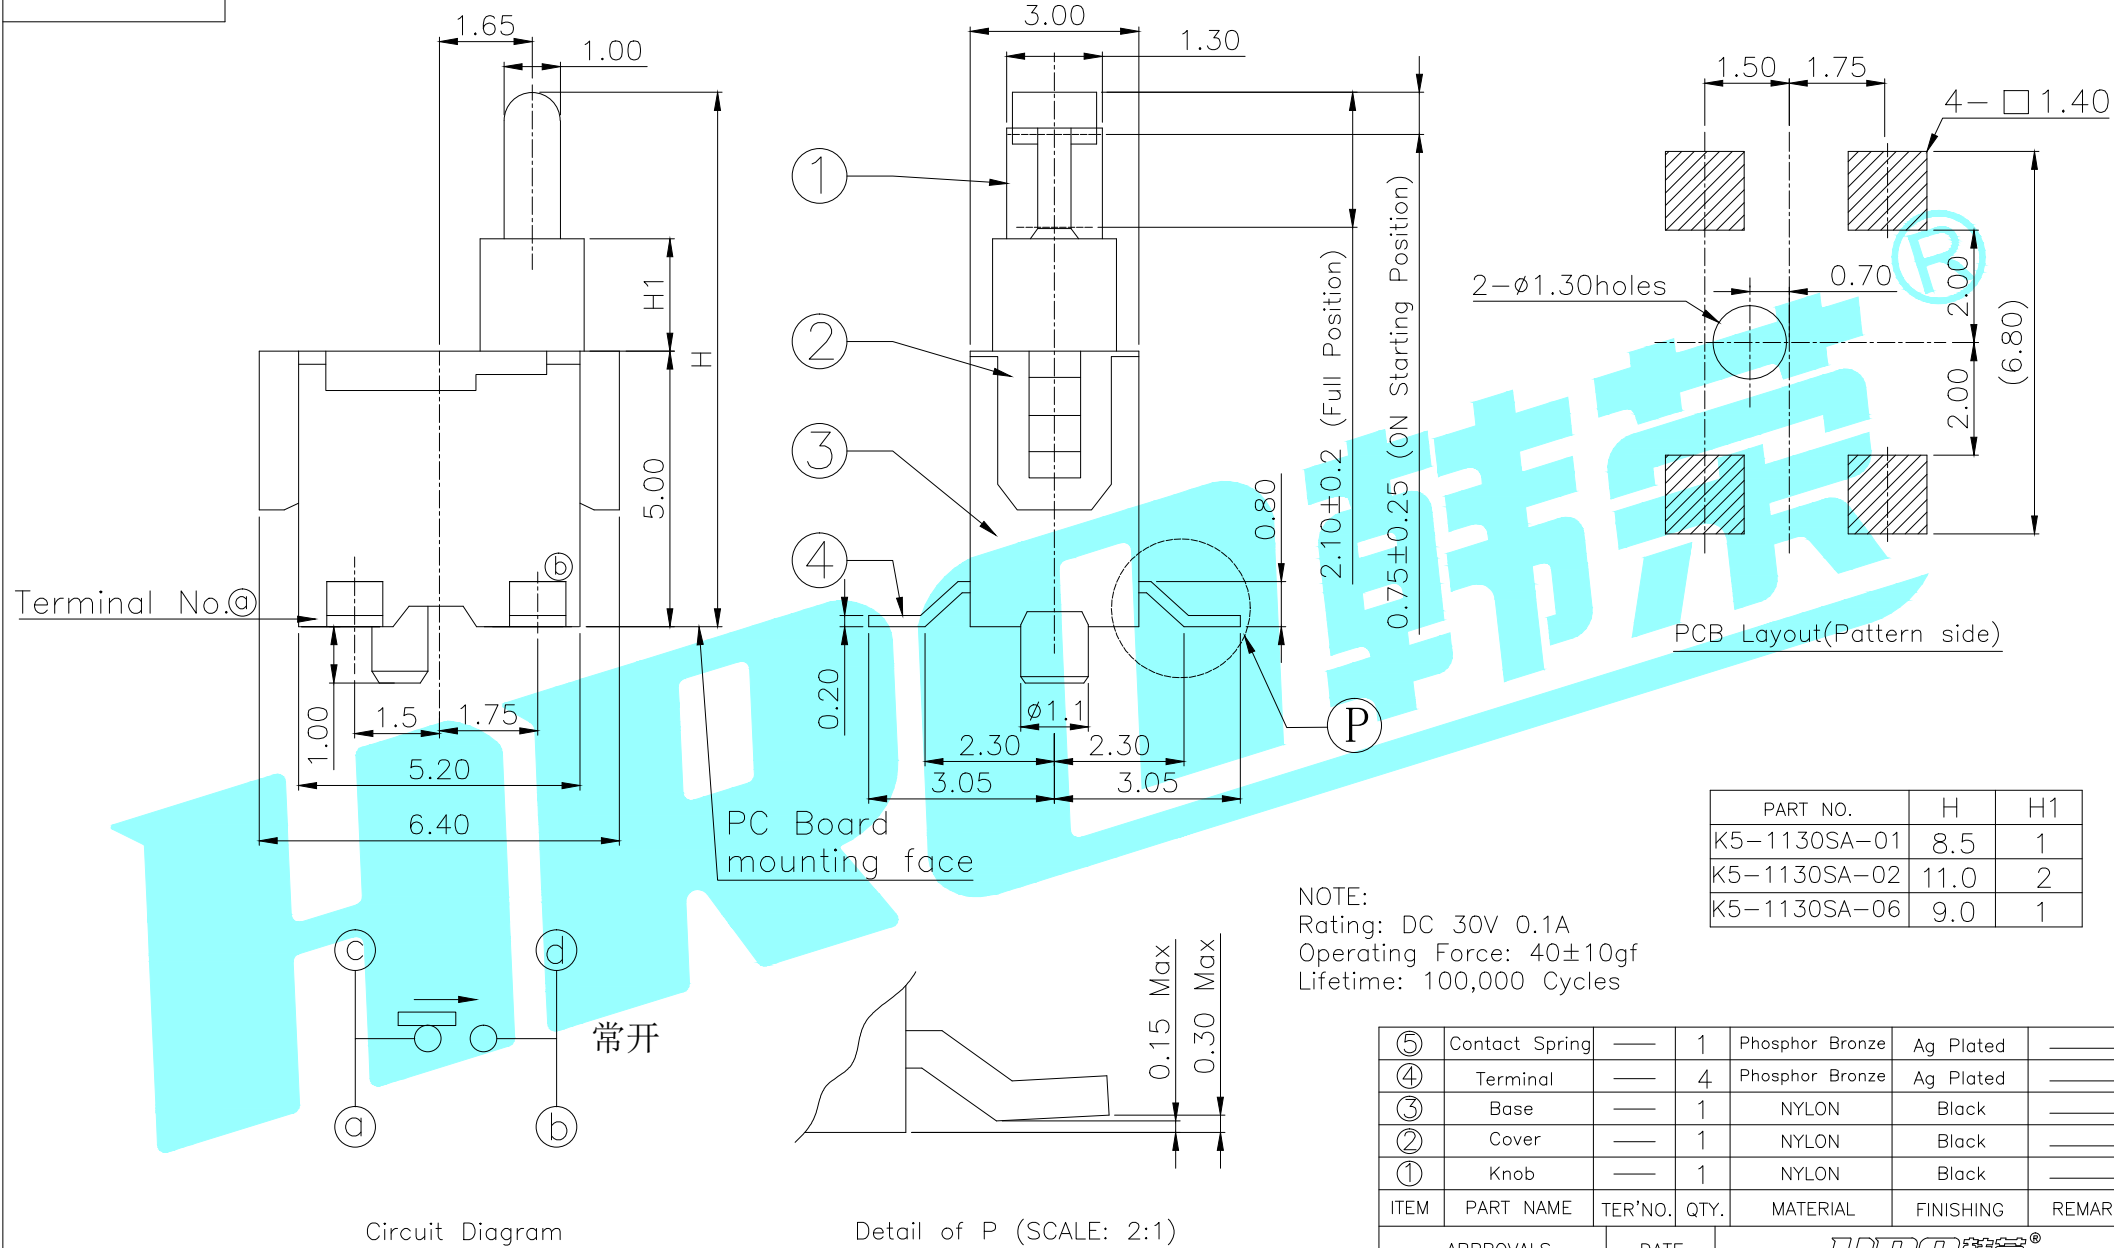


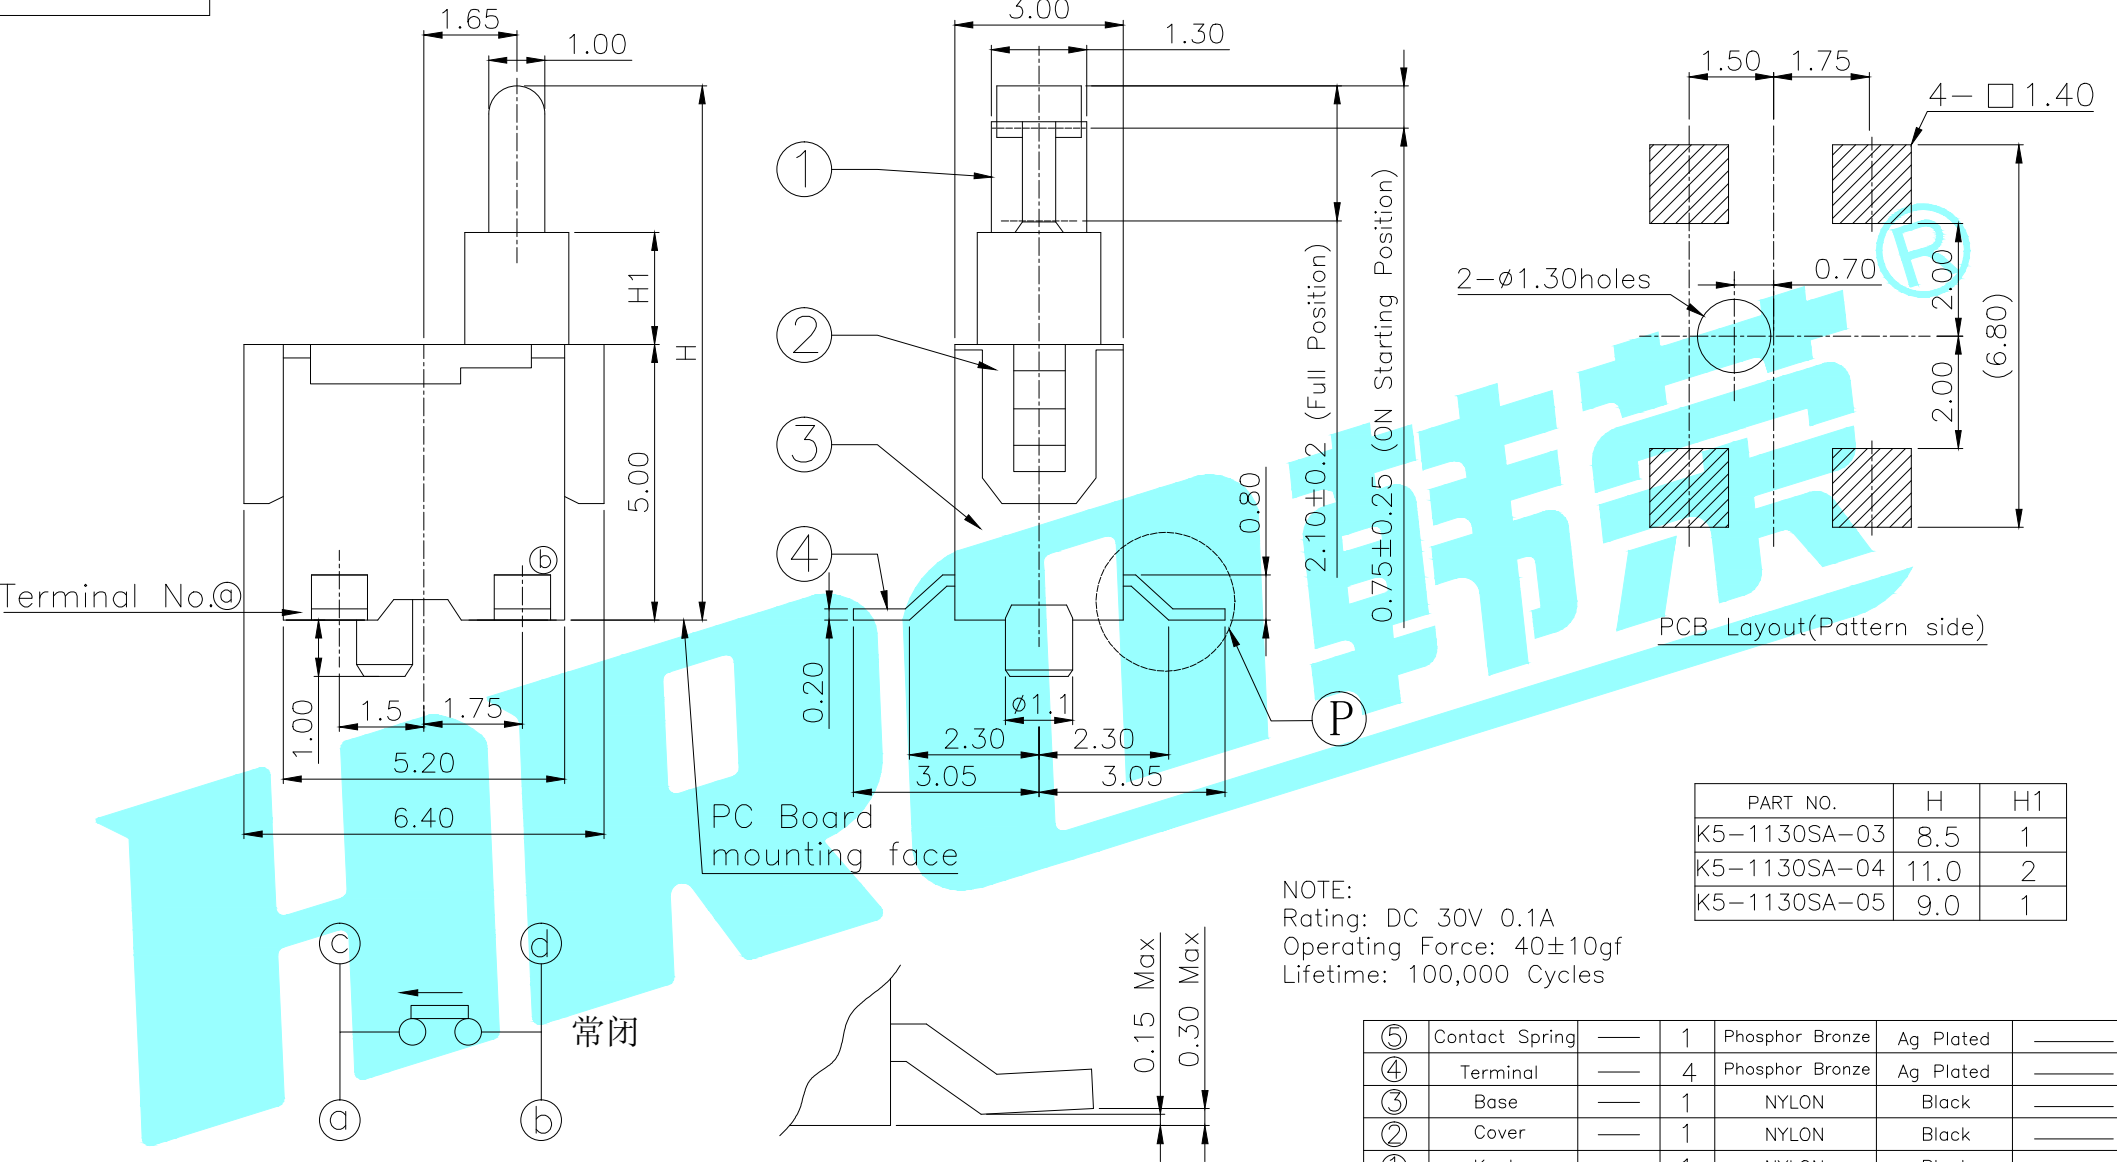
PART NO.	H	H1
K5-1130SA-01	8.5	1
K5-1130SA-02	11.0	2
K5-1130SA-06	9.0	1

NOTE:
Rating: DC 30V 0.1A
Operating Force: 40±10gf
Lifetime: 100,000 Cycles

⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		<div>HRO韓京[®]</div> <div>ELECTRONICS CO.,LTD</div>		
DRAWN	JKUN.LU	2018.08.01					
CHECKED				TITLE:	DETECTOR SWITCHS		
APPROVALS				PART NO.	K5-1130SA-□□		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2'	DRAWING NO.	_____	SHEET 1 OF _____	

							CHECKED			TITLE:	DETECTOR SWITCHS			
							APPROVALS			PART NO.	K5-1130SA-□□			
_____	A	_____	NEW			_____	TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.		10~30	±0.20		±2°	DRAWING NO.	_____	SHEET 1 OF 1
								5~10	±0.15					
								~ 5	+0.10					



Terminal No.⑥

PC Board
mounting face

PCB Layout(Pattern side)

PART NO.	H	H1
K5-1130SA-03	8.5	1
K5-1130SA-04	11.0	2
K5-1130SA-05	9.0	1

NOTE:
Rating: DC 30V 0.1A
Operating Force: 40±10gf
Lifetime: 100,000 Cycles

Circuit Diagram

Detail of P (SCALE: 2:1)

⑤	Contact Spring	——	1	Phosphor Bronze	Ag Plated	——		
④	Terminal	——	4	Phosphor Bronze	Ag Plated	——		
③	Base	——	1	NYLON	Black	——		
②	Cover	——	1	NYLON	Black	——		
①	Knob	——	1	NYLON	Black	——		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE	<div>HRD韓銳®</div> <div>ELECTRONICS CO.,LTD</div>				
DRAWN		LIUCAN	2020.12.17					
CHECKED			TITLE:				DETECTOR SWITCHES	
APPROVALS			PART NO.				K5-1130SA-□□	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1		
		10~30	±0.20					
		5~10	±0.15					
		~ 5	±0.10					
		±2'		DRAWING NO.	——	SHEET 1 OF 1		

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Directional Switches](#) category:

Click to view products by [HRO parts](#) manufacturer:

Other Similar products are found below :

[MJTP1109AL](#) [RA3CSH6A](#) [APTCFVTR](#) [T5-NH1118](#) [RKJXW1014002](#) [RKJXW2014001](#) [T4-0183](#) [T4-TCN3332](#) [T4-TCK3312](#) [TSWA-3N-CUP2-LFS](#) [TSW A-3N-CUP-LFS](#) [3J2015-200](#) [T2-0018](#) [T5-CK2212](#) [3J2015-200N](#) [CS41001E](#) [T4-0010](#) [2200-000301](#) [T4-CN211N](#)
[RKJXK1210002](#) [RKJXK122000D](#) [RKJXK122400Y](#) [RKJXL100401V](#) [RKJXM1015004](#) [RKJXS1004001](#) [RKJXT1F42001](#) [RKJXV1220001](#)
[RKJXV1224005](#) [RKJXY1000006](#) [RKJXY100000A](#) [SKQUDBE010](#) [SKRHAAE010](#) [SKRHABE010](#) [SKRHACE010](#) [SKRHADE010](#)
[SLLB120100](#) [SLLB120200](#) [SLLB120300](#) [SLLB510100](#) [SLLB510200](#) [SLLB520100](#) [SRBE110301](#) [SRBE210200](#) [AMPTFP2VTR](#) [D16202](#)
[PHAP4383V](#) [3302](#) [QS1 KQS1 BK S C](#) [QS2 KQS1 BK N C](#) [QS2 KQS1 BK S C](#)