

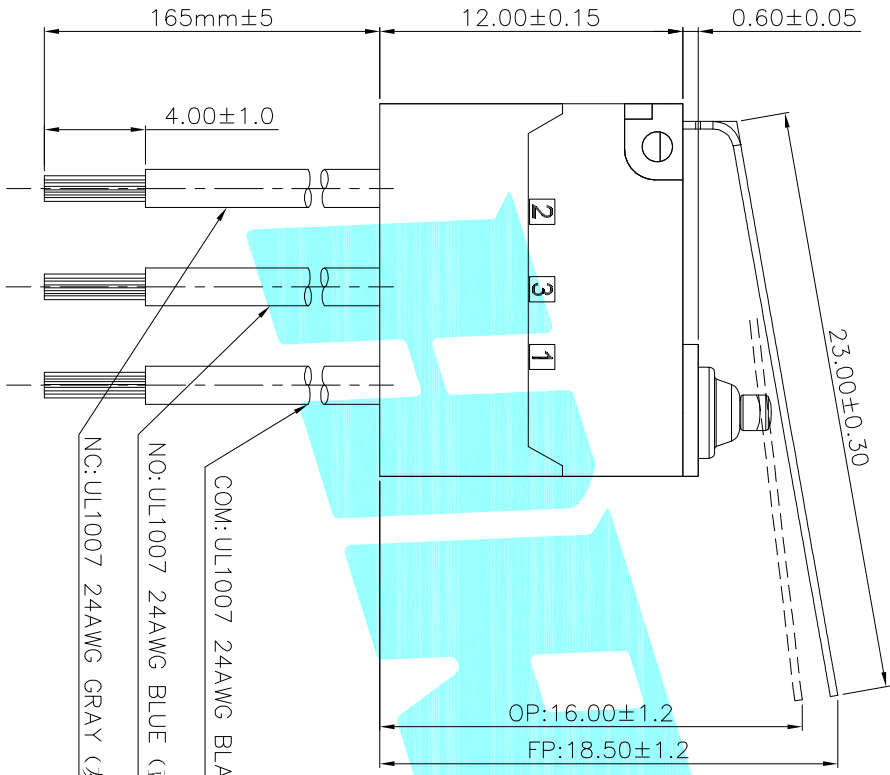


INGRESS PROTECTION:IP67



COM:UL1007 24AWG BLACK (黑色)  
 NO:UL1007 24AWG BLUE (蓝色)  
 NC:UL1007 24AWG GRAY (灰色)

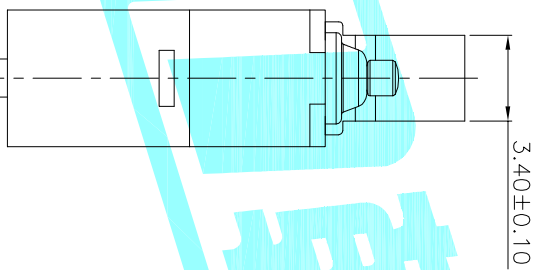

Circuit Diagram

- NOTE:
- 1.Rating1:DC12V 3A  
Rating2:48V DC/125V AC/250V AC 0.1A
  - 2.Operating froce:130gf MAX
  - 3.Electric Life:10,000
  - 4.Mechanical Life:1,000,000

⑦	Shrapnel	—	1	Brass	Plating silver	—
⑥	Contact	—	1	Ag	—	—
⑤	Sealed Circle	—	1	Silicone Rubber	—	—
④	Terminal	—	3	Bross(0.50t)	Plating silver	—
③	Plunger	—	1	POM	Black	—
②	Cose	—	1	PA	Black	—
①	Cover	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	TITLE
DRAWN J.X.Zhang	2018/8/1	MICRO SWITCHS
CHECKED		
APPROVALS		

APPROVALS	PART NO.	SCALE:
	K9-1803A-4	1:1

TOLERANCES ARE	30~R/L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROD.
	10~30	±0.20				
	5~10	±0.15	±2'	DRAWING NO.		
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD

MICRO SWITCHS

PART NO. K9-1803A-4

SCALE: 1:1

DRAWING NO.

SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [HRO parts manufacturer](#):*

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#) [6SE1](#) [6SX1-H58](#) [71051](#) [714-0293](#) [MBH2731](#) [79211923](#) [79218589](#) [MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#) [914CE1-6G](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#) [121EN188-R](#) [1245.0120](#) [125EN56-RB](#) [D433V3RD](#) [1267.0101](#) [1267.7101](#) [D4BFC1](#) [12SM4-T2](#) [12SX2-T2](#) [1298.0101](#)