

acar XP standard

Surge protective power strip




- 5 SOCKET OUTLETS WITH EARTHING PIN**
- TWO FUSES**
- SOCKET OUTLETS SAFE FOR CHILDREN**
- SURGE PROTECTION**
- ILLUMINATED DOUBLE POLE MAINS SWITCH**
- AVAILABLE POWER CORD LENGTHS: 1.5m, 3m, 5m**

Unique, modern design, high quality and infrequent in competitive products features, distinguish the family of products **acar XP Protector**. The devices were designed for the most demanding users thus the production process does not allow even the smallest compromise. The **acar XP standard** is a basic model, with all the best features of the **acar XP** series – mains switch integrated with housing, fast blow fuses mounted in a retractable module, small size and compact and rigid construction. The device has 5 socket outlets with earthing pin and the Power On indicator. It is characterized by high durability and high utility value.

Technical data: acar XP standard

| | |
|--|--|
| Maximum load | P _{MAX} 2300W |
| Nominal voltage U _N | 230V |
| Nominal frequency | 50Hz |
| Nominal load current | ΣI _N = 10A MAX |
| Surge protection response time | <25ns |
| Maximum voltage U _C | 250V 50Hz |
| Protection level U _p | ≤1.3kV |
| Nominal discharge current i _N | 2kA (L/N) – 8/20μs |
| Maximum discharge current i _{MAX} | 6.5kA (L/N) – 8/20μs |
| Fuses | two fuses 10A/250V |
| Anti-shock protection system | earthing pins connected to the protective earthing conductor |
| Number of socket outlets | 5 two-pole socket outlets with earthing pin, 10A/250V |
| Switch | illuminated double pole mains switch |
| Housing | made of self-extinguishing plastic |
| Dimensions | 365x65x52mm |
| Weight | 0.5kg |

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.

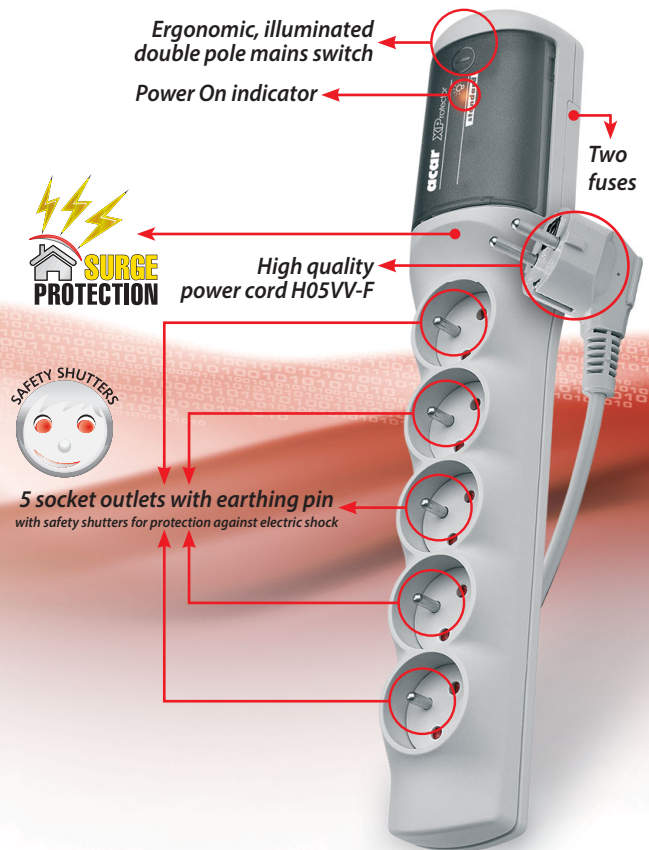

2 FUSES



5 SOCKET OUTLETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS



DOUBLE POLE, INTEGRATED MAINS SWITCH WITH POWER ON INDICATOR

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HSK Data](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-](#)
[4226B](#) [70-4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[821-22-002-10-001101](#)