


## Coaxial Cable Connector 11\_SMA-50-2-6/111\_N

### Description

Straight cable plug

Interface standards

IEC 60169-15\_MIL-STD-348A/310\_CECC 22110

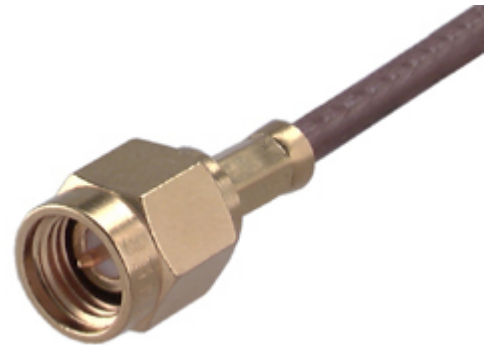

### Technical Data

#### Electrical Data

|                          |        |
|--------------------------|--------|
| Impedance                | 50 Ω   |
| Interface frequency max. | 18 GHz |

#### Mechanical Data

|                |           |
|----------------|-----------|
| Centre contact | soldered  |
| Outer contact  | crimped   |
| Weight         | 0.0034 kg |

#### Environmental Data

|  |                  |
|--|------------------|
| Operating temperature                                | -65 °C to 165 °C |
| 2011/65/EU (RoHS - including 2015/863 and 2017/2102) | compliant        |

#### Material Data

| Piece Parts    | Material               | Surface Plating                            |
|----------------|------------------------|--|
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated)          |
| Outer contact  | Copper Beryllium Alloy | Gold Plating (Nickel underplated)          |
| Body           | Copper Beryllium Alloy | Gold Plating (Nickel underplated)          |
| Insulator      | PFA / PTFE             |  |
| Coupling nut   | Bronze                 | Gold Plating (Nickel underplated)          |
| Gasket         | VMQ (Silicone rubber)  |  |
| Crimp ferrule  | Copper                 | Gold Plating (without Nickel underplating) |

### Related Documents

|                      |                |
|----------------------|----------------|
| Catalogue drawing    | DOU-00006102   |
| Assembly instruction | DOC-0000179309 |

### Ordering Information

|                      |                      |
|----------------------|----------------------|
| Single package       | 11_SMA-50-2-6/111_NE |
| Bulk 100 pcs package | 11_SMA-50-2-6/111_NH |

### Additional Information

|                 |  |
|-----------------|--|
| Suitable cables | K_02252_D, ENVIROFLEX_316_D, G_02232_D |
|-----------------|--|

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) category:*

*Click to view products by [Huber & Suhner](#) manufacturer:*

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)