

Features

- 32-Ch. DI/O slave module with NPN/PNP type
- Max. 100Mbps transfer rate
- Easy installation with RJ45 phone jack and LED diagnostic
- Pluggable terminal block with spring plug connectors
- DIP switch for address setting
- DIN rail mounting (L-122 x W-65 x H-104 mm)


Specifications

Serial interface	Fast Ethernet, Full-Duplex
Distributed Clock	1ms
Cable type	CAT5 UTP / STP Ethernet cable
Surge protection	10KV
Transmission speed	100Mbps
I/O isolation voltage	3750Vrms
Input types	NPN / PNP type
Input impedance	5.6KΩ / 0.5W
Input current	±5mA(Max)
Output type	NPN: open collector Darlington; PNP: MOSFET-P; Integral suppression on diodes for inductive loads
Switch capacity	Each output Ch. is 100mA at 24VDC
Response time	On to Off, about 50μs; Off to On, about 10μs
Over current protection	1A (Max) for each port (8-Ch.)
Power input	24VDC±10%
Power consumption	3W typical
Working temperature	0 to 60°C

Ordering Information

207-D222-NNS	16-Ch. Digital Input (DI) and 16-Ch. Digital Output (DO) with NPN type
207-D222-PPS	16-Ch. Digital Input (DI) and 16-Ch. Digital Output (DO) with PNP type
SCB-1BB-06A/10A /20A/30A/50A/A0A	CAT5 LAN cable, 0.6M/1M/2M/3M/5M/10M

Dimensions and Drawing

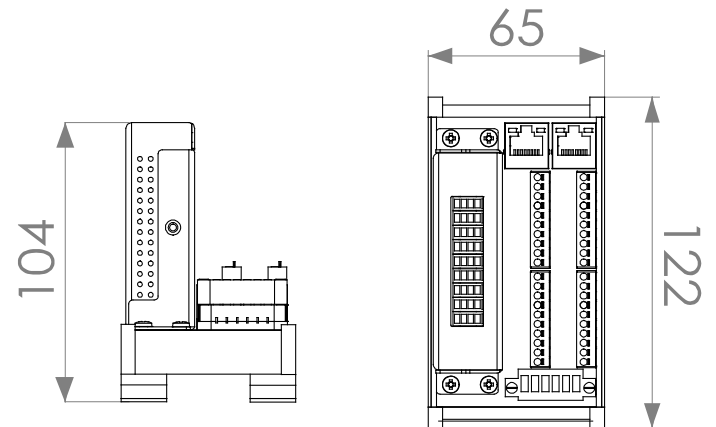

01 EtherCAT Digital Slave

02 EtherCAT Analog Slave

03 EtherCAT Motion Slave

04 EtherCAT Microstep Driver

05 EtherCAT Start-KIT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Ibase](#) manufacturer:

Other Similar products are found below :

[70L-OAC-L](#) [G21960000700](#) [G34960002700](#) [G88104401](#) [IDC-5B](#) [OACU](#) [C4SWOUT](#) [FC6A-T32K3](#) [SNAP-OAC5MA](#) [FC6A-N16B3](#)
[FC6A-N32B3](#) [FC6A-T16P3](#) [G3TAOD201SDC24](#) [PB32HQ](#) [PB16T](#) [PB8](#) [PB8H](#) [C200H-OD211](#) [GT1-AD04CST](#) [GT1-DA04](#) [70GRCQ24-](#)
[HS](#) [M-OAC5](#) [G4OAC24AMA](#) [2736505](#) [6202](#) [6402](#) [IL MOD BK DI8 DO4-PAC](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-N08A11](#) [FC6A-M24BR1](#)
[FC6A-K4A1](#) [FC6A-T32P3](#) [9-1393028-2](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [WISE-4050/LAN-B](#) [WISE-S614T-A](#) [ADAM-4068-C](#)
[56475](#) [ADAM-4017+-F](#) [ADAM-4118-C](#) [AMAX-4856-B](#) [WISE-4050-B](#) [ADAM-4051-C](#) [ADAM-4053-F](#) [GT1-AD08MX](#) [TM5SDO6TBFS](#)
[70Q3446](#)