


# GT06 Series Gate Drive Transformer

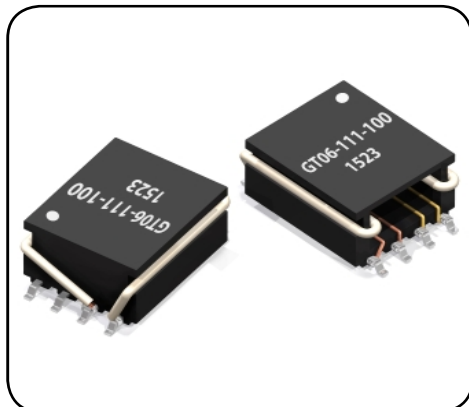

## FEATURES

- 12.5 mm creepage/clearance
- Optimized for frequencies from 40 kHz to 350 kHz
- Suitable for pick and place applications


## PACKAGING

- Reel Diameter: 13"
- Reel Width: 32mm
- Pieces Per Reel: 400


## APPLICATIONS

- Gate Drive Transformer
- Signal Transformer Across Isolation Barrier


## Mechanical

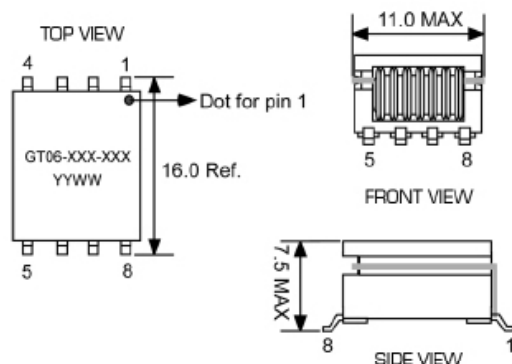

## Recommended PCB Layout



## Schematic

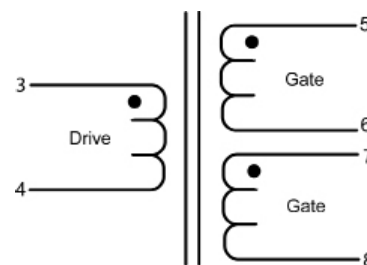

## Electrical Specifications

Part Number	Turns Ratio Drive:Gate	Drive Ind. <sup>1</sup> (μH, min.)	DCR (mΩ, max.)	Lkg. Ind. (nH, max.)	E-T Prod <sup>5</sup> (V-μs)	Hi-Pot Drive:Gate	Hi-Pot Gate:Gate
GT06-111-049	1:1:1	882	720:720	360	49	3750 V <sub>ac</sub>	1,500 V <sub>dc</sub>
GT06-111-100	1:1:1	2000	1430:1300	470	100	3750 V <sub>ac</sub>	1,500 V <sub>dc</sub>
GT06-122-053	1:2.5:2.5	162	360:720	240	53	3750 V <sub>ac</sub>	1,500 V <sub>dc</sub>

1. Tested at 100kHz, 0.1Vrms.
2. Electrical specifications at 25°C.
3. Operating range: -40° C to +130° C.
4. Meets UL 94V-0.
5. E-T product rating is for secondary (gate) windings in a bipolar drive application at 25°C. Derate the E-T product rating by 20% for operation at 100°C.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pulse Transformers](#) category:*

*Click to view products by [ICE](#) manufacturer:*

Other Similar products are found below :

[E4001NLT](#) [1879401-1](#) [IF-18-0269-N](#) [T1049NL](#) [PE-68023NL](#) [PH0905NL](#) [PT4163S](#) [PT5010](#) [PA0173NLT](#) [CTX02-14608](#) [PE-65457NLT](#)  
[T60403-D4721-X088](#) [H1183NLT](#) [CTX33-18971-R](#) [HM2108NLT](#) [HM0068ANLT](#) [PG1427.001NLT](#) [750313723](#) [750031353](#)  
[PH9400.566NLT](#) [PH9400.655ANLT](#) [PH9400.655NLT](#) [PH9385.013NLT](#) [B78307A2276A003](#) [HX6096FNL](#) [HX6106NLT](#) [P0926NL](#)  
[HX6096NL](#) [PA3493NLT](#) [P0585ANL](#) [H1183NL](#) [HU4102NL](#) [PH9385.012NLT](#) [PH9400.111NLT](#) [PH9400.211NLT](#) [PH9400.233ANLT](#)  
[SMQC1553-6](#) [SMQ1553-45](#) [Q1553-45](#) [Q1553-22](#) [Q1553-21](#) [PH9400.211ANLT](#) [TGMR-1450V6LF](#) [TGMR-360V6LF](#) [P0544](#) [PA0264NLT](#)  
[T60403-D4215-X014](#) [T60403-F4185-X035](#) [CTX02-13400](#) [CTX02-14121](#)