


GT06 Series Gate Drive Transformers

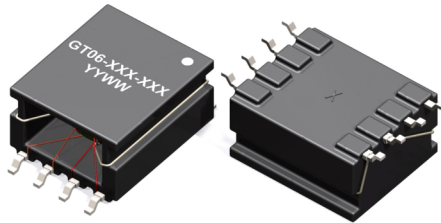

FEATURES

- 12.5 mm creepage/clearance
- Optimized for frequencies from 40 kHz to 350 kHz
- Suitable for pick and place applications

APPLICATIONS

- Gate Drive Transformer
- Signal Transformer Across Isolation Barrier


PACKAGING

Reel Diameter: 13"


Reel Width: 32 mm

Pieces Per Reel: 400


Mechanical Drawing

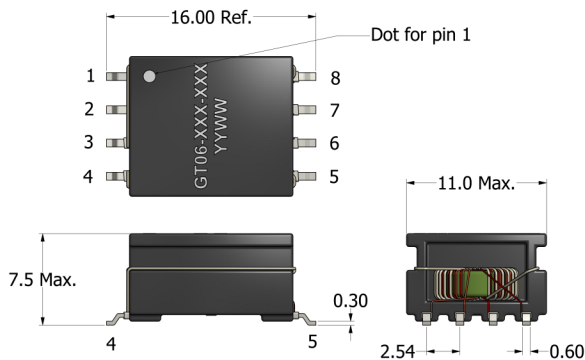

Recommended PCB Layout

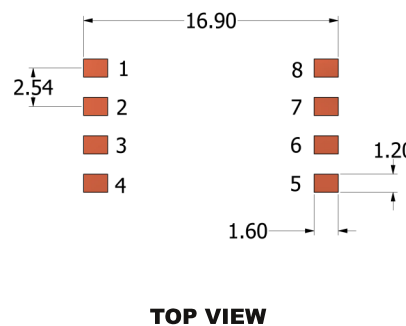

Schematic



Unit: mm

Electrical Specifications

Part Number	Turns Ratio Drive:Gate	Drive Ind. ¹ (μ H, min.)	DCR ² (m Ω . max.)	Lkg. Ind. (nH,max.)	E-T Prod. ⁵ (V- μ s)	Hi-Pot (Drive:Gate)	Hi-Pot (Gate:Gate)
GT06-111-049	1:1:1	882	720:720	360	49	3750 V _{AC}	1500 V _{DC}
GT06-111-100	1:1:1	2000	1430:1300	470	100	3750 V _{AC}	1500 V _{DC}
GT06-122-053	1:2.5:2.5	162	360:720	240	53	3750 V _{AC}	1500 V _{DC}

1. Tested at 100kHz, 0.1 V_{rms}.
2. Electrical specifications at 25°C.
3. Operating range: -40°C to +130°C.
4. Meets UL 94V-0.
5. E-T product rating is for secondary (gate) windings in a bipolar drive application at 25°C. Derate the E-T product rating by 20% for operation at 100°C.



Specifications subject to change without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pulse Transformers](#) category:

Click to view products by [ICE](#) manufacturer:

Other Similar products are found below :

[E4001NLT](#) [1879401-1](#) [IF-18-0269-N](#) [T1049NL](#) [PE-68023NL](#) [PH0905NL](#) [PT4163S](#) [PT5010](#) [PA0173NLT](#) [CTX02-14608](#) [PE-65457NLT](#)
[T60403-D4721-X088](#) [H1183NLT](#) [CTX33-18971-R](#) [HM2108NLT](#) [HM0068ANLT](#) [PG1427.001NLT](#) [750313723](#) [750031353](#)
[PH9400.566NLT](#) [PH9400.655ANLT](#) [PH9400.655NLT](#) [PH9385.013NLT](#) [HX6096FNL](#) [HX6106NLT](#) [P0926NL](#) [HX6096NL](#) [PA3493NLT](#)
[P0585ANL](#) [H1183NL](#) [HU4102NL](#) [PH9385.012NLT](#) [78601/9JC-R](#) [PH9400.111NLT](#) [PH9400.211NLT](#) [PH9400.233ANLT](#) [SMQC1553-6](#)
[SMQ1553-45](#) [Q1553-45](#) [Q1553-22](#) [Q1553-21](#) [PH9400.211ANLT](#) [TGMR-1450V6LF](#) [TGMR-360V6LF](#) [P0544](#) [PA0264NLT](#) [T60403-](#)
[D4215-X014](#) [T60403-F4185-X035](#) [CTX02-13400](#) [CTX02-14121](#)