

Open Frame AC Input AT Type

ACE-890A

86 W AC-DC Open Frame AT Power Supply



PFC




Input Type	85 ~ 264 VAC Full Range				
Input Frequency	47~63Hz				
Input Current	2A (RMS)@115VAC, 1A (RMS)@230VAC				
Inrush Current	25A Max for 115VAC, 50A Max for 230VAC				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-890A	10 A	2.5 A		0.5 A	
Efficiency	70%				
Temperature	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
MTBF (hrs)	268,000				
Output Connector	Optional Cable				
Dimensions	152.4 x 89 x 39 mm				

Ordering Information

Part No.	Description
ACE-890A-RS	86W AC-DC Open Frame AT Power Supply

Dimensions (Unit: mm)

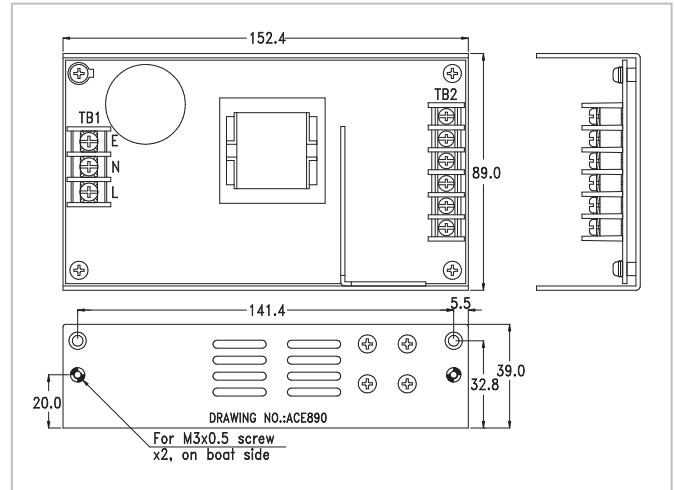

Option 1

AT P8P9 Backplane Solution



PN: CB-890P8P9-RS

30 cm DC cable AT power to P8P9, HDD and SATA connectors

ACE-870A

70 W AC-DC Open Frame AT Power Supply



PFC




Input Type	85 ~ 264VAC Full Range				
Input Frequency	47~63Hz				
Input Current	1.5A (RMS)@115VAC, 0.8A (RMS)@230VAC				
Inrush Current	25A Max for 115VAC, 50A Max for 230VAC				
Output Voltage	+5V	+12V	-5V	-12V	+24V
	7A	2.5A	0.3A	0.3A	
Efficiency	70%				
Temperature	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
MTBF (hrs)	296,000				
Output Connector	Optional Cable				
Dimensions	127 x 81 x 50 mm				

Ordering Information

Part No.	Description
ACE-870A-RS	70W AC-DC Open Frame AT Power Supply

Dimensions (Unit: mm)

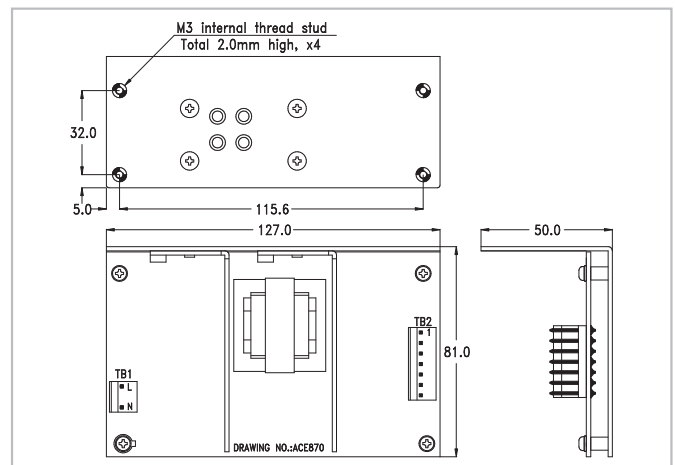

Option 1

AC Input Solution



PN: CB-870EC-RS

20 cm AC input cable with fuse

Option 2

AT P8P9 Backplane Solution



PN: CB-870P8P9-RS

30 cm DC cable AT power to P8P9, HDD and SATA connectors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [IEI](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)