


inspired LED

# Designer Series Panels 1.0

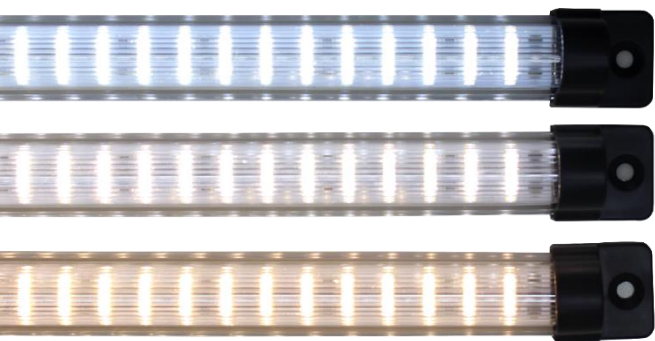

Inspired LED's **Clear Designer Series Panels** are an ideal low-voltage LED lighting solution for any application, from under cabinet task lights in the kitchen, to accent lighting on shelves or display cases. These low-profile panels utilize an acrylic lens to create a modern looking fixture, which can be easily combined with Inspired LED accessories to create the perfect lighting system for your home or business.

### Product Features:

- Low cost modular design
- Simple plug & play installation
- Clear lens for a modern, finished look
- Low energy consumption
- Rated to last up to 100,000 hrs
- UV and IR free
- Dimmable with compatible systems


### Specifications:

- CSA listed (C22.2 No. 250.0-08)
- Input: 12V DC Class 2 Power (3.5 x 1.3mm jack)
- Power: 1.5W per 10" panel (3W per 18" panel)
- Dimensions: 10" x 0.87" x 0.67" or 18" x 0.87" x 0.67"
- Color Temp: Warm≈ 3000K, Pure≈ 4300K, or Cool≈ 6000K
- Lumens/10": Warm≈ 130 lm, Pure≈ 140 lm, Cool≈ 145 lm
- CRI: 90



18" Designer

10" Designer

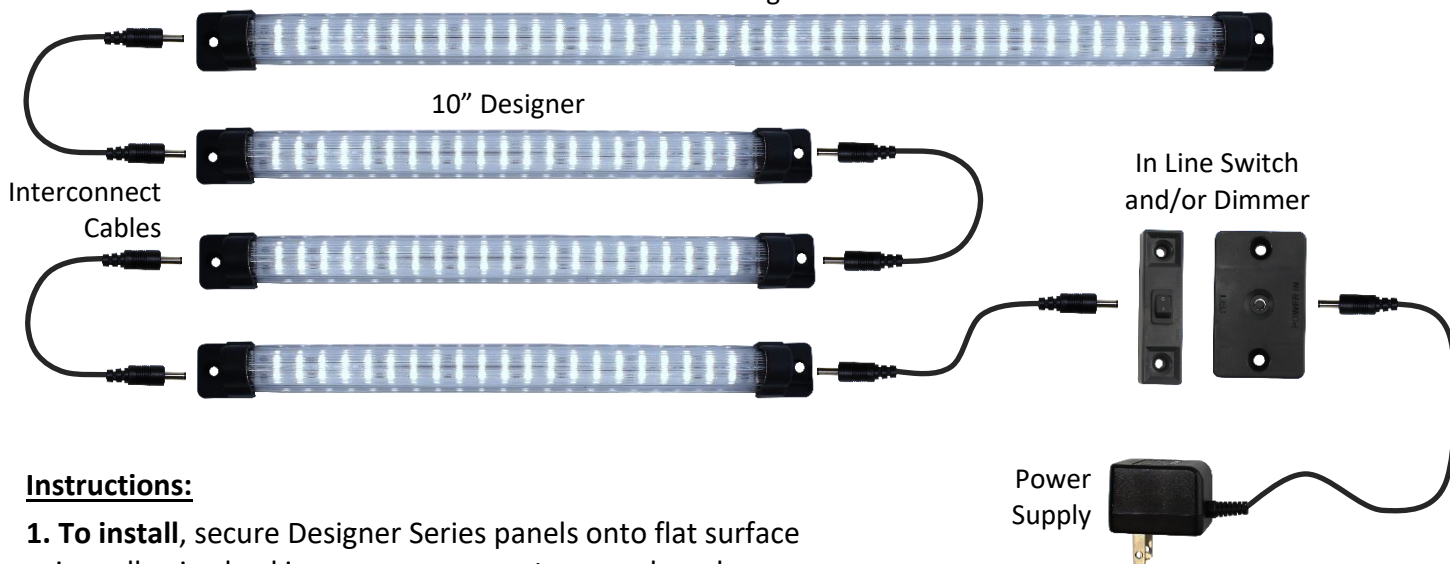

### Instructions:

- 1. To install**, secure Designer Series panels onto flat surface using adhesive backing, or screw mounts on each end
2. Make connections between panels using Inspired LED interconnect cables, plugged in from end to end
3. Connect cable from first panel in series to in line switch and/or dimmer, then connect to plug-in power supply or
4. Connect cable from first panel in series to hardwire transformer, then connect transformer to dimmable wall switch (*see hardwire transformer specs for more detail*)

Power Source	Max # of Designer Series Panels	
	10"	18"
1 Amp (12 Watt)	6 panels	3 panels
2 Amp (24 Watt)	11 panels	5 panels
40 Watt Dimmable Transformer	21 panels	10 panels
3.8 Amp (45.6 Watt)	24 panels	12 panels
5 Amp (60 Watt)	32 panels	16 panels
60 Watt Dimmable Transformer	32 panels	16 panels
100 Watt Dimmable Transformer	53 panels	26 panels
150 Watt Dimmable Transformer	80 panels	40 panels



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Fixtures](#) category:*

*Click to view products by [Inspired LED](#) manufacturer:*

Other Similar products are found below :

[1301080067](#) [XVEC21P](#) [XVEC2B7](#) [2576960000](#) [113163000-00662717](#) [113472000-00691461](#) [XVBC2B3](#) [XVBC2B7](#) [XVBC4B4](#) [XVBC4B5](#)  
[XVBC4B6](#) [XVBC4M3](#) [XVBC4M4](#) [XVBC4M5](#) [XVBC4M8](#) [XVBZ01](#) [XVBZ03A](#) [XVBZ04](#) [E35600](#) [NB-RLAMP01-LED](#) [FLK7LED](#)  
[XVBZ04A](#) [XVBC4M7](#) [XVBC4M6](#) [XVBC4B3](#) [XVBC2B8](#) [2700127](#) [2702933](#) [2702477](#) [89406068](#) [148-00076](#) [190007019-00014904](#)  
[226108019-00610754](#) [4823](#) [4824](#) [4868](#) [11212573001-00514271](#) [112887037-00076065](#) [113021000-00564565](#) [113473000-00704968](#) [NB-](#)  
[RLAMP01](#) [112577000-00539774](#) [113458000-00668976](#) [SL7/4-FW](#) [LML-6TER-CAB](#) [SL4-FMS-100](#) [SL4-FMS-400](#) [SL7-CB-400](#) [SL7-CB-](#)  
[T-250](#) [SL7-FMS-100](#)