

5012 Mini RGB Controller



Summarization

Mini RGB controller is a strip controller. It presents 19 dynamic modes and 20 static colors, at the top performance of similar products. You can easily change mode, speed, color and brightness by pressing 3 keys on it's ultra slim body. R101 also has auto memorize function and can output up to 144 watts power. It's the best mate of your LED strips.

Main feature

- 20 static colors
- 256-level PWM control mode
- Auto-cycle dynamic mode
- Speed and brightness adjustable
- Up to 144 power
- Auto memorize function
- Easy operate keys
- Ultra slim design

Button Functions




- ▲ OUTPUT Mate positive side of included connector with identifier symbol on controller (marked with triangle)
- MODE Pressing "MODE" enters dynamic color changing modes. Press "MODE" to cycle through the 19 different patterns. Speed control is adjustable (5 levels) by pressing "SPEED/BRIGHT" button.
- SPEED/BRIGHT "SPEED/BRIGHT" button incrementally decreases the pattern's speed or color's brightness 5 steps then returns to highest level.
- COLOR Pressing "Color" enters static color selection. Press "Color" to cycle through the 20 diff "SPEE"

Technical Parameters

- Working temperature: -30°C ~ +75°C
- Working voltage: DC8-16V
- Dynamic mode : 19 modes
- Static colors: 20
- PWM control level: 256 levels
- Speed grade of dynamic mode: 5 levels
- Brightness level of static color: 5 levels
- Max out current: 3*4A
- Max output power: 144W
- Dimension: 42*12*3mm

Typical Wiring Schematic

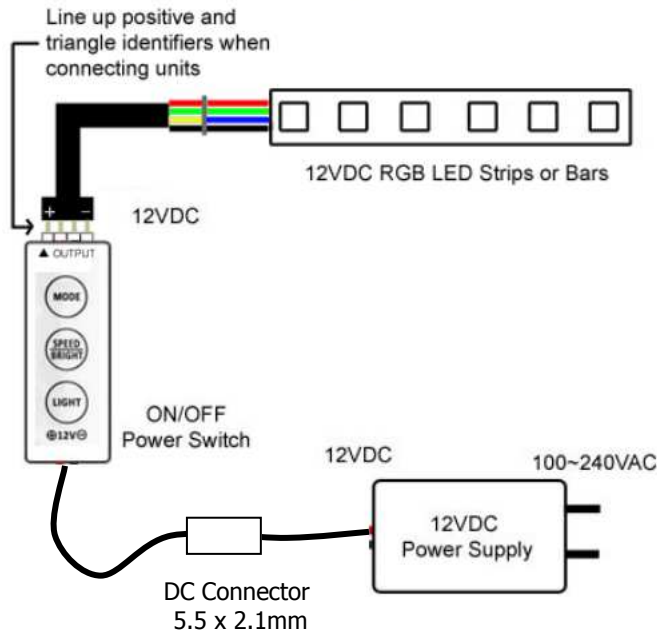

Mode List

Static Colors: (Select "COLOR")		Dynamic Color Changing: (Select "MODE")	
1. Blue	11. Orange	1. Random	11. Tri-color instant change
2. Green	12. Yellow	2. Seven-color fade	12. Seven-color instant change
3. Red	13. Lime Green	3. Tri-color crossfade	13. Tri-color strobe
4. Ultra-Violet Blue	14. Aqua	4. Seven-color crossfade	14. Blue strobe
5. Light Blue	15. Sky Blue	5. Blue fade in/out	15. Aqua strobe
6. Indigo	16. Pure White	6. Aqua fade in/out	16. Green strobe
7. Purple	17. Cool White	7. Green fade in/out	17. Red strobe
8. Light Purple	18. Super Cool White	8. Yellow fade in/out	18. White strobe
9. Magenta	19. Blue White	9. Red fade in/out	19. Seven-color strobe
10. Coral	20. Deep Blue	10. White fade in/out	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Fixture Accessories](#) category:

Click to view products by [Inspired LED](#) manufacturer:

Other Similar products are found below :

[XVBC081](#) [1-2315539-1](#) [2306129-1](#) [180997-0001](#) [1-2213996-1](#) [4821](#) [2702312](#) [4775](#) [5012](#) [5014](#) [1301130007](#) [1301120097](#) [1301120099](#)
[1301120101](#) [1301120114](#) [1301120153](#) [1301120154](#) [1301120157](#) [1301120174](#) [1301120110](#) [1301120137](#) [1301120130](#) [1301860719](#)
[1301120131](#) [1301120144](#) [1301120196](#) [1301850471](#) [2702313](#) [2702315](#) [2702316](#) [2702493](#) [XVBC030](#) [XVBC14](#) [XVBC21](#) [2213730-1](#)
[VFTBCSN1002FT](#) [VFTBCSP0102FT](#) [VFTJCSN0402FT](#) [VFTPCSN1010FT](#) [VFTPCSP0110FT](#) [XVBC00](#) [XVBC020](#) [1-2311664-1](#) [2702492](#)
[2213871-2](#) [2306132-1](#) [2213805-1](#) [1-2306133-1](#) [2702527](#) [2315539-1](#)