


Single Row Angle Adjust Tube Lighting from Inspired LED




Mounting Options to Meet Every Need:

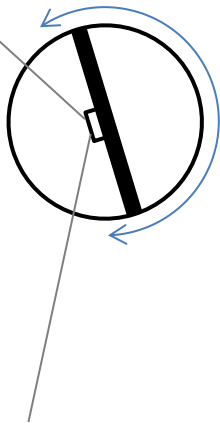

- Direct your light where it's most needed.
- Snap-in mounts allow for simple grab and twist adjustment.
- Powered by 12VDC source from Inspired LED:
 - Plug-in Power Supplies
 - Hard-wire Dimmable Transformer
- Available in Warm White (3000K) or Cool White (6000K).
- Each LED outputs roughly 6.5 lumens with a 120° viewing angle.
 - Rated for 100,000 hours of use.
 - No IR or UV light – safe for lighting delicate materials.
- Available in standard sizes:
 - 21 LED (9 inches)
 - 42 LED (17 inches)
- Available in custom lengths from 3.5" to 60.5"
 - Increments of roughly 1.25"
 - Call for lengths longer than 60.5"
- Manufactured in Tempe, Arizona.

Power Source	Maximum Capacity		
	21 LED	42 LED	Custom
1 Amp (12 Watt)	8 Tubes	4 Tubes	54.5"
1 Amp Mini (12 Watt)	8 Tubes	4 Tubes	54.5"
1.5 Amp Skinny (18 Watt)	12 Tubes	6 Tubes	70"
2 Amp (24 Watt)	18 Tubes	9 Tubes	108.5"
40 Watt Dimmable Transformer	30 Tubes	15 Tubes	180"
3.8 Amp (45.6 Watt)	34 Tubes	17 Tubes	205"
60 Watt Dimmable Transformer	45 Tubes	22 Tubes	269.5"
100 Watt Dimmable Transformer	75 Tubes	37 Tubes	448.5"

12V DC Power Supply

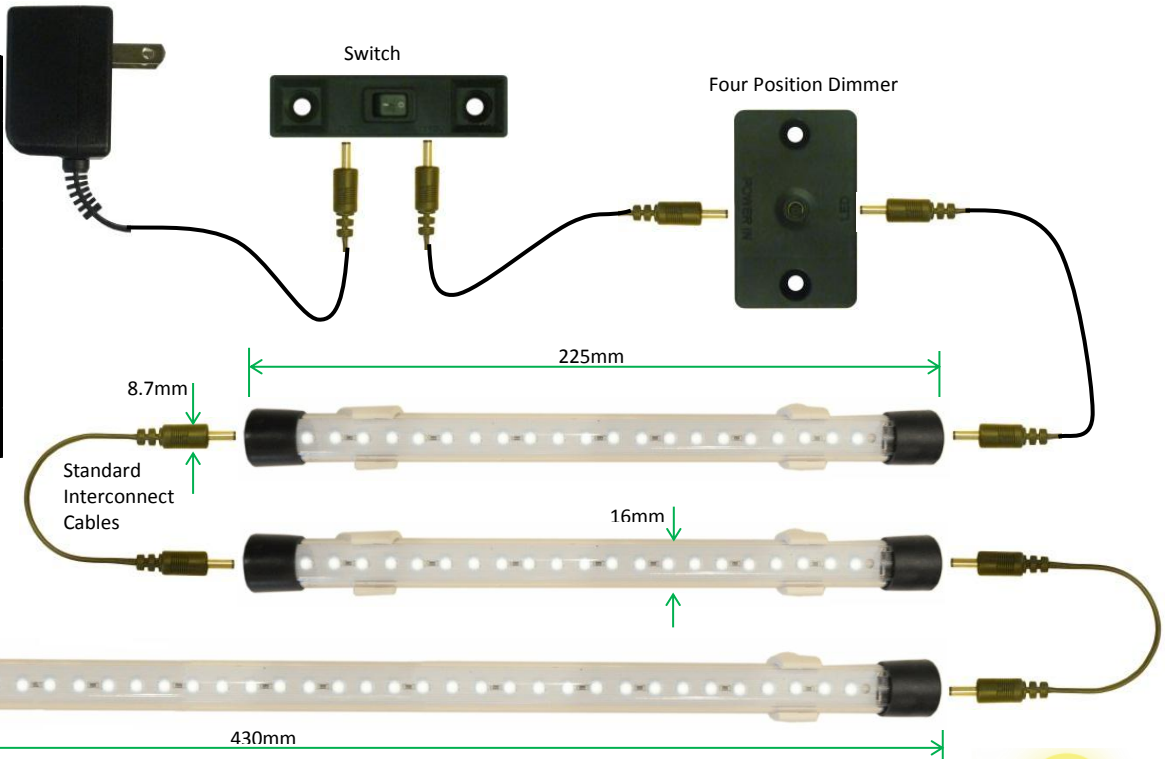

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Fixtures](#) category:

Click to view products by [Inspired LED](#) manufacturer:

Other Similar products are found below :

[1301080067](#) [XVEC21P](#) [XVEC2B7](#) [2576960000](#) [113163000-00662717](#) [113472000-00691461](#) [XVBC2B3](#) [XVBC2B7](#) [XVBC4B4](#) [XVBC4B5](#)
[XVBC4B6](#) [XVBC4M3](#) [XVBC4M4](#) [XVBC4M5](#) [XVBC4M8](#) [XVBZ01](#) [XVBZ03A](#) [XVBZ04](#) [E35600](#) [NB-RLAMP01-LED](#) [FLK7LED](#)
[XVBZ04A](#) [XVBC4M7](#) [XVBC4M6](#) [XVBC4B3](#) [XVBC2B8](#) [2700127](#) [2702933](#) [2702477](#) [89406068](#) [148-00076](#) [190007019-00014904](#)
[226108019-00610754](#) [4823](#) [4824](#) [4868](#) [11212573001-00514271](#) [112887037-00076065](#) [113021000-00564565](#) [113473000-00704968](#) [NB-](#)
[RLAMP01](#) [112577000-00539774](#) [113458000-00668976](#) [SL7/4-FW](#) [LML-6TER-CAB](#) [SL4-FMS-100](#) [SL4-FMS-400](#) [SL7-CB-400](#) [SL7-CB-](#)
[T-250](#) [SL7-FMS-100](#)