

### Features:

- CPU microprocessor control unit
- AVR – automatic voltage regulation
- Frequency auto-select
- Friendly buzzer
- Startup auto-diagnostic
- Cold start
- Advanced battery management
- Overcurrent protection, low battery voltage protection
- Auto-battery charger in OFF mode
- USB communication port (option)
- Auto recovery after mains supply back

**Application:** Low power telecommunication systems, personal computers , cctv, access control systems, control systems, measuring systems.



1f/1f




AUTO RECOVER



## Technical parameters:

MODEL	TM-LI-0k8-MC-1x9-IEC	TM-LI-0k8-MC-1x9-IEC-USB
Output power (apparent/active)	800VA/480W	
<b>INPUT</b>		
Rated input voltage	230Vac ± 25%	
Input voltage range	50/60 Hz ± 0,5%Hz	
<b>OUTPUT</b>		
Output voltage	230Vac ± 10%	
Frequency	50/60Hz ± 0,2Hz	
Output waveform	Mains mode: pure sine wave Battery mode: modified sine wave	
Crest factor	3:1	
Transfer time	Typical: 2-7ms, max: 10ms	
Output sockets	2pcs IEC C13	
<b>BATTERY</b>		
Working voltage	12V	
Configuration	1x 12V/7Ah	
Backup time (min.) 100%/75%/50%	2 min / 5min / 8min	
Typical recharge time	6-8 hours for 90% capacity	
<b>PROTECTIONS</b>		
Full protection	Short circuit, overload, low battery	
<b>ENVIRONMENT</b>		
Humidity	20~90% RH @ 0~40°C (non-condensating)	
Noise level	≤ 45 dB	
<b>COMMUNICATIONS</b>		
USB (Standard) /RS-232 (option)	None	Support with Windows®98/2000/2003/XP/Vista/2008/ Windows®7/Windows®8
<b>DIMMENSION &amp; WEIGHT</b>		
Weight netto/brutto (kg)	4,3/4,8	
Lenght/width/height (mm) a / b / c	100/320/165	
Box lenght/width/height (mm)	145/380/230	
Shiping box	3pcs	
<b>STANDARDS</b>		
LVD	EN62040-1:2008	
EMC compability	EN62040-1:2006	
	EN61000-3-2:2006 + A1:2009 + A2:2009	
	EN61000-3-3:2013	

Technical drawings:

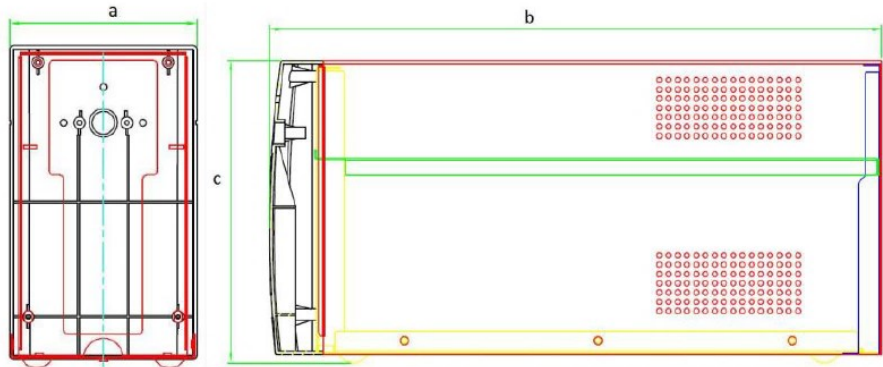

Standard accessories:

- internal batteries 12V/7Ah
- User manual



Additional accessories (options):

- RS-232 port
- USB port
- internal batteries MWH 9-12, MW 7.2-12, MWL 7.2-12
- UPSmart software
- USB cables



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [IPS](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)  
[EVS57-10R6/R](#) [FDC40-24S12](#) [FP80](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)  
[432703037161](#) [WRB01X-U](#) [LPX140-C](#) [08-30466-1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#)  
[LPM000-BBAR-08](#) [LPM124-OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#)  
[DMB-EWG](#) [TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-](#)  
[MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#) [VI-RU031-EWWX](#) [08-30466-0028G](#)