
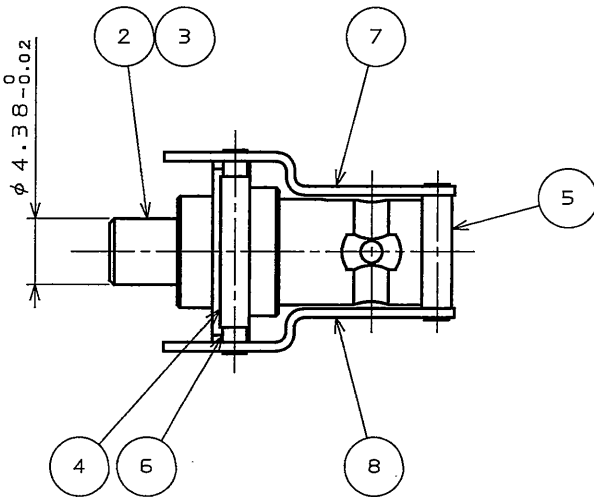
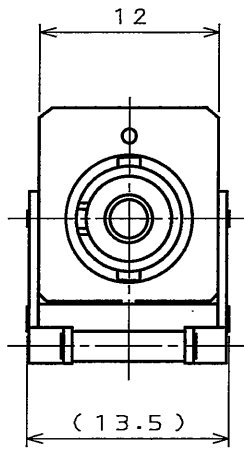


版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.

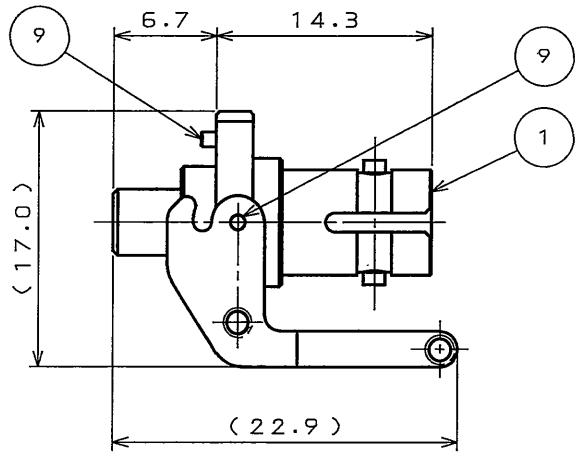

1.Optical Performance
(The performance when the item is mate
with FO-FC-RS-A-R(SJ104350))
Insertion Loss:0.4dB Max(note1)

note1.The value shows insertion loss in case
that a master optical connector,to which
PC connection is available,and a master
optical connector,to which PC connection
is available,are connected.

2.Mechanical Performance
Unhook force of lever:2.9N MIN

1.光学性能(FO-FC-RS-A-R(SJ104350)と嵌合した時の性能である)
挿入損失:0.4dB以下(注1)

注1.PC接続が可能なマスター光コネクタとPC接続が可能なマスター光コネクタを
接続した場合の値である。

2.機械性能
レバー離脱力:2.9N以上

9	PARALLEL PIN	3	STAINLESS STEEL		
8	LEVER B	1	STAINLESS STEEL		
7	LEVER A	1	STAINLESS STEEL		
6	LEVER PIN2	1	STAINLESS STEEL		
5	LEVER PIN1	1	STAINLESS STEEL		
4	STAINLESS PIPE	1	STAINLESS STEEL		
3	SLIT SLEEVE	1	PHOSPHOR BRONZE		
2	SLEEVE HOLDER	1	COPPER ALLOY	NICKEL PLATING	
1	FRONT SHELL (ST)	1	COPPER ALLOY	NICKEL PLATING	
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書(SPECIFICATION)		第1版(ORIGINAL DATE) 30.Jun.2005		尺度(SCALE) 2:1	シリーズ(SERIES) OPT
公差(GENERAL TOLERANCE)		製図 DR.	Y.HIROKI	名称(TITLE) FO-FC-FS(ST) -STD-PBS-R	
寸法(DIMENSION)		担当 CHK.	Y.HIROKI		
角度(ANGLES)		査閲 APPD.	H. Shinagawa		
. ±0.8		承認 APPD.	A. Onogawa		
.X ±0.4				質量(MASS)	
.XX ±0.1					
.XXX ±					
日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.				図面番号(DRAWING NO.) SJ104340	版数 (REV.) 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [JAE](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#)
[9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX101713](#)
[AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [17-300800](#) [181-011-126](#)
[181-011-S](#) [181-057-126](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F16-10S](#) [9440F20-18S](#)
[9446F16-10S-190](#) [953-106-50231](#) [953-120-5003](#) [955-120-5110](#) [1757711-1](#)