

**NEW**



PLUG IN SIM Card Connector  
compatible to GSM 11.11 Standard


CONNECTOR

MB-0194-1


January 2009

## SF8 Series

**RoHS Compliant**

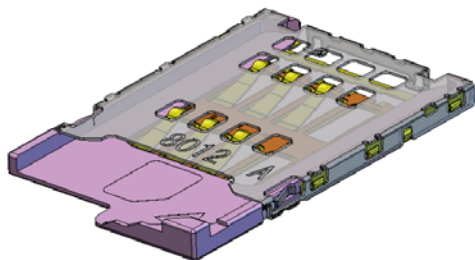

Standard

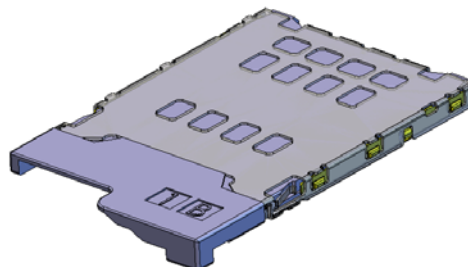

Reverse

SF8 Series is a tray type connector compatible with GSM 11.11 standard Plug in SIM card for GSM mobile phones.

(SIM: Subscriber Identification Module)

### Features

- Tray type connector for GSM 11.11 standard Plug in SIM card
- Low profile structure, 1.55mm height, 16.65mm width, 19.3mm depth (26.2mm when card is inserted).
- Two types of mounting, normal (A type) and reverse (B type).
- Connector main body is provided in emboss (compatible to second reflow), tray provided in tray (tray is attached after mounting the main body).
- 4 portions of H/D ensures EMI/ESD countermeasure and gives consideration to prevention of instantaneous interruption caused by falling.
- Retention lock on tray provides click feeling when mated, and makes positioning easier and also prevents falling of tray.


### General Specification

- |   |  |
|---|--|
| •No. of Contacts: 6pos.                               | •Rated Current: 10u A to 1A            |
| •Contact Resistance: 100m ohm max.                    | •Insulation Resistance: 1000M ohm min. |
| •Dielectric Withstanding Voltage: AC500Vr.m.s 1minute | •Lifetime: 5000 times                  |
| •Operating Temperature: -40 Deg. C to +90 Deg. C      |  |

Materials and Finishes

Component	Material/Finish
Contact	Copper alloy/0.5u min. Au over Ni (contact area)
Housing	Glass filled LCP/none(UL94V-0)
Cover Frame	Stainless steel/none, Au plating over Ni (terminal portion only)
Tray	POM/none (UL94HB)

Ordering Information

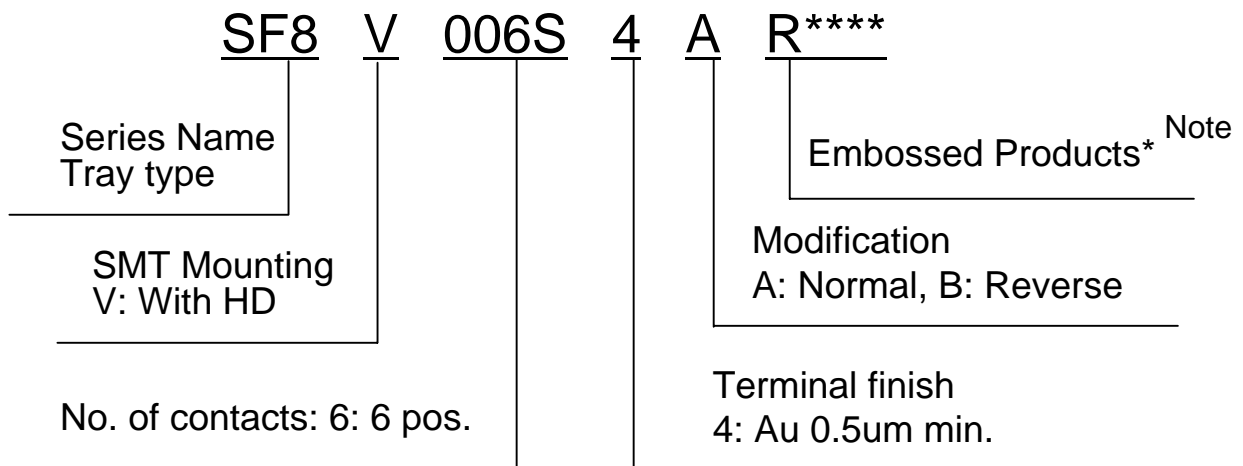

Note) Main body of connector is supplied in emboss, tray in tray packaging.  
Please contact us for further information.



Please refer to JAHL-10578 for assembly and handling of connector and tray.



Part Number	SJ Drawing
SF8V006S4B (main body of connector)	SJ109289
SF8-STR1-B (Type B tray)	SJ109290


Reverse Mounting Type

Unit: mm

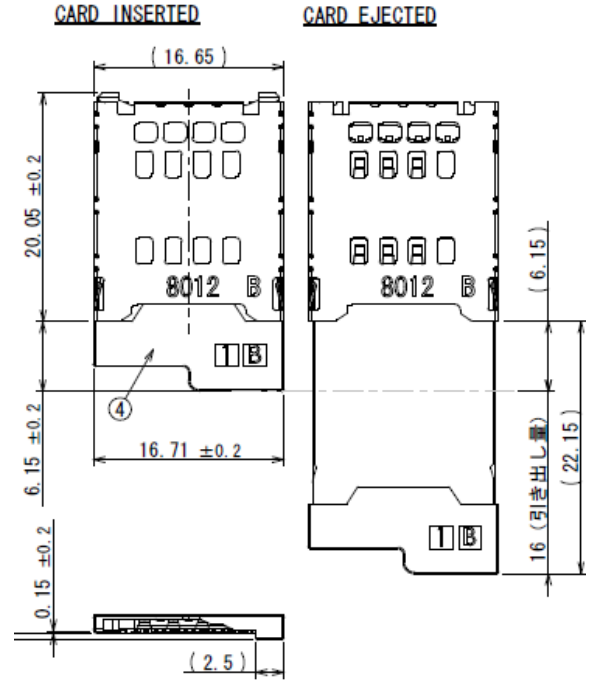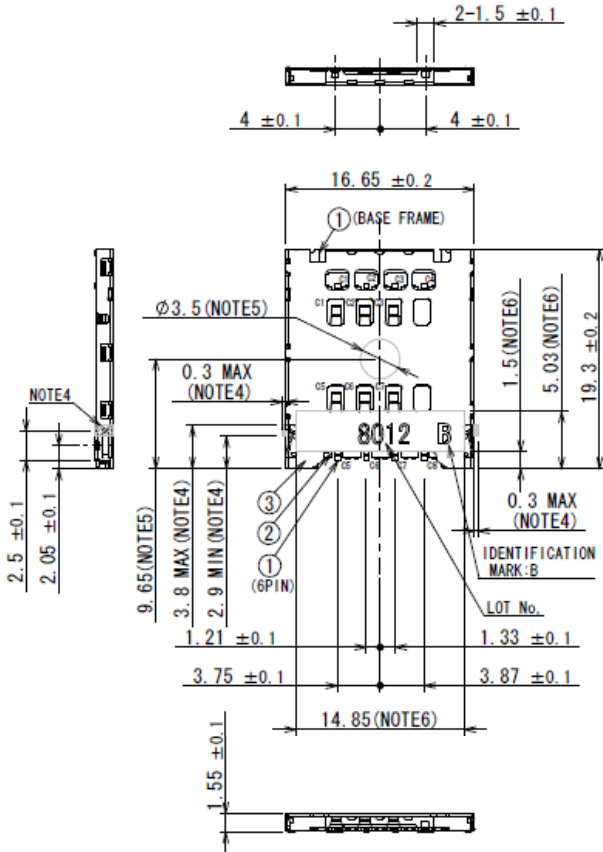

- NOTE1. NO PATTERN AND VIA HOLE SHOULD BE LOCATED IN THIS AREAS. BUT PATTERN OF GND IS APPROVAL
- NOTE2. NO PATTERN AND VIA HOLE SHOULD BE LOCATED IN THIS AREAS.
- NOTE3. NO PATTERN, VIA HOLE AND SOLDER RESIST IN THIS AREAS.
- NOTE4. NO PARTS LOCATED IN THIS AREA.
- NOTE5. VACUUM AREA
- NOTE6. LOT No. & IDENTIFICATION MARK AREA
- NOTE7. COPLANARITY SHOULD BE 0.1mmMAX.
- NOTE8. THE THICKNESS OF REINFORCEMENT BOARD IS 0.6MIN. WHEN THE PRODUCT WILL MOUNT ON FPC.

- 注1. パターン及びビアホール禁止エリアを示す。但し、GNDのパターンは可とする
- 注2. パターン及びビアホール禁止エリアを示す。
- 注3. パターン、ビアホール及びレジスト禁止エリアを示す。
- 注4. 部品搭載不可エリアを示す。
- 注5. 吸着エリア
- 注6. LOT No. 及び識別マークエリア (本品 : B)
- 注7. コプラナリティー0.1mm以下とする。
- 注8. FPC搭載時の補強板厚は0.6以上とする。



APPLICABLE P. C. B. DIMENSION (REF)  
=> Please refer to page 3/4.

**Notice:** Products shown in this leaflet are made for the applications listed below. However, if the above-mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for life-support systems, or any other specific application requiring extremely high reliability, please contact JAE for further information.

Recommended applications: Computers, Office machines, Measuring devices, Telecommunication devices (Terminals, Mobile devices), AV devices, Household applications, FA devices, etc.

Japan Aviation Electronics Industry, Limited

Product Marketing Division  
Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539  
Phone: +81-3-3780-2787 FAX: +81-3-3780-2946

\* The specifications in this brochure are subject to change without notice. Please contact JAE for information.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Memory Card Connectors](#) category:*

*Click to view products by [JAE](#) manufacturer:*

Other Similar products are found below :

[M21-033321-005](#) [6407-249V-25273P](#) [6407-249V-25343P](#) [6426-201-21343](#) [69.920.0553.0](#) [FCN-568P068-G/07-4V](#) [809180410000000](#)  
[N7E50-7516PG-20-WF](#) [21920-5](#) [2041353-2](#) [33CFAE-DN](#) [502431-1011](#) [EN2997S61212BN](#) [EN2997SE61212BN](#) [95622-003LF](#) [N7E50-](#)  
[U516RB-50-SIN0005](#) [95079-00CALF](#) [84648-056HLF](#) [68-580163-21S](#) [33DVIR-29S12R](#) [125A-78C00](#) [MI20A-50PD-SF-EJL\(71\)](#) [KP10S-SF-](#)  
[PEJ\(812\)](#) [504536-0691](#) [504580-0691](#) [CCM03-3109 B LFT](#) [2309923-1](#) [61126-050CAHLF](#) [IC1GA-68PD-1.27DS-EJ\(72\)](#) [GTFP08432B1HR](#)  
[G85DT17001P1EU](#) [G85B21611142HHR](#) [GSD090144HR](#) [G85D1140022P1HR](#) [GMCB05801124EU](#) [112K-TAA0-RA1](#) [115S-ACA2](#) [115S-](#)  
[ACA3](#) [115S-BS00](#) [115S-BT00](#) [115V-AD00](#) [MCSP-Q1-08-A-SG-T/R](#) [503960-0695](#) [101B-TAA0-R](#) [101D-TAAA-R01](#) [101D-TAAB-R01](#)  
[104D-TCA0-R06](#) [104B-TAA0-R](#) [112C-TBAR-R02](#) [114B-40B00-R02](#)