


JBC

www.jbctools.com

INSTRUCTION MANUAL

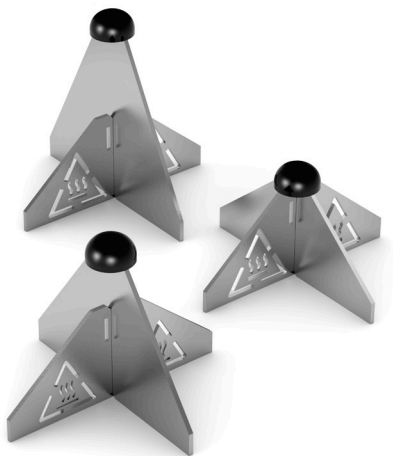

PH207, PH208, PH209

Metallic PCB Supports PHBS

This manual corresponds to the following references:

Ref. PH207

Ref. PH208

Ref. PH209

Packing List

The following items are included:



Metallic PCB Support 3 units
according to purchased Reference




Manual 1 unit
Ref. 0030722

Height Adjustment

Metallic PCB Supports are designed to be used with PHBS and allows to stabilize big-sized PCBs and avoid their deformation. Depending on the working needs, PCBs can be adjusted to 3 different height levels.

Supporting PCBs



Choose from 3 different metallic support sizes (PH207, PH208 or PH209) according to the working level and arrange them between the preheater and the PCB.

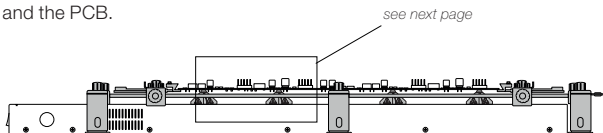

Support Models



L1 low-height level: 27 mm / 1.06 in

Ref. **PH207**





L2 medium-height level: 37 mm / 1.45 in

Ref. **PH208**



L3 high-height level: 47 mm / 1.85 in

Ref. **PH209**



Specifications

PH207, PH208, PH209

Metallic PCB Supports PHBS

Ref.: PH207

- Total Net Weight: 39.6 gr / 0.087 lb (3 units)
- Package Dimensions/Weight: 75 x 90 x 10 mm / 51.8 gr
(L x W x H) 2.95 x 3.54 x 0.39 in / 0.114 lb

Ref.: PH208

- Total Net Weight: 46.5 gr / 0.103 lb (3 units)
- Package Dimensions/Weight: 75 x 90 x 10 mm / 58.6 gr
(L x W x H) 2.95 x 3.54 x 0.39 in / 0.129 lb

Ref.: PH209

- Total Net Weight: 51 gr / 0.112 lb (3 units)
- Package Dimensions/Weight: 75 x 90 x 10 mm / 63.5 gr
(L x W x H) 2.95 x 3.54 x 0.39 in / 0.140 lb

Complies with CE standards.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.



www.jbctools.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [JBC Tools](#) manufacturer:

Other Similar products are found below :

[DI-2D](#) [DME-2A](#) [KNE-A](#) [C105-222](#) [C245-962](#) [0812620](#) [0008752](#) [C105-221](#) [T260-A](#) [0008467](#) [BE-SB](#) [C245-247](#) [CT-SA](#) [MS-A](#) [NP115-A](#)
[PH218](#) [PHS-SA](#) [QSC-A](#) [RWB-B](#) [0320705](#) [0320800](#) [C105-114](#) [C245-123](#) [C245-268](#) [C245-669](#) [C420-286](#) [C470-025](#) [C470-039](#) [C470-056](#)
[0552406](#) [HT470-A](#) [JN2012](#) [WSS-2A](#) [HRL-A](#) [HRR-A](#) [CLMS-B](#) [NH-A](#) [0014719](#) [ND20P](#) [BCB-5A](#) [0032465](#) [ND22P](#) [0032464](#) [KNE-B](#)
[C245-224](#) [PA120-A](#) [HT420-A](#) [JN2020](#) [JBC-R10D](#) [T2050](#)