



### Features

- High precision and high frequency stability;
- Extremely good for reducing EMI effect;
- The best choice of Bluetooth, wireless communication set, DSC, PDA, and mobile phone;
- RoHS Compliant / Pb Free

### Crystals specifications






ITEMS (项目)	PARAMETER (规格说明)	
Frequency Range	10-114MHz	100 ~ 400MHz
Frequency Tolerance (at 25 °C)	+/- 30ppm , or Specify	+/- 30ppm , or Specify
Frequency Stability Over Operating Temperature Range	+/- 30ppm , or Specify	+/- 30ppm , or Specify
Operating Temperature Range	-10~70 C, or Specify	-10~70 C, or Specify
Shunt Capacitance (C0)	3pF Max.	3pF Max.
Drive Level	1-200uW (100uW typical)	400uW max
Load Capacitance	10pF, or specify	10pF, or specify
Aging (at 25 °C)	+/- 3ppm/year Max	+/- 3ppm/year Max
Storage Temperature Range	-40 ~ +85 °C	-40 ~ +85 °C
Packing Unit	3,000pcs/Reel	

### Equivalent Series Resistance(ESR)

#### Fundamental

10-16MHZ	100 Ω Max
16-20MHZ	80Ω Max
20-64MHZ	60 Ω Max
100-400MHZ	30 Ω Max

### Dimensions

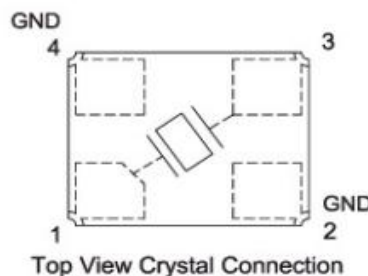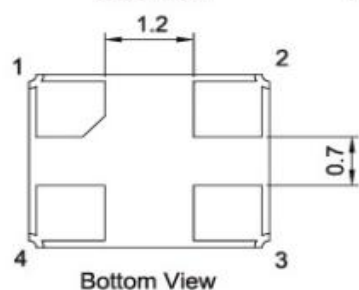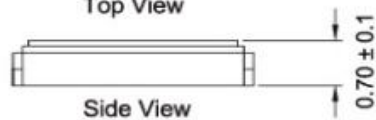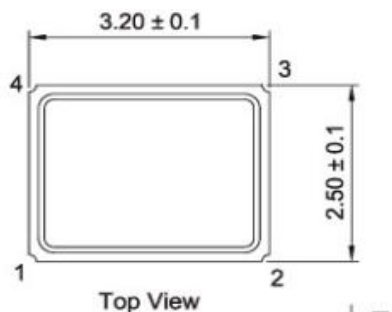

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [JGHC](#) manufacturer:*

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [MMCC2R32.7680KHZ](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#)