




SCHOTTKY BARRIER RECTIFIERS

FEATURES

- Low Forward Voltage Drop
- Surface Mount Package Ideally Suited for Automated Insertion
- Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

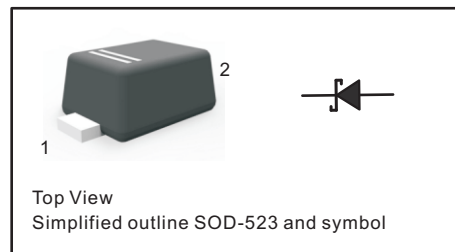

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbols	RB521S-30	Units
Reverse Voltage		V_R	30	V
Forward Continuous Current		I_F	200	mA
Non-Repetitive Peak Forward Surge Current @t = 8.3ms		I_{FSM}	1	A
Power dissipation		P_D	200	mW
Reverse Breakdown Voltage	$I_R = 500\mu A$	V_{BR}	30(Min)	V
Forward Voltage	$I_F=20mA$ $I_F=200mA$	V_F	0.37(Max) 0.60(Max)	V
Peak Reverse Current	$V_R=10V$	I_R	5.0(Max)	μA
Junction Temperature		T_j	125	°C
Storage Temperature		T_{stg}	-55 ~ +125	°C



Fig.1 Power Derating Curve

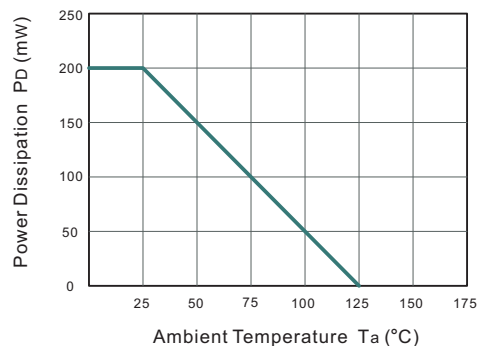


Fig.2 Typical Instaneous Reverse Characteristics


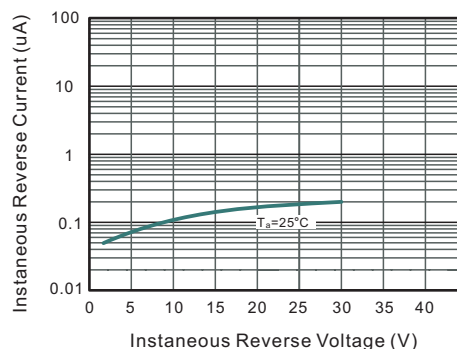


Fig.3 Typical Forward Characteristic




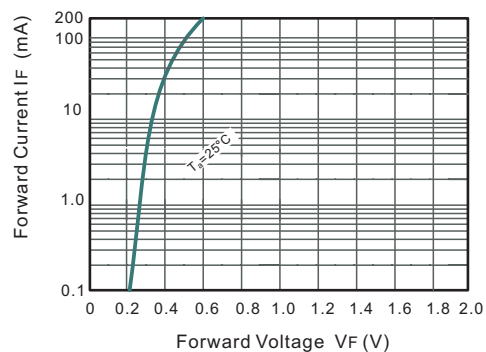


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

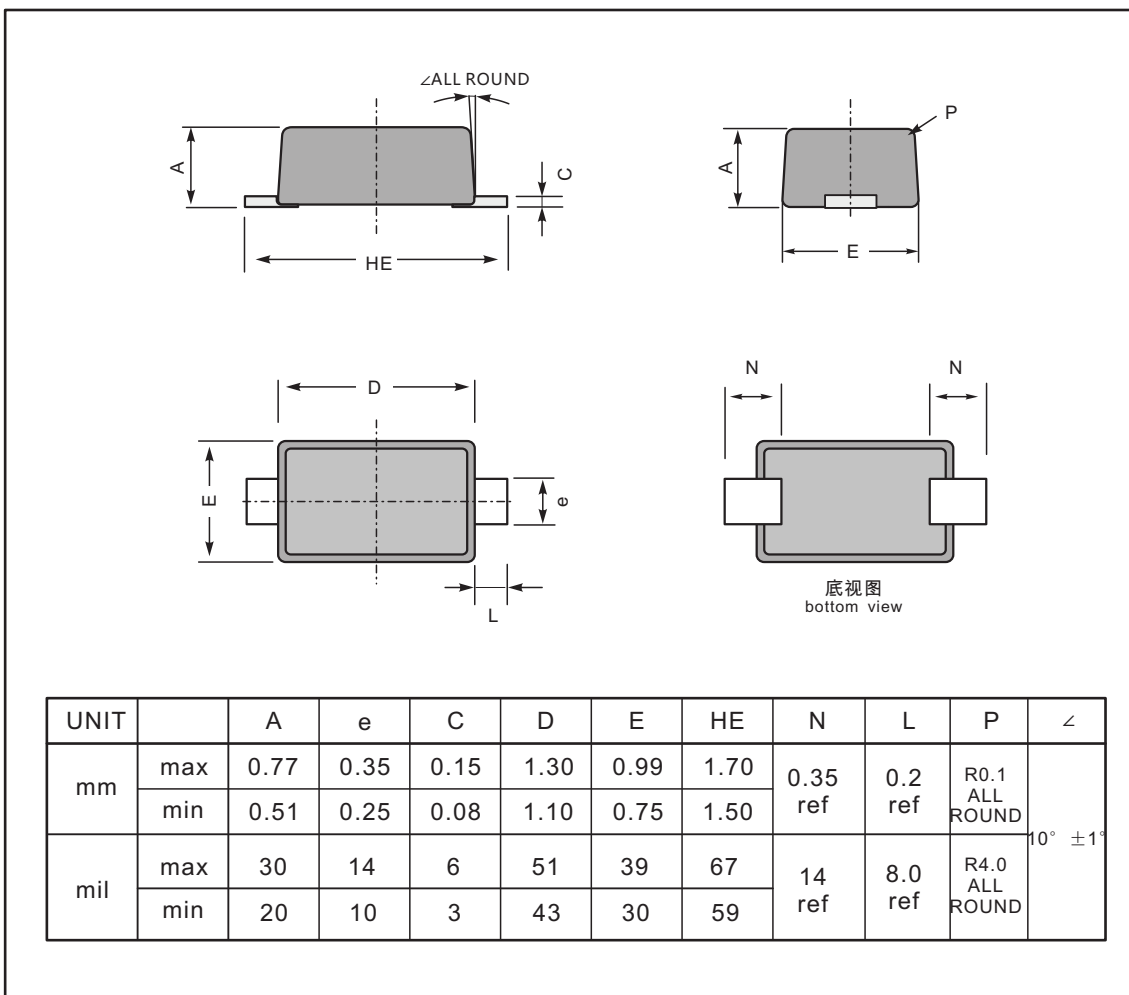

The recommended mounting pad size

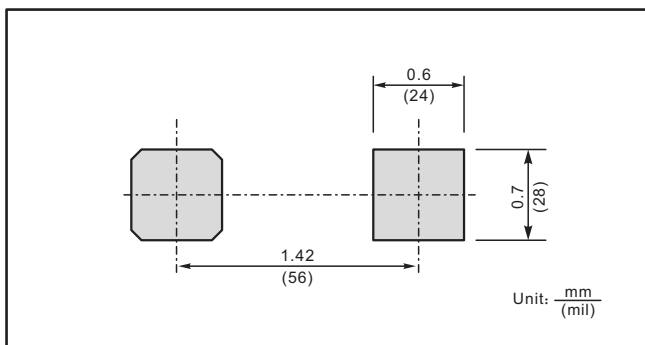

Marking

Type number	Marking code
RB521S-30	C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Jingdao](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)