


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/2/01
A	ADD NOTES	6/15/01
B	1816 CHANGE C-2V TO C-2F	11/16/07
C	1816 VENDOR CHNG FILAMENT	7/5/11

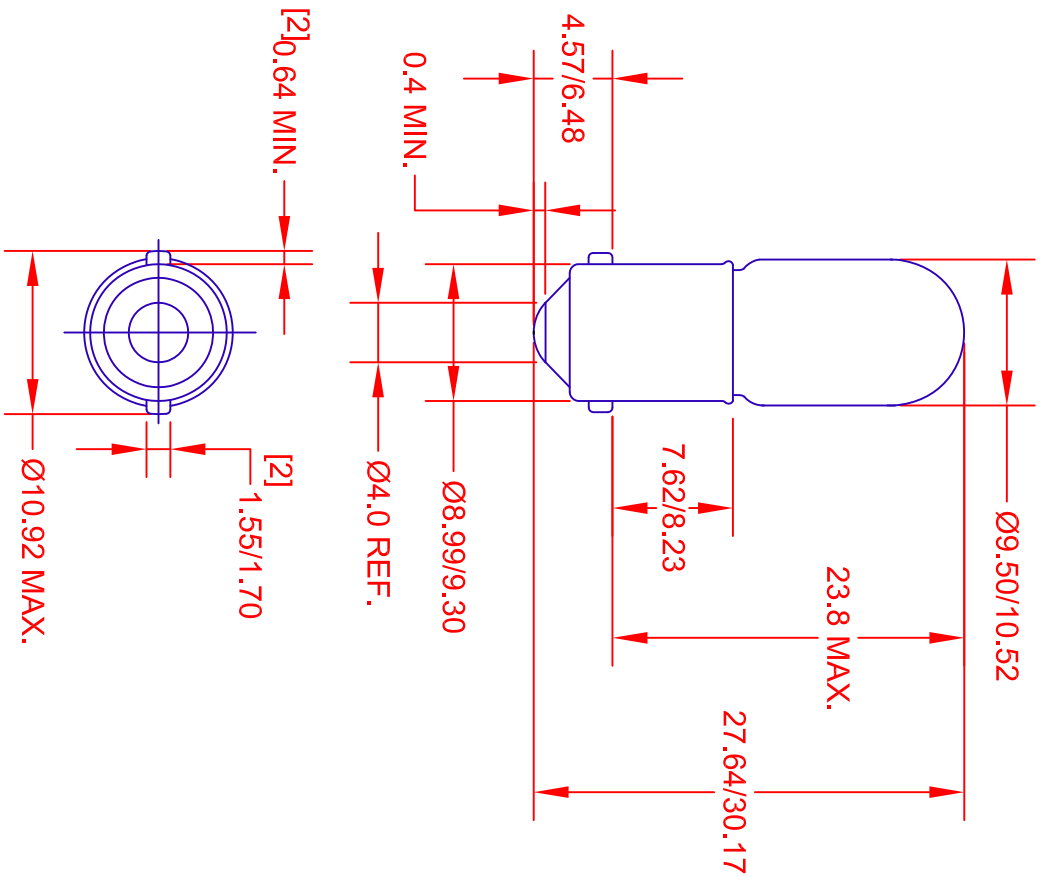

NOTES:
 1. FLASHER TYPE LAMPS HAVE A BI-METAL STRIP ADDED TO THE FILAMENT MOUNT TO PROVIDE THE FLASHING. HEAT FROM THE FILAMENT CAUSES THIS STRIP TO BEND AWAY FROM THE LEAD WIRE, BREAKING THE CIRCUIT. AS THE BI-METAL STRIP COOLS IT RETURNS TO ITS ORIGINAL POSITION AGAINST THE LEAD WIRE AND THE LAMP LIGHTS.

2. FLASHER TYPE LAMPS ARE DESIGNED TO RANDOMLY LINK AT THE APPROXIMATE RATE OF 50-150 FLASHERS PER MINUTE AT A NORMAL ROOM TEMPERATURE. SOME WILL BE OUTSIDE THIS RANGE. AS AMBIENT TEMPERATURE AND/OR INPUT VOLTAGE CHANGES, THE FLASH RATE MAY VARY CONSIDERABLY.

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	MSCP ±25%	LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
49	2.0	.060	.04	0.50	1,000	S-2
1436	2.5	.300	.30	3.77	1,000	C-2R
43	2.5	.500	.50	6.29	3,000	C-2R
1490	3.2	.160	.20	2.51	3,000	C-2R
45	3.2	.350	.50	6.29	3,000	C-2R
1850	5.0	.090	.25	3.14	1,500	C-2R
316	6.0	.700	3.40	42.74	500	C-2R
755	6.3	.150	.33	4.15	20,000	C-2V
47	6.3	.150	.52	6.54	3,000	C-2R
1866	6.3	.250	.65	8.17	10,000	C-2R
44	6.3	.250	.90	11.31	3,000	C-2R
1888	7.0	.500	2.00	25.14	3,000	C-2R
1816	13.0	.330	3.00	37.71	1,000	C-2V
756	14.0	.080	.31	3.90	15,000	C-2F
1815	14.0	.200	1.40	17.60	3,000	C-2V
1891	14.0	.240	2.00	25.14	500	C-2F
*256	14.0	.270	1.60	20.11	500	C-2R
1893	14.0	.330	2.00	25.14	7,500	C-2F
1813	14.4	.100	.86	10.81	1,000	C-2V
1892	14.4	.120	.75	9.43	1,000	C-2F
1818	24.0	.170	3.30	41.48	250	C-2F
1819	28.0	.040	.34	4.27	2,500	C-2F
1829	28.0	.070	1.00	12.57	1,000	C-2F
757	28.0	.080	.62	7.79	15,000	C-2F
1820	28.0	.100	1.60	20.11	1,000	C-2F
1864	28.0	.170	3.00	37.71	1,500	C-2F
313	28.0	.170	3.50	44.00	500	C-2F
1873	28.0	.200	3.00	37.71	7,000	C-2F
1822	36.0	.100	2.10	26.40	1,000	C-2F
1828	37.5	.050	.65	8.17	3,000	C-2F
1835	55.0	.050	1.10	13.83	5,000	C-2F
RB22	130.0	.027	.600	7.54	5,000	C-5

*FLASHER TYPE LAMP

METRIC		DIMENSIONS ARE IN MILLIMETERS		TITLE	
	THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	1 PL +/- .02 2 PL +/- .020 ANGLE +/- .0	JKL COMPONENTS CORPORATION	
DRAWN BY	L. WENGSTROM	APPRVD BY	DATE	SIZE	SCALE
		L.R.	7/5/11	A	NONE
- CAD DRAWING -		FORM NO.	DRAWING NO.	RELEASED DATE	
MANUAL REVISIONS NOT PERMITTED		55335	BAYONET SINGLE CONTACT BAYONET	3/2/01	7/5/11
		SCALE	REV. NO.	DATE	SHEET NO.
		NONE	C		1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps category](#):

Click to view products by [JKL manufacturer](#):

Other Similar products are found below :

[5AB](#) [6180](#) [8111](#) [8623](#) [912](#) [120PS](#) [1224](#) [DE603](#) [DW50](#) [IFL-LX2162-16T](#) [C9A](#) [C9A](#) [3015](#) [303](#) [19](#) [PR13](#) [268](#) [GT-NE6H1225T](#)
[CM5004WW](#) [32-2211T](#) [323](#) [509K](#) [5314N1](#) [5314N2](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [10C7DC-120V](#) [1141](#) [MS25231-313](#) [E73](#) [CM2](#)
[7683EBP](#) [8553](#) [XE135B](#) [WWT2-EW34BLA](#) [6S6/30V](#) [7367](#) [1301910036](#) [7A1H](#) [8630FBBB](#) [85](#) [106](#) [105](#) [BGF717-UV1](#) [1974D](#) [1495](#) [373](#)
[400](#) [502](#)