


# 6 LED FESTOON LAMP

## FEATURES

- Non-Polarized
- 12V and 24V AC and DC Operation
- High Efficacy - 90 Lm/Watt Cool White
- 86 Lm/Watt Neutral White
- 80 Lm/Watt Warm White
- Standard Size - Fits JKL Socket #2910F-47

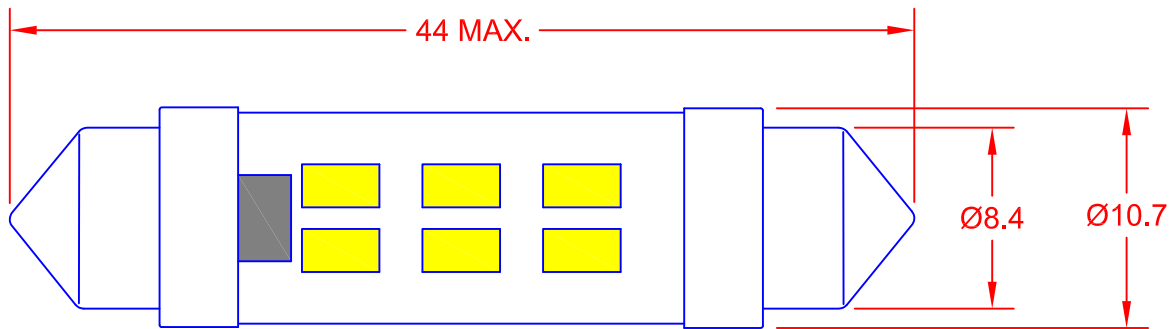

JKL PART NUMBER	Color	Input Voltage (V AC/DC)			Power Typ. (W)	Current Typ. (mA)	Radiance Angle (Deg.)	CCT(K)	Lumen Flux (lm)	Operating Temp. (deg. C)		
		Min.	Typ.	Max.						Min.	Typ.	Max.
LE-0909-14CW	Cool White	--	12	24	0.5	45	120	6000	45	-20	25	40
LE-0909-14NW	Neutral White	--	12	24	0.5	45	120	4500	43	-20	25	40
LE-0909-14WW	Warm White	--	12	24	0.5	45	120	3000	40	-20	25	40

<b>METRIC</b>  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.5 2 PL +/- 0 ANGLE +/- 0		<b>JKL COMPONENTS CORPORATION</b>					
				TITLE <b>6 LED FESTOON LAMP</b>					
DRAWN BY L. WENGSTROM		APP'VD BY DATE L.R. 11/11/13		SIZE <b>A</b>	FSCM NO. <b>55335</b>	DRAWING NO. <b>LE-0909-14</b>			
REV. NO. A CHANGE MOL TO 44 MAX. RELEASED 6/20/11		APP'VD DATE 6/20/11		SCALE NONE		RELEASED DATE 6/20/11	REVISION DATE 11/11/13	REV. NO. <b>A</b>	SHEET 1 OF 1
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED									

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Replacement Lamps - Based LEDs](#) category:*

*Click to view products by [JKL](#) manufacturer:*

Other Similar products are found below :

[LAPD-1A](#) [LAPD-1R](#) [LAPD-2R](#) [LAPD-6W](#) [LSTD-M4S](#) [SSP-1156B153S12](#) [SSP-1157B156U12](#) [SSP-LXS110818BA](#) [560-0101F](#) [560-0103F](#)  
[LAPD-1W](#) [LAPD-6R](#) [560-0104F](#) [585-1113](#) [SSP-LXC1283S24](#) [SSP-3MB96U12G](#) [SLL-05EY](#) [1.90.690.684/0000](#) [560-0203F](#) [586-2206-](#)  
[205F](#) [SSP-LXS1826U16A](#) [LATD-2JW](#) [24LS4-G1](#) [24LS4-R1](#) [MF200-NFW5H](#) [MB403-W60-CW-BP](#) [387LP-A](#) [1819LS2-G-CG](#) [387LP-R](#)  
[387LP-B](#) [387LP-W](#) [387LP-G](#) [6S6LS155-CWR](#) [130MBLS-G-CG](#) [5000404LAMP](#) [E10SB12A](#) [E10SB130A](#) [E10SB24A](#) [E10SG12A](#)  
[E10SG130A](#) [E10SG24A](#) [E10SR12A](#) [E10SR130A](#) [E10SR24A](#) [E10SW12A](#) [E10SY12A](#) [E10SY130A](#) [585-1425F](#) [521-9208F](#) [586-0012-806F](#)