


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED & CANCEL PL-0907-01	7/14/09
A	OUTPUT MAX CURRENT 2 Amps	8/5/09

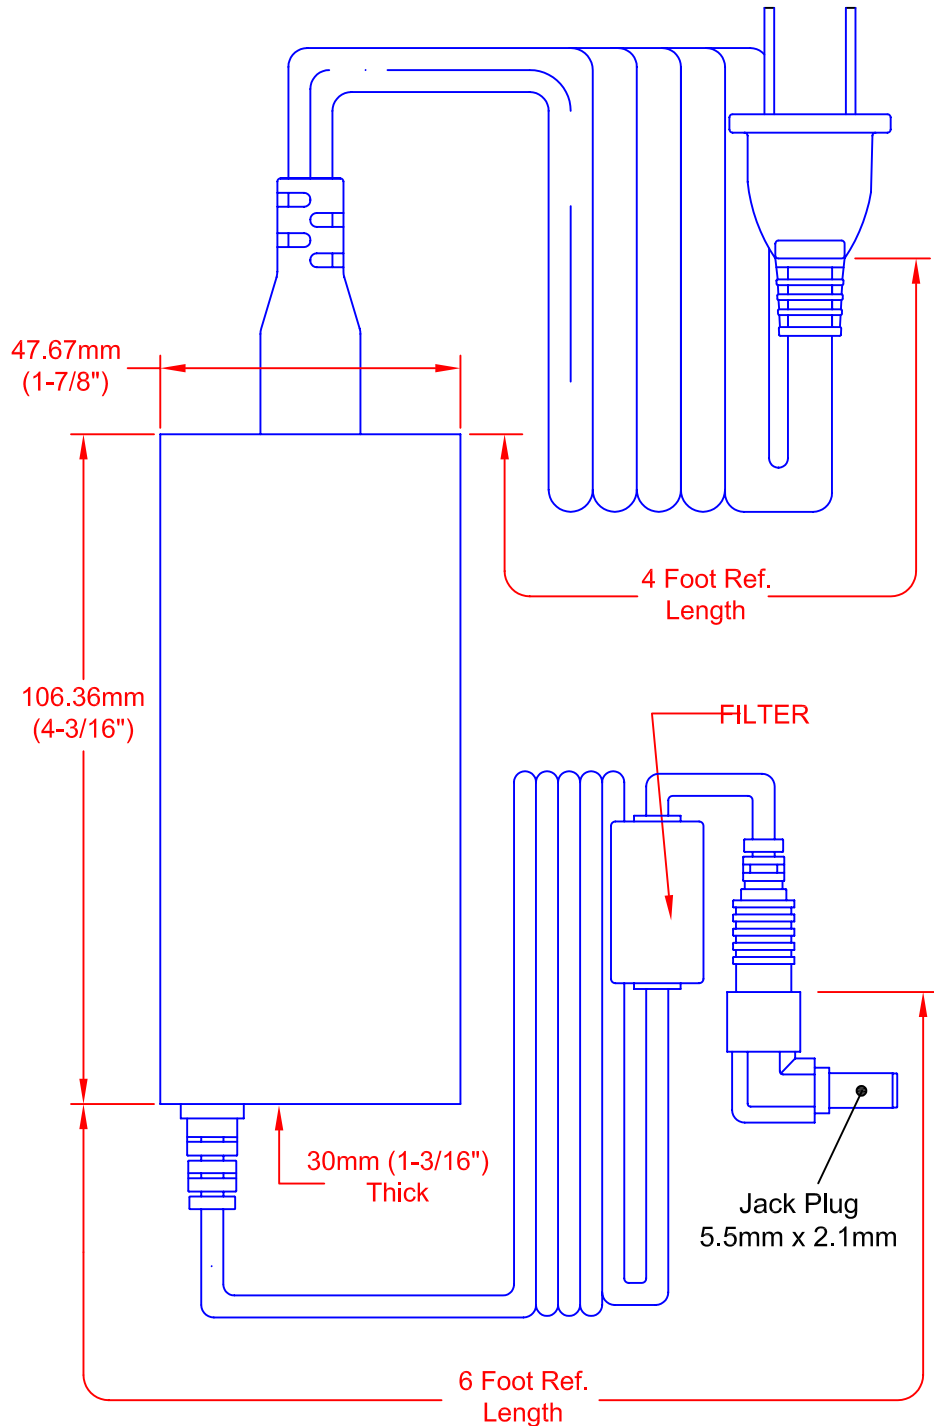

Input

Rated Input Voltage	100 V ~ 240 V ac
Input Voltage Range	90 V ~ 264 V ac
Rated Frequency	50 ~ 60 Hz
Frequency Range	47 ~ 63 Hz
Rated Input Current	1.6A RMS max @ 115 V ac 0.8A RMS max @ 230 V ac

Output

Output Voltage	24.0 V
Output Max. Current	2 Amps
Line Regulation	± 2%
Load Regulation	± 5%
Ripple Voltage	250m Vp-p max
Efficiency	80% min

Safety and EMI

HI-POT	Input to output 3000 V ac at 10 mA for 1 minute
Insulation Resistance	50 Mohm at 500 V dc
Safety Approvals	UL/C-UL(60950-1), TUV-GS(EN60950-1), SAA(AS/N2S60950), T-License (EN60950-1), CCC(GB4943)
EMI Standard	FCC, CISPR-22 (EN55022), CLASS B, C-TICK, CE, GB9254.GB17625.1
RoHS Compliant	Yes
Leakage Current	0.25 mA

Environmental

Storage Temperature	-20° C ~ +60° C
Operating Temperature	0° C ~ +40° C
Storage Humidity	5 ~ 95% RH Non-condensing
Operating Humidity	20 ~ 85% RH Non-condensing

JKL PART NO.: ZPS-20

 THIRD ANGLE PROJECTION	DIMENSIONS ARE IN mm & (INCHES) TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/- 0		JKL COMPONENTS CORPORATION			
			TITLE 24V SWITCHING POWER ADAPTER			
DRAWN BY L. WENGSTROM	APPV'D BY L.R.	DATE 8/5/09	SIZE A	FSCM NO. 55335	DRAWING NO. ZPS-20	
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 7/14/09	REVISION DATE 8/5/09	REV. NO. A SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [JKL](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [EUK-150S105DV](#) [LN1224CV](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [PWM-40-36](#) [PWM-60-36](#) [LUD-060S150BSF](#) [ESS010W-0750-12](#)