
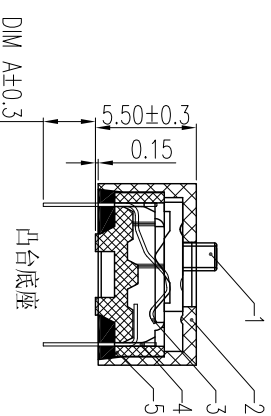

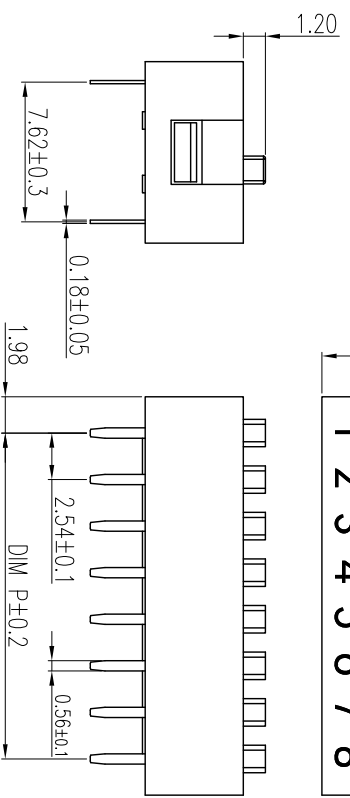
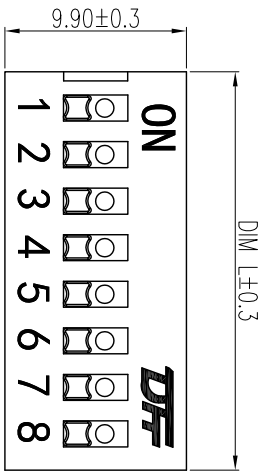




REV	ECN	CONTENT	CHECK	DATE
V0.0		初版发行	YZG	2016.09.15
V1.0		整理图纸	LJ	2019.09.21
V2.0		整理图纸	WL	2020.06.03

DIM A/B	长针	短针
凸台底座	3.65	2.85
平台底座	3.80	3.00

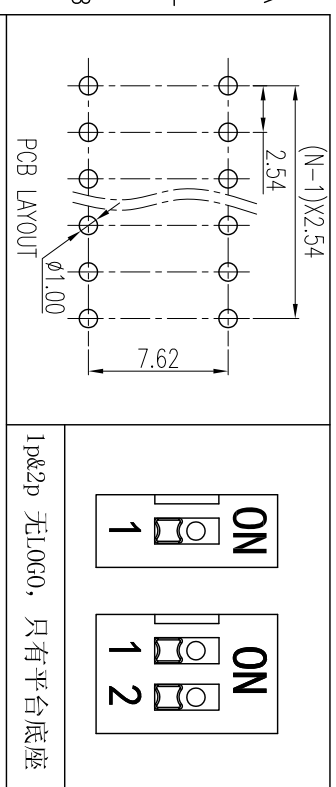

- 技术要求:
- 额定电流: 25mA, 24VDC (开与关切换时) 100mA, 50VDC (开与关不切换时)
  - 接触阻抗:  $\leq 50m\Omega$  (初始),  $\leq 100m\Omega$  (寿命测试后)
  - 绝缘电阻:  $\geq 100M\Omega/500VDC$
  - 耐电压: 500VAC/1minute
  - 拨动力: 1000g max
  - 拨动行程: 2.0mm
  - 机械寿命:  $\geq 2000$  cycles
  - 使用温度:  $-40^{\circ}C \sim +85^{\circ}C$
  - 存储温度:  $-40^{\circ}C \sim +85^{\circ}C$
  - 符合RoHS要求

焊接说明:  
 手工焊接: 30W电烙铁, 320±5°C, 3S max  
 波峰焊接: 250±10°C, 5S max  
 焊接前保持开关在“OFF”状态

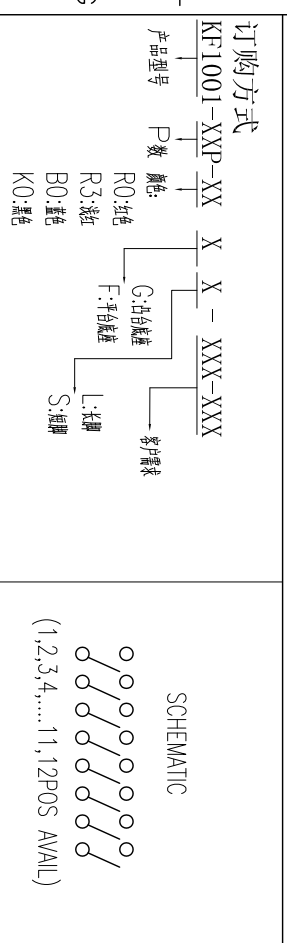

POLES	DIM P	DIM L	底座	零件名称	零件编码	数量	材料	备注
1	/	3.96	底座			1	工程塑料	UI94V-0
2	2.54	6.50	PIN2	/		P	铜合金	镀金
3	5.08	9.04	PIN1	/		P	铜合金	镀金
4	7.62	11.58						
5	10.16	14.12						
6	12.70	16.66						
7	15.24	19.20						
8	17.78	21.74						
9	20.32	24.28						
10	22.86	26.82						
11	25.40	29.36						
12	27.94	31.90						

APP.	DATE	2020.6.3	NAME	KF1001-XXP-XXXX-DFP-XXX
CHK.	DATE	2020.6.3 <td>DWGNO.</td> <td>W20000011</td>	DWGNO.	W20000011
DWG.	DATE	2020.6.3 <td>SHEET <td>1/1</td> </td>	SHEET <td>1/1</td>	1/1
UNITS	MM	SCALE	1:1 <td>PROJECTION-METHOD</td>	PROJECTION-METHOD

订购方式: KF1001-XXP-XX X X-XXX-XXX

产品型号: P 数 规格: R0:绝缘, R3:液阻, B0:蓝, K0:黑

General tolerance in mm: over 0 to ±0.15, over 3 to ±0.2, over 6 to ±0.25, over 30 to ±0.3, over 120 to ±0.5, over 400 to ±0.8, radii and chamfers: over 0.5 to ±0.2, over 3 to ±0.5, over 6 to ±1.0, shorter angle side: over 10 to ±30', over 50 to ±20', over 100 to 0.5, over 150 to 0.2, over 100 to 0.3, over 150 to 0.5

DFP 慈溪市凯峰电子有限公司 CIXI KAIFENG ELECTRONICS CO., LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [KAIFENG](#) manufacturer:*

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [H7CZL8AC100240](#) [DRR60016](#) [DRS4016](#) [1825444-1](#) [200183](#) [206002](#) [219-6LPSTRF](#)  
[25.350.0653.0](#) [SBS 5004 TG](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [192960010](#) [206005RAS](#) [206007](#) [2-](#)  
[1825058-8](#) [25.330.0653.1](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DSR02T](#) [DSS 208 N](#)  
[E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-9MSTP](#) [EPM02FV](#) [206010RAST](#) [NDS08V](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#)  
[1825428-4](#) [219-10LPSTF](#) [E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [EPG301BT06](#) [219-7LPSTRF](#) [1-1825058-6](#) [E3TSL23M5J03M](#) [Y5795](#)  
[7R0060](#)