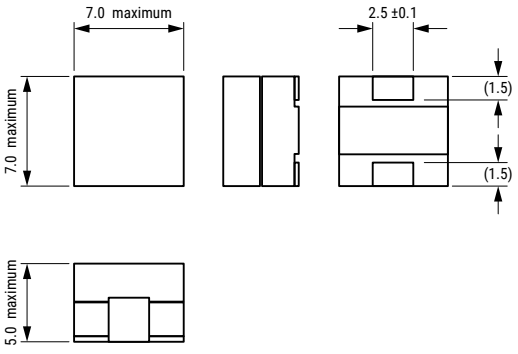

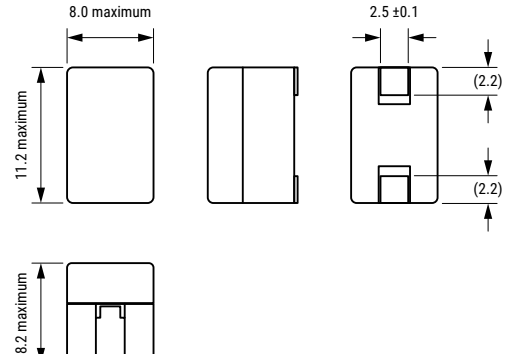















SMD Ferrite Inductor Engineering Kit

Sample Kit Contents

KEMET Part Number	Inductance	Inductance Tolerance	Current	DC Resistance	Thickness	Quantity	Description
TPI077050L105N	105nH	20%	60A	0.32 mOhms	5mm	10	TPI SMD 105nH 20% -40/+125C
TPI111065L210N	210nH	10%	54A	0.29 mOhms	6.5mm	10	TPI SMD 210nH 10% -40/+125C
TPI118082L150N	150nH	10%	93A	0.29 mOhms	8.2mm	10	TPI SMD 150nH 10% -40/+125C
TPI118082L180N	180nH	10%	79A	0.29 mOhms	8.2mm	10	TPI SMD 180nH 10% -40/+125C
TPI128080L180N	180nH	10%	78A	0.29 mOhms	8mm	10	TPI SMD 180nH 10% -40/+125C
TPI128080L210N	210nH	10%	70A	0.29 mOhms	8mm	10	TPI SMD 210nH 10% -40/+125C
TPI128080L230N	230nH	10%	64A	0.29 mOhms	8mm	10	TPI SMD 230nH 10% -40/+125C

Dimensions – Millimeters

Case Size	Dimensions (mm)			Case Size	Dimensions (mm)		
TPI077050				TPI111065			
							
TPI118082				TPI128080			
							

Size Code	W		F		E1		P1	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
TPI077050	16	±0.30	7.5	±0.10	1.75	±0.10	12	±0.10
TPI118082	24	±0.30	11.5	±0.10	1.75	±0.10	16	±0.10
TPI111065	24	±0.30	11.5	±0.10	1.75	±0.10	16	±0.10
TPI128080	24	±0.30	11.5	±0.10	1.75	±0.10	16	±0.10

Size Code	P2		P0		D0		T	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
TPI077050	2	±0.10	4	±0.10	1.55	±0.05	0.4	±0.05
TPI118082	2	±0.10	4	±0.10	1.55	±0.05	0.4	±0.05
TPI111065	2	±0.10	4	±0.10	1.55	±0.05	0.4	±0.05
TPI128080	2	±0.10	4	±0.10	1.55	±0.05	0.4	±0.05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Inductor Kits & Accessories](#) category:

Click to view products by [Kemet](#) manufacturer:

Other Similar products are found below :

[B82498X001](#) [EKDMGN08A-KIT](#) [EKDMGN011-KIT](#) [HCTI-HCTC-KIT](#) [EKDMAT02-KIT](#) [DK0051](#) [EKDMAT04-KIT](#) [HCTC-KIT](#) [744779](#)
[CP-P36/22-2S](#) [CPV-RM12/I-1S-12PD-TZ](#) [744062](#) [TSTH-MM](#) [TSTH-MS](#) [TTH 50-150](#) [31743](#) [WE-1413H](#) [WE-1952V](#) [WE-237](#) [WE-2750H](#)
[WE-279](#) [WE-2886H](#) [WE-3671H](#) [WE-3683H](#) [WE-3686](#) [WE-3693](#) [WE-3701H](#) [WE-3759](#) [CPHS-EFD20/7-1S-10P](#) [E30-K-H-12P-SS-P3002](#)
[E65-54-K-H](#) [EE13-K-H-8P-SW](#) [EE13-K-V-10P-SW](#) [EE25_10_6-K-V-10P-YW-360](#) [EF12.6-K-H-9P-P1212](#) [EF16-K-H-8P](#) [EF16-K-H-9P-SW](#)
[EF20-K-H-8P](#) [EF20-K-H-8P-SW](#) [EFD12_3.5-K-1S-8P-CPHS](#) [EFD15-K-10P-4S](#) [EFD25-K-10P-WZ7855](#) [FIRCHK](#) [CLI-EFD25](#) [TSTH-MD](#)
[WE-3657H](#) [WE-3621H](#) [WE-3292V](#) [WE-2901H](#) [WE-2752V](#)