



Sample Kit Contents

KEMET Part Number	Capacitance Value (µF)	Dimensions in mm			Lead Spacing (p)	dV/dt (V/µs)	Quantity
		B	H	L			
P295BE471M500A	0.00047	5.5	12.5	18.0	15	2000	10
P295BE681M500A	0.00068	5.5	12.5	18.0	15	2000	10
P295BE102M500A	0.001	5.5	12.5	18.0	15	2000	10
P295BJ152M500A	0.0015	6.5	12.5	18.0	15	2000	10
P295BJ182M500A	0.0018	6.5	12.5	18.0	15	2000	10
P295BJ222M500A	0.0022	6.5	12.5	18.0	15	2000	10
P295BL252M500A	0.0025	7.5	14.5	18.0	15	2000	10
P295BL272M500A	0.0027	7.5	14.5	18.0	15	2000	10
P295BL332M500A	0.0033	7.5	14.5	18.0	15	2000	10
P295BQ392M500A	0.0039	8.5	16.0	18.0	15	2000	10
P295BQ472M500A	0.0047	8.5	16.0	18.0	15	2000	10

Dimensions – Millimeters

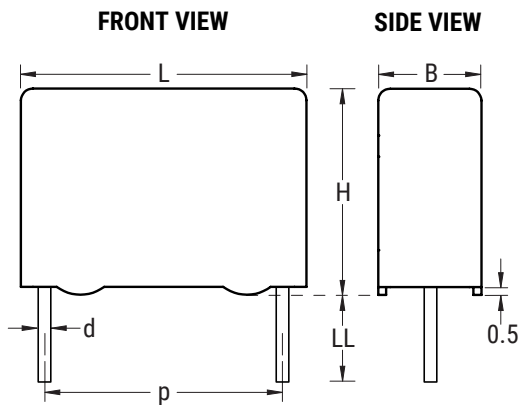

www.kemet.com/P295

Size Code	p		B		H		L		d	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
BE	15.0	+/-0.4	5.5	Maximum	12.5	Maximum	18.0	Maximum	0.8	+/-0.05
BJ	15.0	+/-0.4	6.5	Maximum	12.5	Maximum	18.0	Maximum	0.8	+/-0.05
BL	15.0	+/-0.4	7.5	Maximum	14.5	Maximum	18.0	Maximum	0.8	+/-0.05
BQ	15.0	+/-0.4	8.5	Maximum	16.0	Maximum	18.0	Maximum	0.8	+/-0.05

Note: See Ordering Options Table for lead length (LL) options.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Capacitor Kits](#) category:

Click to view products by [Kemet](#) manufacturer:

Other Similar products are found below :

[1320838-1](#) [DK0035T](#) [KITMS11111](#) [DK0026T](#) [DK0033T](#) [TS0002](#) [ALU ENG KIT 07](#) [GRM03-KIT-CLASS2-DE](#) [MKV250V-KIT-1-DE](#)
[MKV250V-KIT-2-DE](#) [744114](#) [GCJ-KIT-X7-DE-A](#) [GJM022-KIT-TTOL-DE](#) [GRM02-KIT-DE](#) [ACCU-P0402KITL1](#) [KITTYPE2100 LF](#)
[KITMS08051](#) [AY21-KIT-HF](#) [SS016M0047B1F-0407](#) [PPR ENG KIT 04](#) [ALU ENG KIT 02](#) [TAN ENG KIT 34](#) [CER ENG KIT 37](#) [CER ENG](#)
[KIT 36](#) [ALU ENG KIT 01](#) [VY2-KIT-MS](#) [ACCU-P0402KITL2](#) [TS0003](#) [ACCU-P0201KITL2](#) [FPCAP-SMD-KIT](#) [885070](#) [ALU ENG KIT 03](#)
[ALU ENG KIT 05](#) [ALU ENG KIT 06](#) [DK0008T](#) [DK0015](#) [DK0036T](#) [DK0037T](#) [DK0081T](#) [DK0060T](#) [ESRD-KIT9](#) [MCF1000VKIT6](#) [MICA-](#)
[KIT1](#) [MICA-KIT6](#) [MIN300VKIT1](#) [HOTC-KIT-KH](#) [iKIT60MM2V7A2S](#) [S-0402](#) [S-0603](#) [S-0805](#)