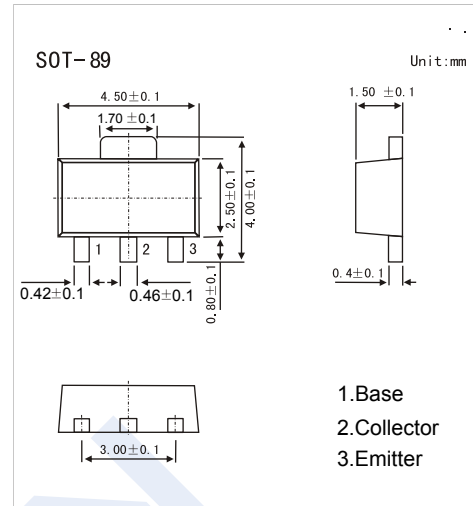


NPN Transistors

2SC4672

■ Features

- Low saturation voltage, typically $V_{CE(sat)} = 0.1V$ at $I_C/I_B = 1A/50mA$.
- Excellent DC current gain characteristics.

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	60	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	V_{EBO}	6	V
Collector current	I_C	3	A
	I_C (Pulse) *1	6	A
Collector power dissipation	P_C	0.5	W
	P_C *2	2	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$

*1. Single pulse, $P_w = 10ms$

*2. $40 \times 40 \times 0.7mm$ Ceramic board

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C = 50\mu A$	60			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C = 1mA$	50			V
Emitter-base breakdown voltage	V_{EBO}	$I_E = 50\mu A$	6			V
Collector cutoff current	I_{CBO}	$V_{CB} = 60V$			0.1	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = 5V$			0.1	μA
DC current gain	h_{FE}	$V_{CE} = 2V, I_C = 0.5A$	82		390	
		$V_{CE} = 2V, I_C = 1.5A$	45			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 1A, I_B = 50mA$		0.13	0.35	V
Output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0A, f = 1MHz$		25		pF
Transition frequency	f_T	$V_{CE} = 2V, I_E = -0.5A, f = 100MHz$		210		MHz

■ h_{FE} Classification(1)

Markink	DK*		
Rank	P	Q	R
h_{FE}	82~180	120~270	180~390

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [KEXIN manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)