
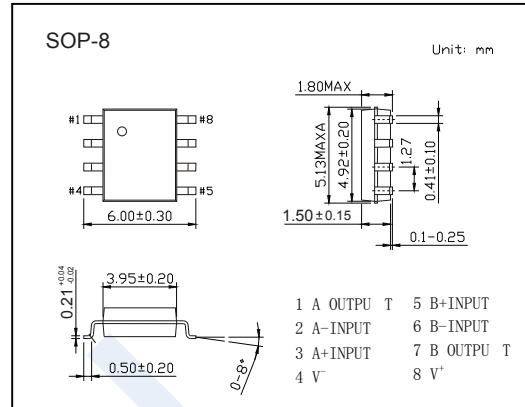


Dual Operational Amplifier NJM4558 (KJM4558)

■ Features

- High Voltage Gain :100dB typ.
- High Input Resistance: 5MΩ typ.
- Bipolar Technology




■ Absolute Maximum Ratings Ta = 25 C

Parameter	Symbol	Rating	Unit
Supply Voltage	V+/V-	±18	V
Differential Input Voltage	V _{ID}	±30	V
Input Voltage	V _{IC}	±15 *	V
Power Dissipation	P _D	300	mW
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

* For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

■ Equivalent Circuit

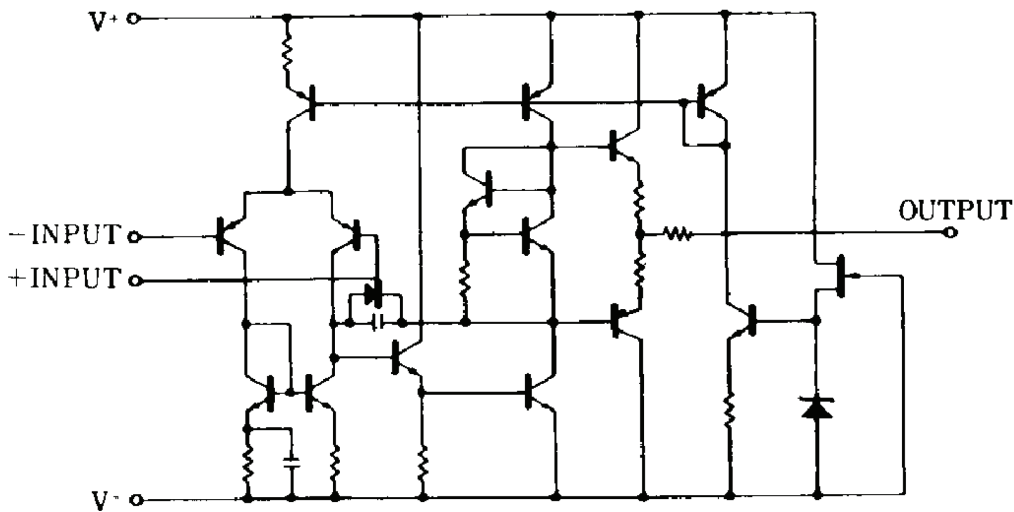

NJM4558 (KJM4558)■ Electrical Characteristics $T_a = 25^\circ\text{C}$, $V^+V^- = \pm 15\text{V}$

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Input Offset Voltage	V_{IO}	$R_s \leq 10\text{K}\Omega$		0.5	6	mV
Input Offset Current	I_{IO}			5	200	nA
Input Bias Current	I_B			50	500	nA
Input Resistance	R_{IN}		0.3	5		$\text{M}\Omega$
Large Signal Voltage Gain	A_v	$R_L \geq 2\text{K}\Omega$, $V_o = \pm 10\text{V}$	86	100		dB
Maximum Output Voltage Swing 1	V_{OM1}	$R_L \geq 10\text{K}\Omega$	± 12	± 14		v
Maximum Output Voltage Swing 2	V_{OM2}	$R_L \geq 2\text{K}\Omega$	± 10	± 13		v
Input Common Mode Voltage Range	V_{ICM}		± 12	14		v
Common Mode Rejection Ratio	CMR	$R_s \leq 10\text{K}\Omega$	70	90		dB
Supply Voltage Rejection Ratio	SVR	$R_s \leq 10\text{K}\Omega$	76.5	90		dB
Operating Current	I_{CC}			3.5	5.7	mA
Slew Rate	SR			1		V/ μs
Equivalent Input Noise Voltage	V_{NI}	RIAA, $R_s = 1\text{K}\Omega$, 30kHz		1.4		μV_{rms}
Gain Bandwidth Product	GB			3		MHz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Operational Amplifiers - Op Amps](#) category:

Click to view products by [KEXIN](#) manufacturer:

Other Similar products are found below :

[OPA2991IDSGR](#) [OPA607IDCKT](#) [007614D](#) [633773R](#) [635798C](#) [635801A](#) [702115D](#) [709228FB](#) [741528D](#) [NCV33072ADR2G](#)
[SC2902DTBR2G](#) [SC2903DR2G](#) [SC2903VDR2G](#) [LM258AYDT](#) [LM358SNG](#) [430227FB](#) [430228DB](#) [460932C](#) [AZV831KTR-G1](#) [409256CB](#)
[430232AB](#) [LM2904DR2GH](#) [LM358YDT](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [070530X](#) [SC224DR2G](#) [SC239DR2G](#) [SC2902DG](#)
[SCYA5230DR2G](#) [714228XB](#) [714846BB](#) [873836HB](#) [MIC918YC5-TR](#) [TS912BIYDT](#) [NCS2004MUTAG](#) [NCV33202DMR2G](#)
[M38510/13101BPA](#) [NTE925](#) [SC2904DR2G](#) [SC358DR2G](#) [LM358EDR2G](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#)
[NJM358CG-TE2](#) [HA1630S01LPEL-E](#) [LM324AWPT](#) [HA1630Q06TELL-E](#)