



Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

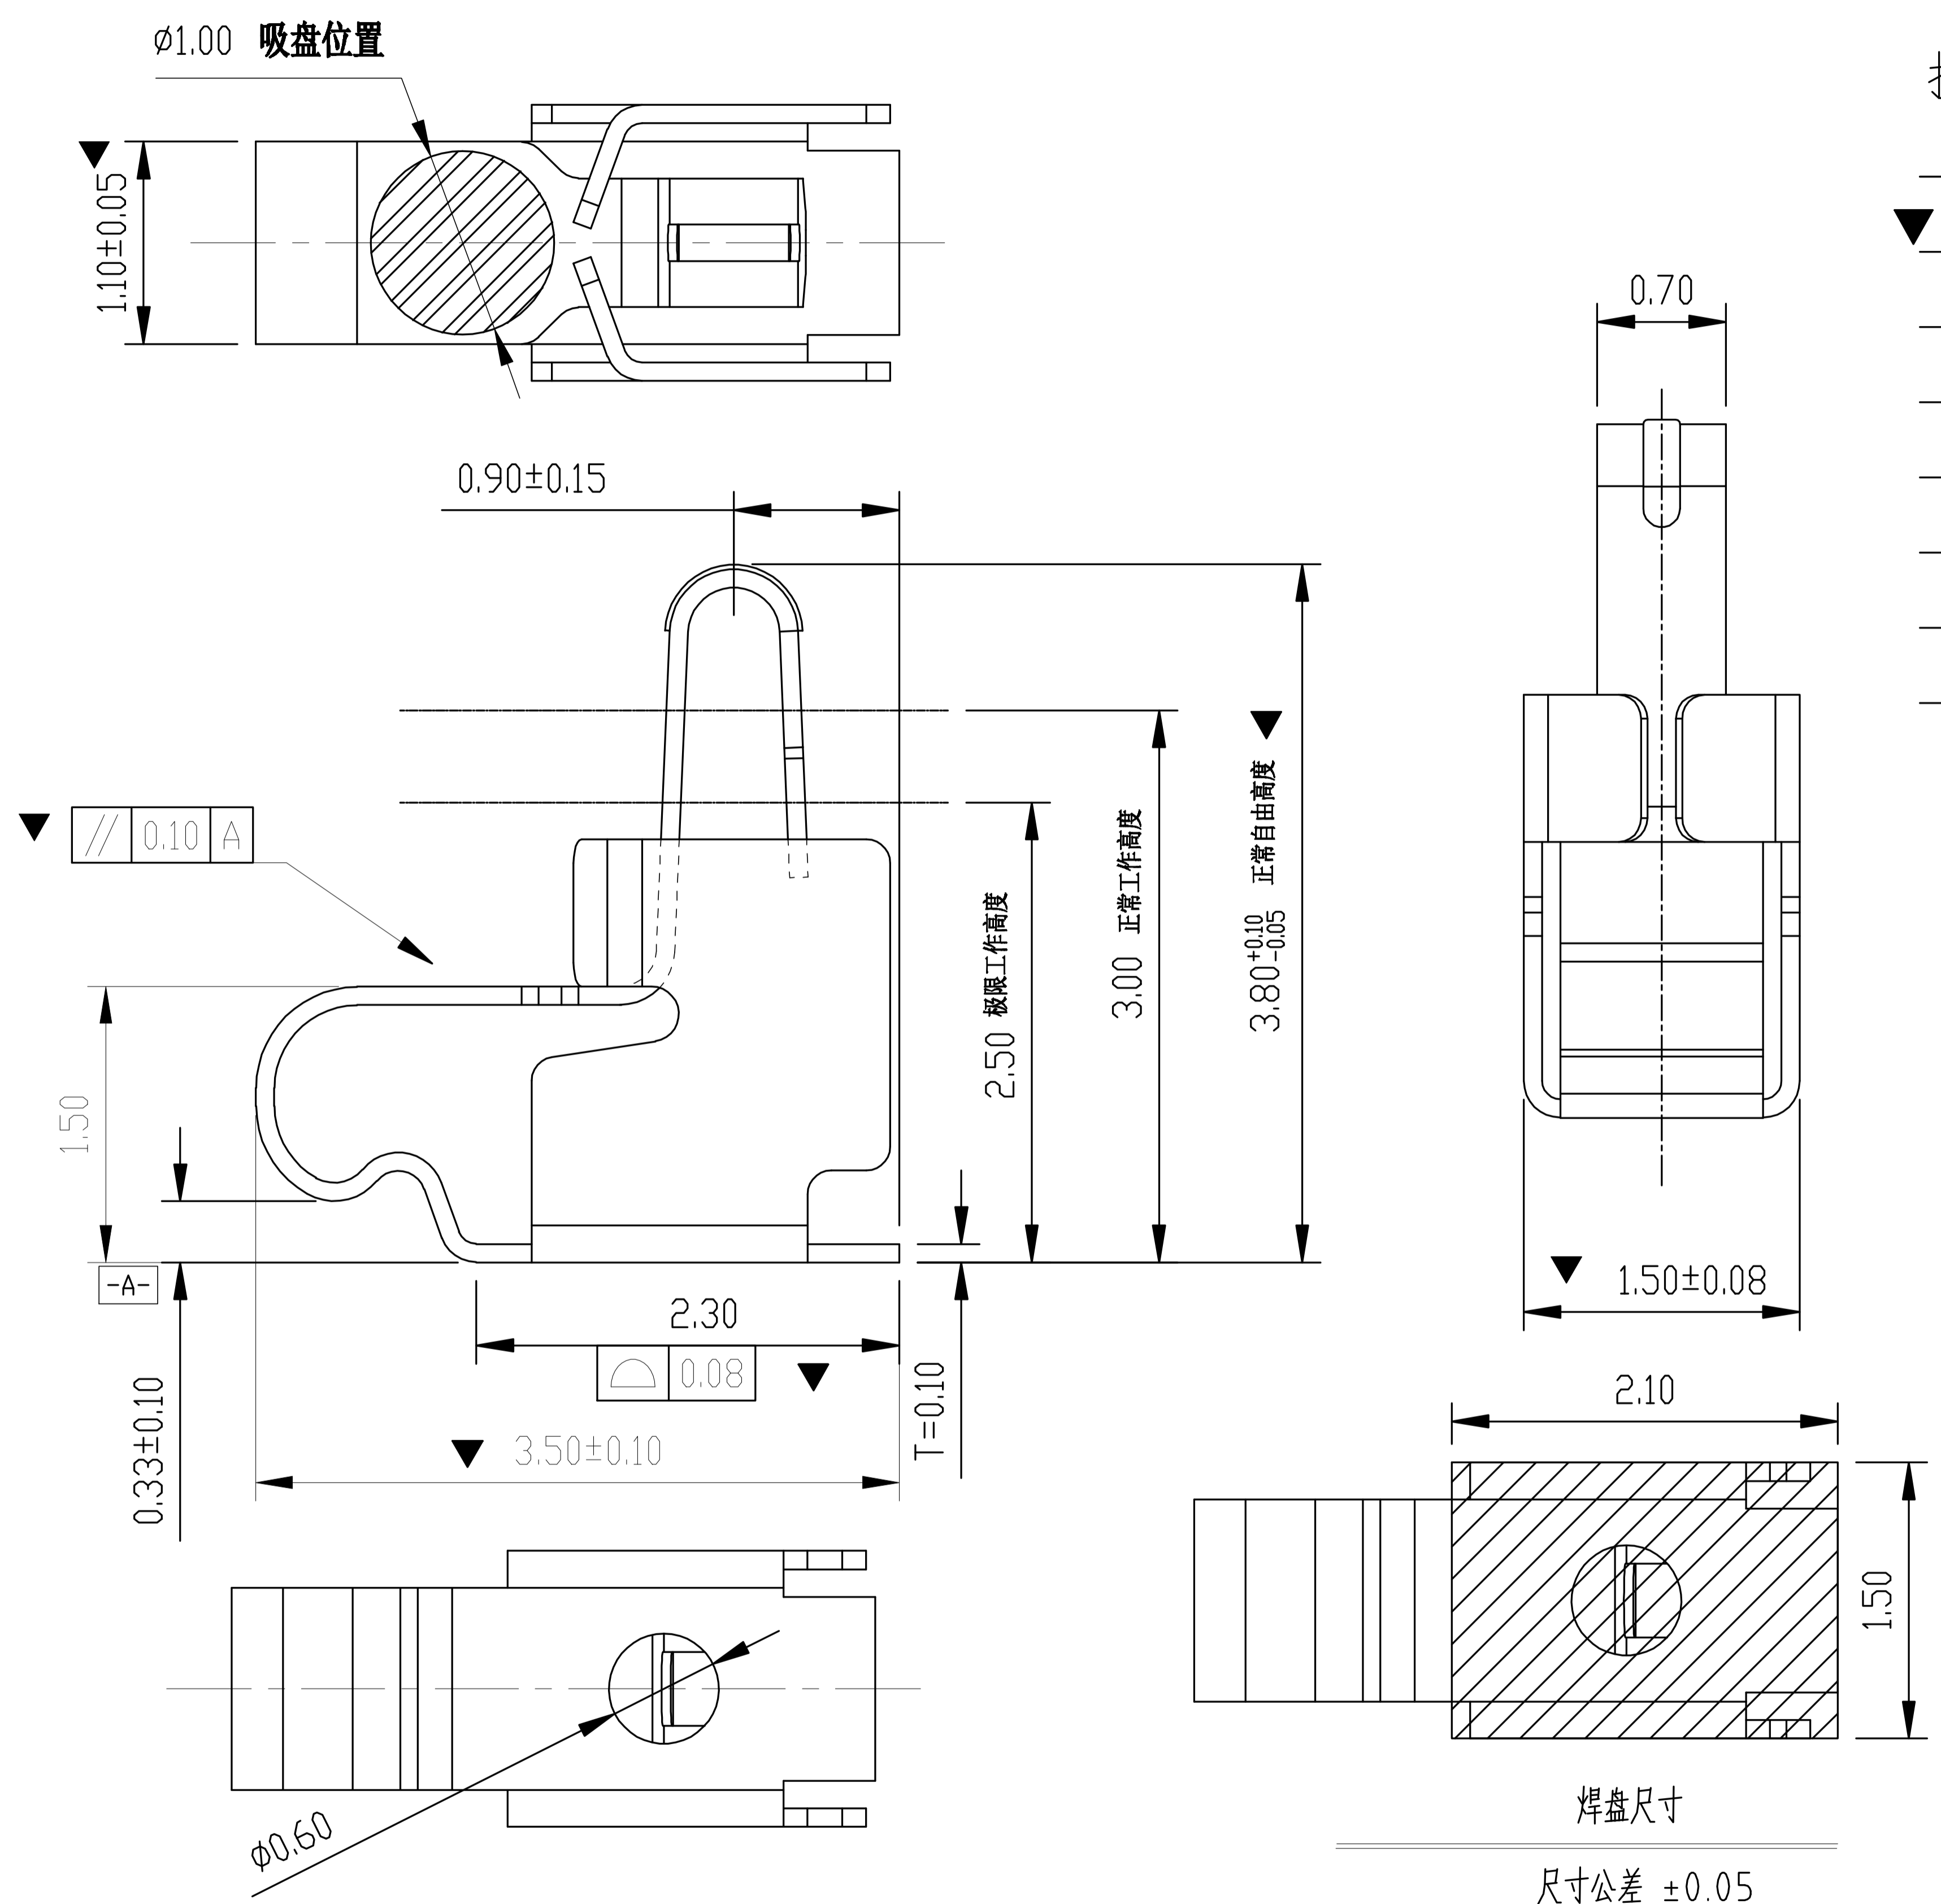

- 技术要求:
1. 材质: 不锈钢 SUS304, $T = 0.10 \pm 0.005$;
 2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大 0.03mm ;
 3. 扭曲: $45^\circ / 1000\text{mm}$, 拱形 $5\text{mm} / 1000\text{mm}$;
 4. 标示有 "▼" 符号的为重点控制和检验尺寸;
 5. 未标注之 R MAX R0.13;
 6. 电镀须满足 48 小时盐雾测试;
 7. 寿命测试 > 2 万次, 产品弹力要求在 $60\text{gf} \sim 80\text{gf}$ 之间;
 8. 镍底 $50 \sim 80\text{u"min}$, 焊接区域镀金, 接触区域镀金 3U"MIN

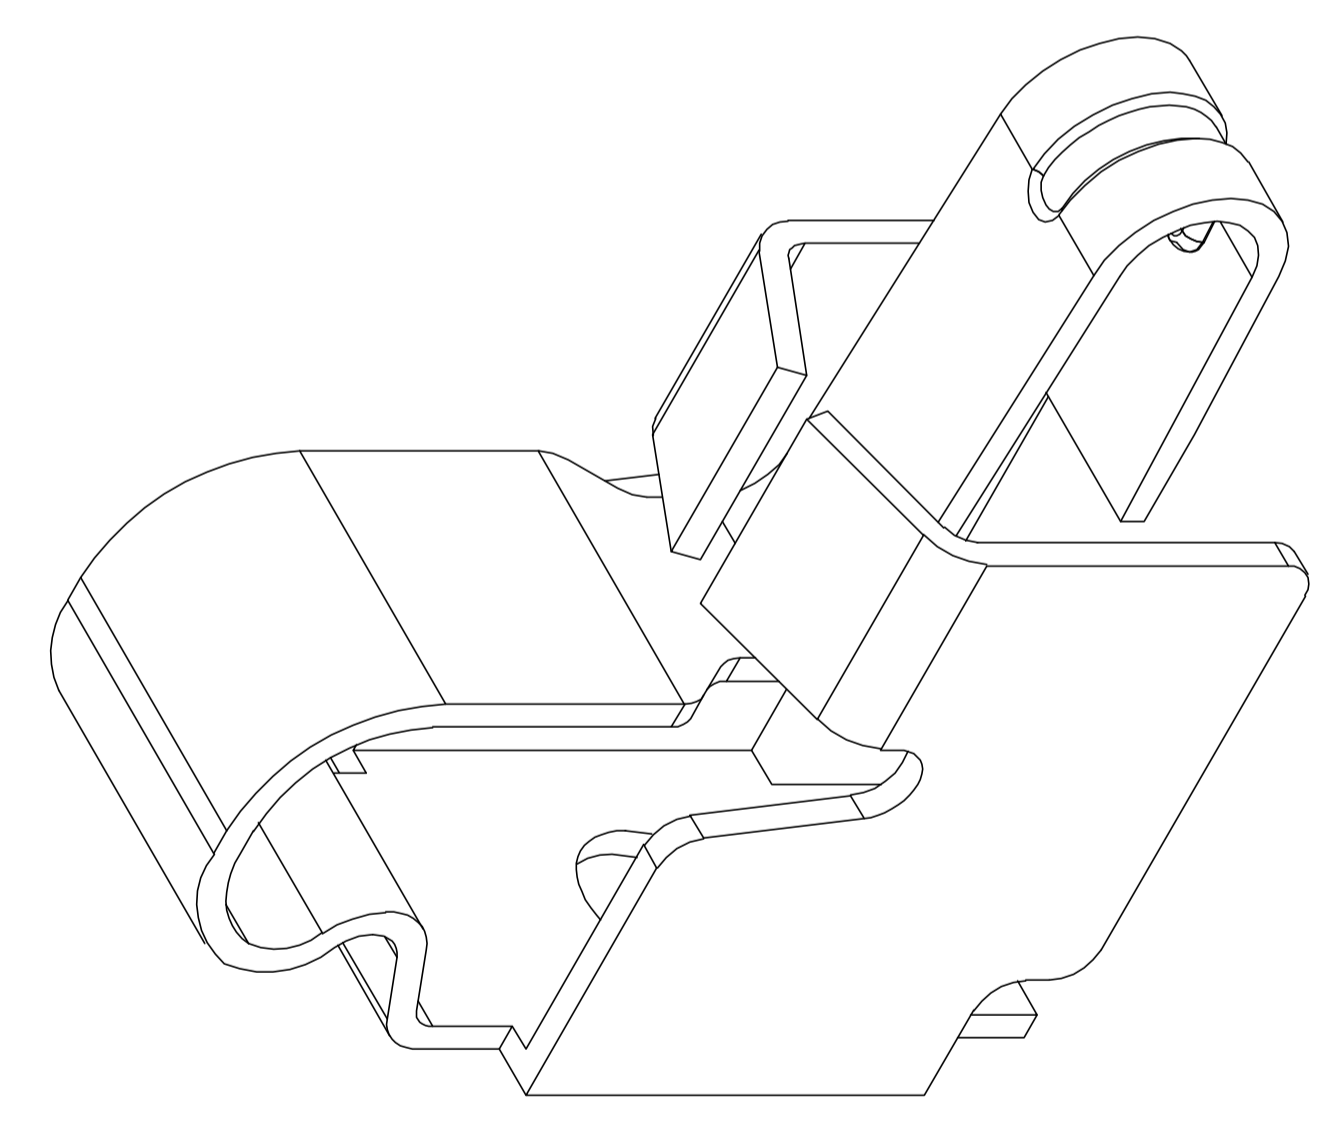

深圳市金航标电子有限公司
 WWW.BDS666.COM
 型号: KH-351538-TP
 0755-83044319

GENERAL TOLERANCE	
XX. ± 0.50	$X^\circ \pm 2.0^\circ$
X. ± 0.35	$.X^\circ \pm 1.0^\circ$
.X ± 0.25	$.XX^\circ \pm 0.5^\circ$
.XX ± 0.15	

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	DATE
CHECK	DATE
APPROVE	DATE

DWG. NO.	681-0019B-1
PARTS NO.(INTENDED USE)	FDX0019B1

TITLE	客户图
	RF Antenna Spring, SMT, L3.5*W1.5*H3.8mm

REV.	A
SHEET	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Board Hardware - PCB category](#):

Click to view products by [Kinghelm manufacturer](#):

Other Similar products are found below :

[8919-0-00-15-00-00-03-0](#) [5970-1-15-01-32-14-04-0](#) [MKU 1 BLACK](#) [MLN 150/1 BLACK](#) [8579-1-15-15-11-27-10-0](#) [PRUEF 1 RED](#) [PRUEF 2 RED](#) [PW1616](#) [MPS 1 BLACK](#) [1548-103](#) [2317-2-00-50-00-00-07-0](#) [2506-2-00-50-00-00-07-0](#) [SCREWCLAMP EASY2](#) [SCREWCLAMPEASY750GEO](#) [9873-0-15-80-02-80-10-0](#) [2104-2-01-80-00-00-07-0](#) [PG-9](#) [2308-4-00-44-00-00-07-0](#) [2314-2-01-50-00-00-07-0](#) [2352-3-01-50-00-00-07-0](#) [2506-3-00-50-00-00-07-0](#) [251-103](#) [3330-1-00-15-00-00-03-0](#) [430-107](#) [TO-100-030](#) [TO-16-030E](#) [TO-203-040E](#) [TO-24-100](#) [TO-64-030](#) [5062-0-00-21-00-00-33-0](#) [5108](#) [325-102](#) [WLPL-141](#) [Z4.102.1680.0](#) [5119](#) [0153-4-15-80-30-27-04-0](#) [0252-0-15-01-32-27-10-0](#) [0253-0-15-15-30-27-10-0](#) [0255-0-15-01-30-27-04-0](#) [0290-0-00-15-00-00-03-0](#) [0309-2-15-80-47-27-10-0](#) [02-41](#) [0405-0-15-80-34-27-04-0](#) [0569-0-15-15-11-27-10-0](#) [0579-0-15-01-11-27-10-0](#) [0489-0-15-01-11-27-04-0](#) [0489-2-15-15-11-27-04-0](#) [0553-1-15-01-11-27-10-0](#) [0554-0-15-15-11-27-10-0](#) [0579-0-15-15-21-14-10-0](#)