

## Product information

# 12 72 190

## KNIPEX NexStrip Multi-Tool for Electricians



- Perfect crimping: fast and even square crimping for individual wire ferrules, the ratchet crimping mechanism guarantees the required crimping pressure
- Precise stripping: automatically adapts to the respective cable diameter and ensures consistent stripping lengths with the adjustable length stop especially with repetitive work
- Multi-component grips ensure non-slip, comfortable handling
- Quick, precise square crimp of single wire ferrules according to DIN 46228 parts 1+4, self-adjusts for sizes 0.25 – 4 mm<sup>2</sup> / 2 x 2.5 mm<sup>2</sup> – allows for quick crimping between different sizes
- Repetitive, high crimping quality due to ratcheting mechanism with a complete crimping cycle
- Stripping with fine adjustment – for optimal adjustment to special materials or temperature conditions for flexible and solid conductors between 0.03 and 10 mm<sup>2</sup> (AWG 32-8)
- Cleanly cuts conductors up to 10 mm<sup>2</sup> (AWG 8)
- High-quality housing made of glass fibre reinforced plastic
- For the electrical trade: for domestic installations and wiring of electronical devices, such as PLC (programmable logic controller)
- Wire stripper with three functions: stripping wire up to 10 mm<sup>2</sup>, crimping capacity of 4 mm<sup>2</sup> or 2 x 2.5 mm<sup>2</sup> and cutting capacity of 10 mm<sup>2</sup>

### General

Article No.	12 72 190
EAN	4003773088165
Handles	with non-slip plastic grips
Weight	170 g
Dimensions	190 x 17 x 110 mm
REACH compliant	contains SVHC
RoHS compliant	not applicable



*technical change and errors excepted*









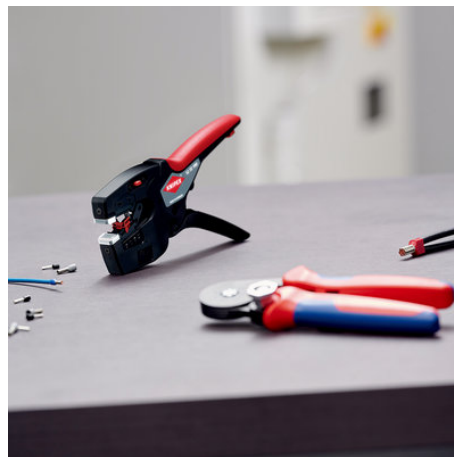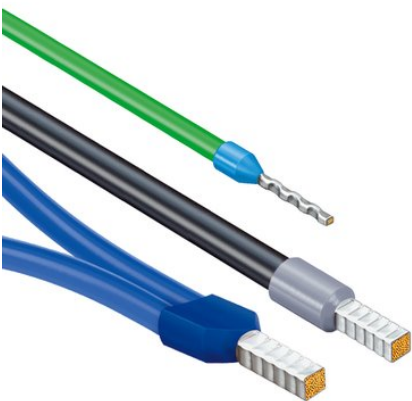

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Stripping & Cutting Tools](#) category:*

*Click to view products by [Knipex](#) manufacturer:*

Other Similar products are found below :

[6-690504-4](#) [693855-1](#) [813066-2](#) [844764-5](#) [844765-5](#) [1-240644-7](#) [1-240642-7](#) [133900-001](#) [1424635-1](#) [1424650-1](#) [1440-0013-84](#) [1-458031-5](#)  
[1-458030-5](#) [1490498-1](#) [1755](#) [2-539783-7](#) [1633578-3](#) [1-844765-9](#) [240825-8](#) [CST596711](#) [458031-9](#) [462839-1](#) [4-690504-2](#) [406339-3](#) [L-4994](#)  
[45-265](#) [453653-1](#) [45-418](#) [455177-1](#) [455671-4](#) [45-637](#) [458144-8](#) [462007-1](#) [462548-1](#) [464661-1](#) [224186-1](#) [809687-1](#) [852080-2](#) [856695-8](#)  
[458030-1](#) [679326-7](#) [605744-1](#) [690784-2](#) [844765-6](#) [T147A](#) [TE3SA](#) [690464-4](#) [63820-0030](#) [378185](#) [568680-1](#)