



P.C.B. LAYOUT

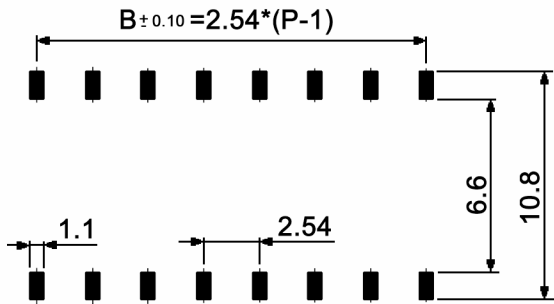

SCHEMATIC (TYP.)



Prod. No.	No. of pos.	A	B
SBS 5001 T	1	2.44	-
SBS 5002 T	2	4.98	2.54
SBS 5003 T	3	7.52	5.08
SBS 5004 T	4	10.06	7.62
SBS 5005 T	5	12.60	10.16
SBS 5006 T	6	15.14	12.70
SBS 5007 T	7	17.68	15.24
SBS 5008 T	8	20.22	17.78
SBS 5009 T	9	22.76	20.32
SBS 5010 T	10	25.30	22.86
SBS 5012 T	12	30.38	27.94


Compliance: RohS II (2011/65/EU)

Tolerances: ±0.20mm			Date	Name	<h1>SBS 5000 T</h1>
			02/05	dr	
Material	10/16	dr	<h2>knitter-switch</h2>		<h1>30 05 67</h1>
Soldering conditions	03/13	dr			
Operating temperature	06/10	dr			
Revised	11/09	dr			
Modifications	Date	Name			Page 1/2

Specifications:

Contact rating: 25mA, 24V DC
Contact resistance: 100mOhm max.
Insulation resistance: 100MOhm min.
Dielectric strength: 500V AC (50Hz or 60Hz) for 1 minute
Operating temperature: -40°C to +85°C
Storage temperature: -40°C to +85°C
Operating force: 1000gf max. (9.8N max.)
Mechanical life: 2 000 cycles of operation
Material: Cover / base: high-temp. thermoplastic PA-9T UL94V-0, molded black, Genestar GN2332, UL-file E90350
 Actuator: thermoplastic LCP UL94V-0, molded white, Sumitomo E6006L, UL-file E54705
Terminal: brass, gold plated
Protective tape: polyimide

Soldering conditions:

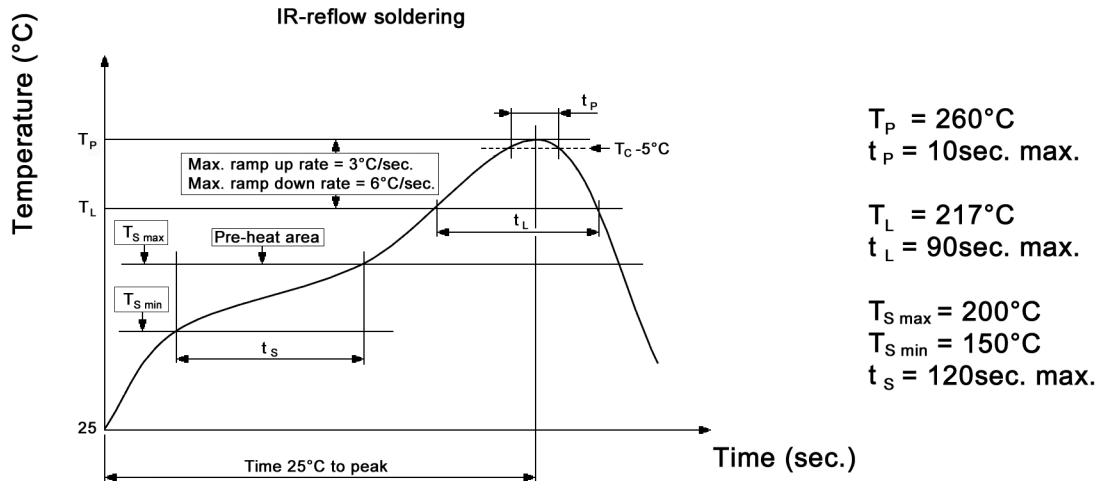

Compliance: RohS II (2011/65/EU)

Tolerances: ±0.20mm	Date	Name	<h1>SBS 5000 T</h1>	
	02/05	dr		
			<h2>30 05 67</h2>	
			knitter-switch	Page
				2/2
Modifications	Date	Name		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[09.400BP.04](#) [106-EM04-EV](#) [106-EM08-EV](#) [106-LP04-EV](#) [106-LPD04-EV](#) [106-SDN06-EV](#) [1-1437507-0](#) [1-1437507-6](#) [1-1571983-1](#) [1-1571983-3](#) [1-1571983-4](#) [1-1571983-5](#) [1-1571998-3](#) [1-1571999-1](#) [1-1571999-6](#) [1-161347-2](#) [1-1825002-0](#) [1-1825002-3](#) [1-1825002-4](#) [1-1825002-7](#) [1-1825002-8](#) [1-1825006-1](#) [1-1825006-3](#) [1-1825006-6](#) [1-1825006-7](#) [1-1825006-9](#) [1-1825007-0](#) [1-1825007-3](#) [1-1825008-0](#) [1-1825008-2](#) [1-1825013-1](#) [1-1825013-7](#) [1-1825013-9](#) [1-1825057-0](#) [1-1825058-3](#) [1-1825058-6](#) [1-1825058-9](#) [1-1825059-1](#) [1-1825059-2](#) [1-1825059-3](#) [1-1825059-4](#) [1-1825059-7](#) [1-1825059-8](#) [1-1825059-9](#) [1-1825190-0](#) [1-1825286-0](#) [1-382394-5](#) [1-382394-7](#) [1-435802-5](#) [1-435802-](#)