



P.C.B. LAYOUT

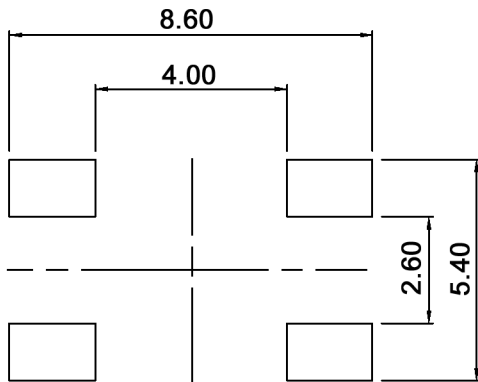

CIRCUIT DIAGRAM

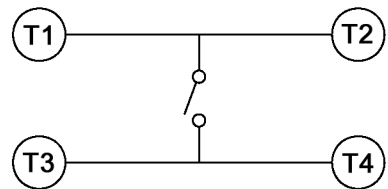

Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm		Date	Name
		04/06	dr
Contact rating	03/15	dr	
Revised	05/13	dr	
Revised	03/13	dr	
Specifications	01/09	dr	
Modifications	Date	Name	

**TSSE 65 x-J**

**knitter-switch**

**30 08 58**


Page

1/2

**Specifications:**

**Contact rating:** 50mA, 32V DC; max. 1VA  
**Contact resistance:** 100mOhm max.  
**Insulation resistance:** 100MOhm min. at 500V DC  
**Dielectric strength:** 250V, 50Hz for the duration of 1 minute  
**Operating temperature:** -40°C to +85°C  
**Electrical life:** min. 500 000 cycles  
**Operating force:** N: 180 +/-50gf, brown actuator  
                           R: 260 +/-70gf, red actuator  
                           T: 360 +/-90gf, transparent actuator  
  
**Mounting:** on pc-board - SMD  
**Travel:** 0.45 +/-0.2mm  
**Packaging unit:** 1 800 pcs. / reel  
**Sealing:** IP 67  
**Material:** Contacts: phosphor bronze, silver plated  
                   Terminals: brass, silver plated  
                   Cover: stainless steel  
                   Base: high-temp. thermoplastic nylon meets UI94V-0,  
                           washable  
                   Stem: silicone rubber

**Soldering conditions:**

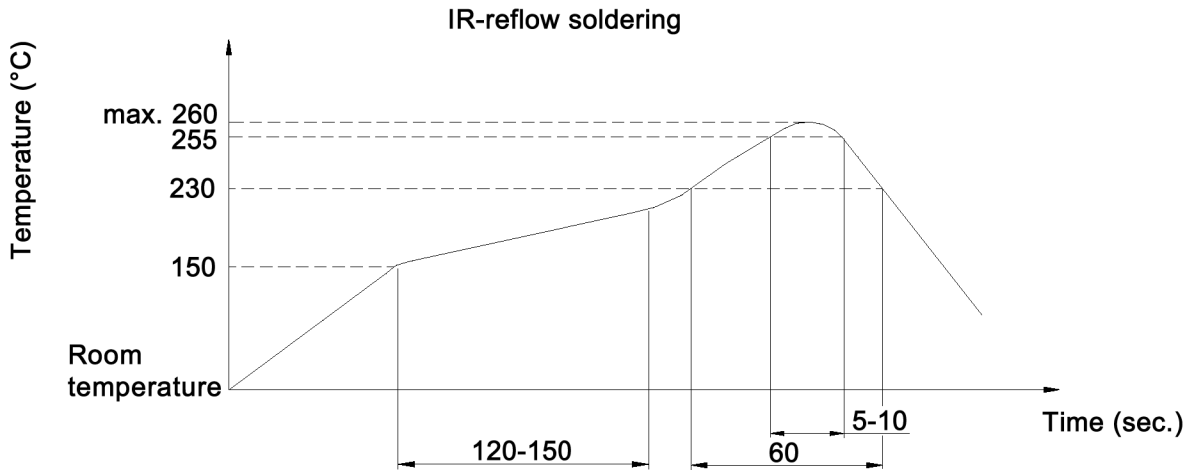

**Compliance: RohS II (2011/65/EU)**

Tolerances: max. ±0.20mm	Date	Name	<b>TSSE 65 x-J</b>	<b>30 08 58</b>	Page
	04/06	dr			
			<b>knitter-switch</b>		
					2/2
Modifications	Date	Name			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [knitter-switch](#) manufacturer:*

Other Similar products are found below :

[MTG106F](#) [YME IP 12L-U](#) [YME IP 01 B](#) [YME IP 16 N](#) [MTG 406 N](#) [MTG 406 P](#) [DBS2104](#) [MTA106E](#) [YME IP 12 D](#) [YME IP 01 A](#) [YME IP 12 H](#) [YME IP 12L](#) [YME IP 16 I](#) [LP 2 S NG](#) [MTE 306 E](#) [MTG206PA](#) [MTE 106 E](#) [MTG 106 H](#) [MTL 206 PA](#) [DPWL 1 CG D2D-RG](#) [MTE 206 S](#) [MTE 406 N](#) [ATE1E](#) [ATE 1 E RA](#) [DPWL 1 CG D1A-RG](#) [MTA 206 T](#) [MTA 406 S](#) [MTA206S](#) [DPWL 1 CG D1A-GR](#) [DPWL 1 CG D2D-GR](#) [LD 32 S](#) [FT 1 E](#) [DPW1AG-B](#) [DPW 1 AG-O](#) [MRS12V-19](#) [ATE 2 H](#) [DPW 1 BG D1P-R](#) [DPW 1 BG D2P-G](#) [DPW 1 BG D2P-R](#) [DPW 1 BG S-R](#) [MPLS12F-W](#) [ATE1G](#) [MSP103C](#) [MSS3122N-R](#) [MTE106H](#) [MTE 206 PA](#) [MTG206S](#) [LD 34 S](#) [LD 44 S](#) [LD60S](#)