

**CMS Series**  
**SMD Common Mode Line Filter**  
**Size 1206**



**CHARACTERISTICS**


- Common mode noise suppression for data lines
- Current compensation for signal intergration
- Quantity: 2000pcs

**APPLICATION**

- USB
- High-speed signals filter
- CAN

Dimensions: [mm]

Land Pattern: [mm]

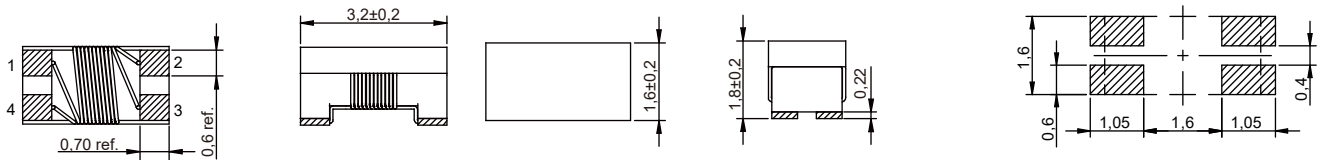


**Electrical Properties:**

Part No	Impedance @ 100 MHz (Ω)	Temperature Rise Current Max. (mA)	DCR Max. (Ω)	Rated Voltage (Volts)	Insulation Resistance (mΩ)
CMS1206-900R	90	370	0.3	50	20
CMS1206-161R	160	340	0.4	50	10
CMS1206-261R	260	310	0.5	50	10
CMS1206-601R	600	260	0.8	50	10
CMS1206-102R	1000	230	1.0	50	10
CMS1206-222R	2200	200	1.2	50	10

Operating Temperature: -40°C ~ +125°C

Temperature rise current the actual value of DC current when the temperature rise is ΔT40 °C

Typical Electrical Characteristics:

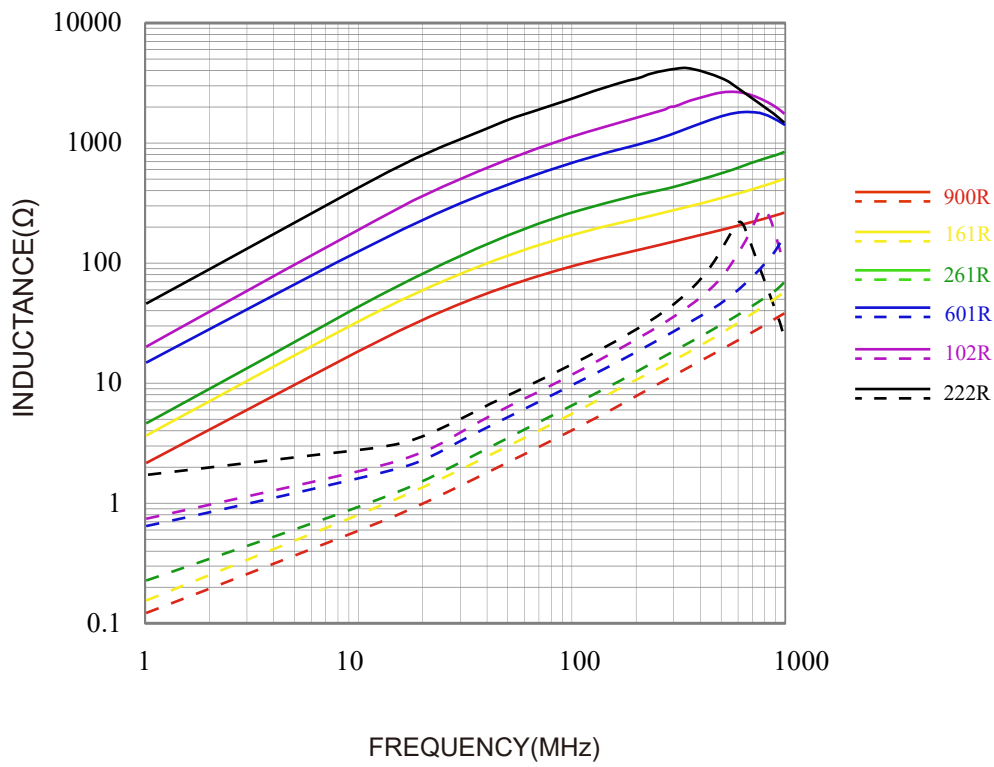

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)  
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [B2013FNLT](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#)  
[UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS072450](#) [UALSU9HF050500](#) [UALSU9H0208000](#)  
[UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#)  
[CMS3-11-R](#) [7351V](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [FE2X10-4-2NL](#) [744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#)  
[UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [7446630047](#) [744136](#) [744150](#) [RC212-0.25-47M](#)