

FBS Series
SMD EMI Suppression Ferrite Bead
Size 0603




FEATURES

- Noise countermeasures for general signals, high-speed signals and power line
- Impedance up to 1000Ω
- Up to 6A of rated current
- Operating temperature: -55 to +125 °C
- Quantity: 4000pcs


APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

Dimensions: [mm]

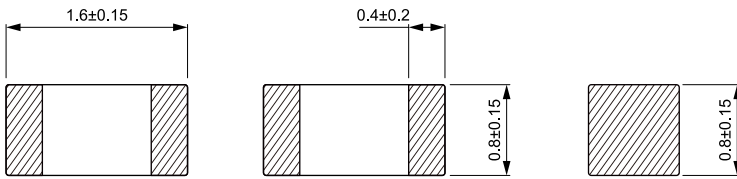

Land Pattern: [mm]

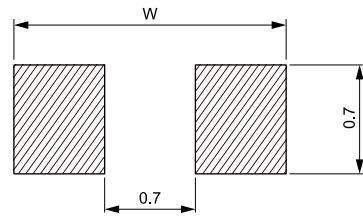

WIDE BAND / HIGH SPEED: W = 2.2
 HIGH CURRENT: W = 2.6


Electrical Properties:

Part No	Impedance @ 100MHz (Ω)	Tolerance	Temperature Rise Current (mA)	DC Resistance (Ω)
FBSHS0603-121-301R	120	±25%	300	0.300

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd
				SHEET: 1/2	
				APPROVAL:MAX	
A0	9-DEC-22	PDF	WL	SIZE: A4	DESCRIPTION: SMD EMI Suppression Ferrite Bead
REV	DATE	FILE	BY	PACKING UNIT: 4000 pcs	PART NO: FBSHS0603-121-301R

Typical Electrical Characteristics:



				UNIT: MM	KOHERelec KOHER (Shanghai) Electronic Co.,Ltd
				SHEET: 2/2	
				APPROVAL:MAX	
A0	9-DEC-22	PDF	WL	SIZE: A4	DESCRIPTION: SMD EMI Suppression Ferrite Bead
REV	DATE	FILE	BY	PACKING UNIT: 4000 pcs	PART NO: FB5HS0603-121-301R

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Beads](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CZB1EGTTP700P](#) [CZB1JGTTD152P](#) [CZB1JGTTD601P](#) [CZB2AFTTD800P](#) [CZB2AGTTD121P](#) [CZB2AGTTD601P](#) [CZB2BFTTE600P](#)
[PE-0402FB121ST](#) [NCB0603R301TR050F](#) [NCB0805A320TR050F](#) [NCB-H1206B680TR300F](#) [SMB2.5-1TR](#) [SMB2.5R-2](#) [CZB1EGTTP121P](#)
[CZB1JGTTD102P](#) [CZB1JGTTD121P](#) [CZB1JGTTD221P](#) [CZB1JGTTD600P](#) [CZB2AGTTD301P](#) [CZB2BFTTE301P](#) [CZB2BFTTE601P](#)
[4221R-1](#) [4221R-2](#) [4221R-3](#) [432703041971](#) [EMI0805R-2000](#) [EMI0805R-600](#) [SBY100505T-100Y-N](#) [NCB-GH0402D121TR060F](#) [NCB-](#)
[H1812D125TR150F](#) [CZB2AGTTD102P](#) [NCB0402P301TR005F](#) [NCB0603R152TR030F](#) [NCB0805A121TR050F](#) [NCB0805A301TR070F](#)
[NCB3312K900TR500F](#) [NCB-H0805A221TR300F](#) [NCB-H1806E181TR300F](#) [NCB0402P221TR030F](#) [NCB0402P300TR030F](#)
[NCB0402P601TR030F](#) [NCB0805A102TR040F](#) [NCB1806E151TR020F](#) [NCB-H0402P100TR200F](#) [NCB-H0603R121TR300F](#) [NCB-](#)
[H0805A220TR600F](#) [NCB-H1206B601TR200F](#) [CIM21J252NE](#) [EMI0805R-220](#) [74279250](#)