

**MDE Series**  
**Molding Power Inductors**  
**Size 0320**




**FEATURES**

- 100% Lead(Pb)-Free and RoHS compliant
- High current, low DCR, high efficiency
- 3.7×3.5×2.0mm maximum surface mount package
- Operating temperature -40 °C ~+125 °C (Including self-temperature rise)
- Quantity: 3000pcs


**APPLICATION**

- Note PC power system
- DC/DC converter

**Dimensions: [mm]**

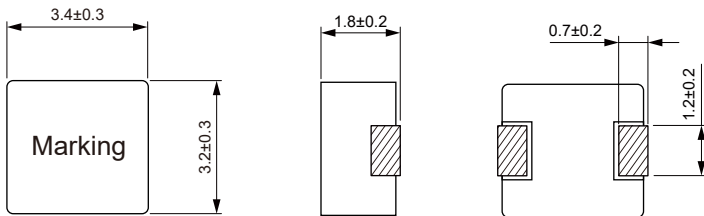

**Land Pattern: [mm]**



**Electrical Properties:**

Part No	Inductance @ 100kHz/1V (μH)	Tolerance	DC Resistance Max. (mΩ)	Saturation Current Typ. (A)	Temperature Rise Current Typ. (A)
MDE0320-R33M	0.33	±20%	21	10.0	8.0
MDE0320-R47M	0.47	±20%	23	9.0	7.0
MDE0320-R68M	0.68	±20%	29	7.0	5.5
MDE0320-1R0M	1.00	±20%	38	5.0	4.0
MDE0320-1R5M	1.50	±20%	50	4.0	3.8
MDE0320-2R2M	2.20	±20%	75	3.7	3.5
MDE0320-3R3M	3.30	±20%	145	3.5	3.0
MDE0320-4R7M	4.70	±20%	200	3.0	2.6
MDE0320-6R8M	6.80	±20%	300	2.2	1.9
MDE0320-100M	10.0	±20%	422	1.6	1.4

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is ΔT=40°C

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)  
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)  
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)  
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)  
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)  
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)