

**NRSE Series**  
**SMD Shielded Tiny Power Inductor**  
**Size 5020**




**CHARACTERISTICS**

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 3000pcs


**APPLICATION**

- DC/DC converter
- LC filter

Dimensions: [mm]

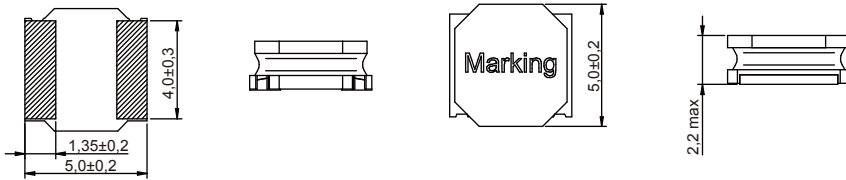

Land Pattern: [mm]



**Electrical Properties:**

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE5020-R22N	0.22	±30%	6	5	11
NRSE5020-R24N	0.24	±30%	6	5	11
NRSE5020-R33N	0.33	±30%	7.5	3.95	15
NRSE5020-R47N	0.47	±30%	4.85	3.95	15
NRSE5020-1R0N	1.0	±30%	4.33	3.7	20
NRSE5020-1R2N	1.2	±30%	4.2	3.5	25
NRSE5020-1R5N	1.5	±30%	4.1	3.2	26
NRSE5020-1R8N	1.8	±30%	4.00	3	30
NRSE5020-2R2N	2.2	±30%	3.85	2.9	38
NRSE5020-2R7N	2.7	±30%	3.5	2.4	45
NRSE5020-3R3N	3.3	±30%	3.25	2.4	46
NRSE5020-3R6N	3.6	±30%	2.9	2.3	48
NRSE5020-3R9N	3.9	±30%	2.9	2.15	50
NRSE5020-4R7M	4.7	±20%	2.4	2.05	65
NRSE5020-5R6M	5.6	±20%	2.3	1.85	72
NRSE5020-6R8M	6.8	±20%	2.1	1.7	92
NRSE5020-8R2M	8.2	±20%	1.9	1.6	100

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE5020-100M	10	±20%	1.8	1.5	125
NRSE5020-150M	15	±20%	1.44	1.25	180
NRSE5020-220M	22	±20%	1.18	1.05	250
NRSE5020-270M	27	±20%	1.1	1	300
NRSE5020-330M	33	±20%	0.97	0.83	370
NRSE5020-470M	47	±20%	0.81	0.7	560
NRSE5020-680M	68	±20%	0.70	0.53	850
NRSE5020-820M	82	±20%	0.65	0.5	950
NRSE5020-101M	100	±20%	0.57	0.43	1100
NRSE5020-151M	150	±20%	0.41	0.4	1500
NRSE5020-221M	220	±20%	0.35	0.3	2230


Operating temperature : -40 °C ~ +125 °C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 °C


Saturation Current that will cause initial inductance to drop approximately 30%

### Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

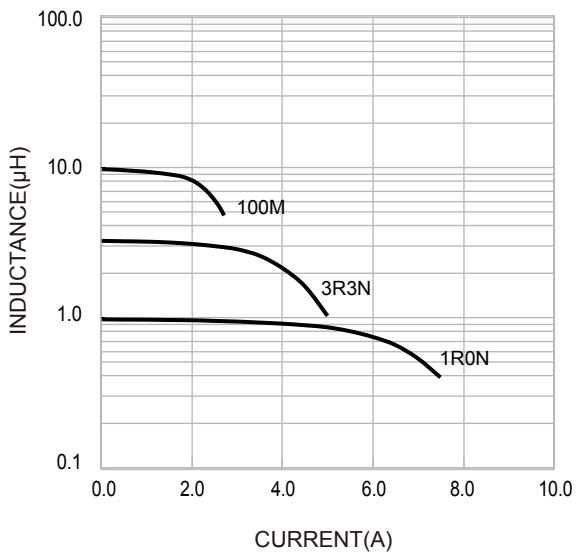

Temperature Rise VS. Current Characteristics:

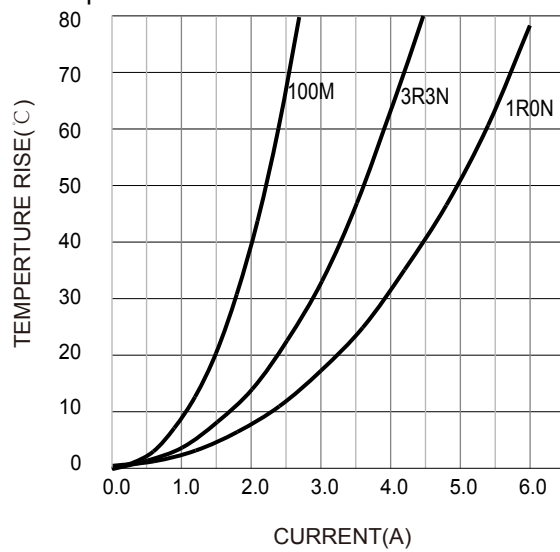

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)