


**SPM Series**  
**SMT Power Metal Inductor**  
**Size 3020**




**FEATURES**

- Large current, Low DC-resistance, High efficiency by magnetic metal powder
- Low acoustic noise and low leakage flux noise by shielded construction
- AEC-Q200 Compliant
- Operating temperature: -40 °C ~125 °C
- Quantity: 1000 pcs/reel

**Dimensions: [mm]**

**Land Pattern: [mm]**

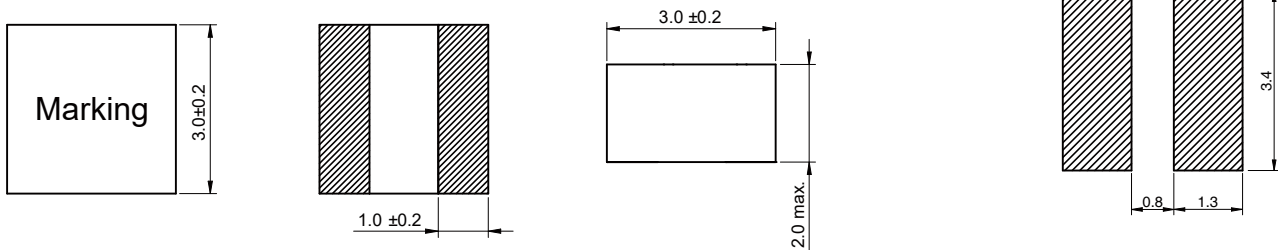

**Electrical Properties:**












Part No	Inductance (μH)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DCR Max. (mΩ)	DCR Typ. (mΩ)
SPM3020-R33N	0.33	± 30%	5.5	6.8	17	14
SPM3020-R47N	0.47	± 30%	4.8	6.2	22	18
SPM3020-R68N	0.68	± 30%	4.5	5.2	27	22
SPM3020-1R0M	1.0	± 20%	4.0	4.2	32	26
SPM3020-1R2M	1.2	± 20%	3.9	4.0	36	30
SPM3020-1R5M	1.5	± 20%	3.7	3.9	39	33
SPM3020-2R2M	2.2	± 20%	2.4	3.6	80	67
SPM3020-3R3M	3.3	± 20%	2.2	3.4	114	99
SPM3020-4R7M	4.7	± 20%	1.9	3.0	158	137
SPM3020-6R8M	6.8	± 20%	1.6	2.3	193	168
SPM3020-100M	10	± 20%	1.2	2.0	322	280

Inductance is measured at 100kHz,1V

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 °C

Saturation Current that will cause initial inductance to drop approximately 20%

Typical Electrical Characteristics:

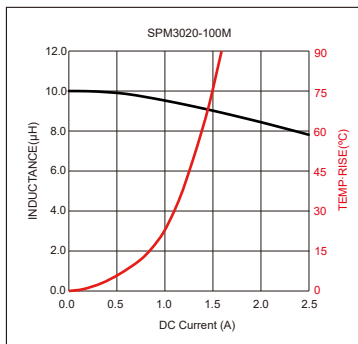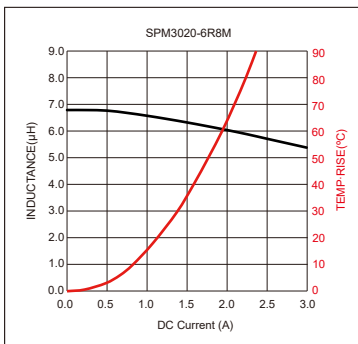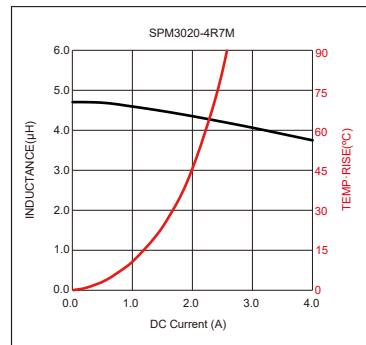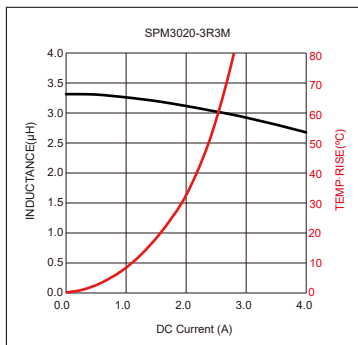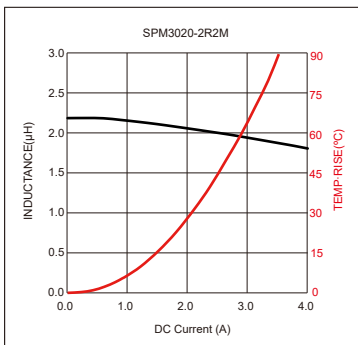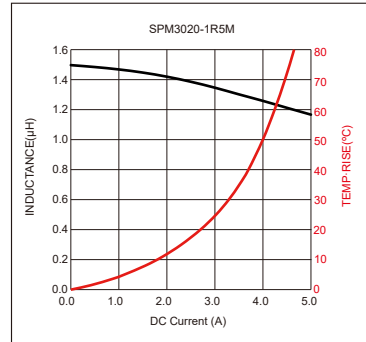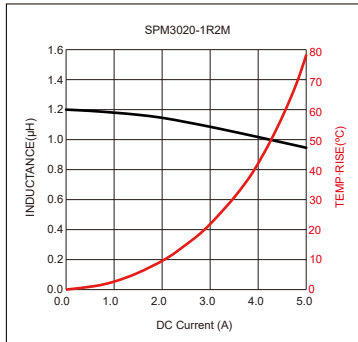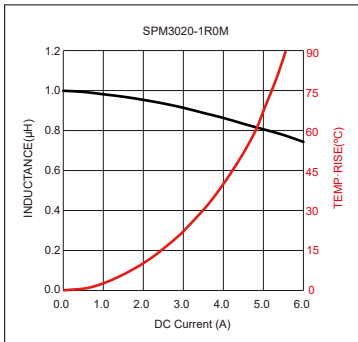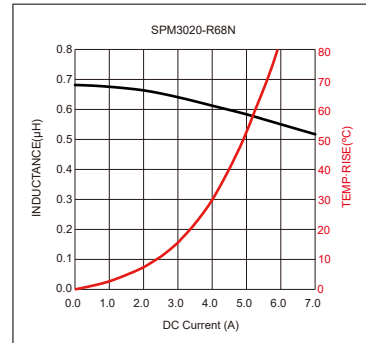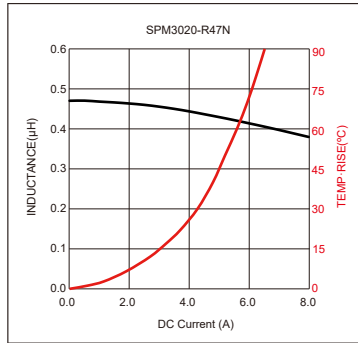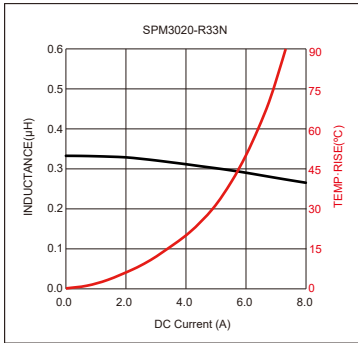

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)  
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-](#)  
[53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-](#)  
[471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-](#)  
[4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)  
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)