



Dimensions: [mm]

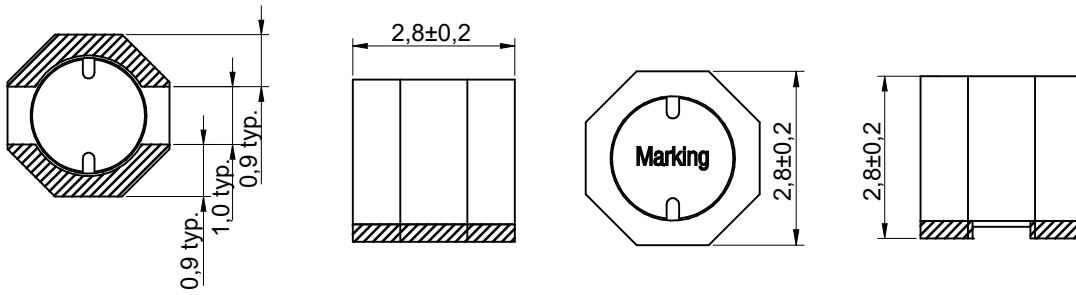

Recommended Land Pattern: [mm]

Schematic:




Electrical Properties:

Properties	L (μ H)	I_R (A)	I_{sat} (A)	R_{DC} (m Ω)	R_{DC} (m Ω)	F_{res} (MHz)
Value	33	0.4	0.62	840	960	12
Tolerance	$\pm 20\%$	typ.	typ.	typ.	max.	typ.
Test Condition	100KHz/0.25V	$\Delta T=40K$	$ \Delta L/L < 35\%$	@15~35°C	@15~35°C	-


General Information:


It is recommended that the temperature of the component does not exceed +125°C
 Test conditions of Electrical Properties: 15~35°C, 20%~80%RH
 Operating Temperature: -55°C to +125°C

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 1/2	
				APPROVAL: HD	
				SIZE:	DESCRIPTION: SMD Shielded Tiny Power Inductor
A	08-MAY-18	PDF	CY	PACKING UNIT:	PART NO: TSDR2828-330M
REV	DATE	FILE	BY		

Typical Electrical Characteristics:

Inductance VS. DC Current Characteristics:

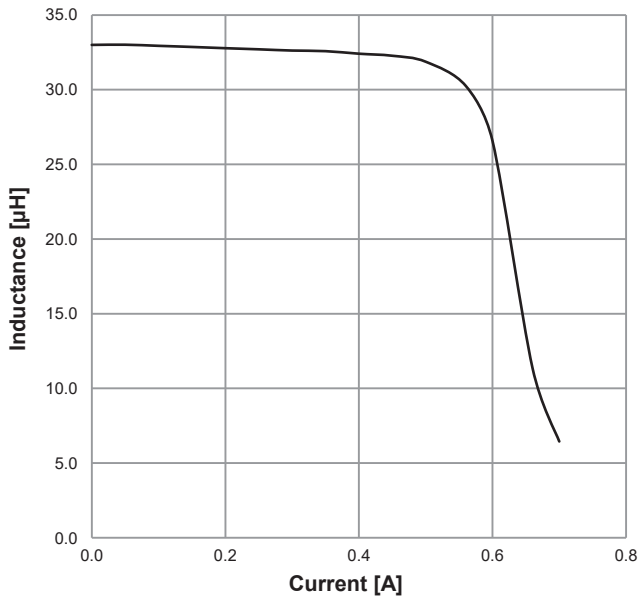

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 2/2	
				APPROVAL: HD	
				SIZE:	DESCRIPTION: SMD Shielded Tiny Power Inductor
A	08-MAY-18	PDF	CY	PACKING UNIT:	PART NO: TSDR2828-330M
REV	DATE	FILE	BY		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)