

TSDR Series
SMD Shielded Tiny Power Inductor
Size 3816



CHARACTERISTICS


- Low profile type
- Magnetically shielded
- Different sizes available
- Quantity: 1000pcs

APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

Land Pattern: [mm]

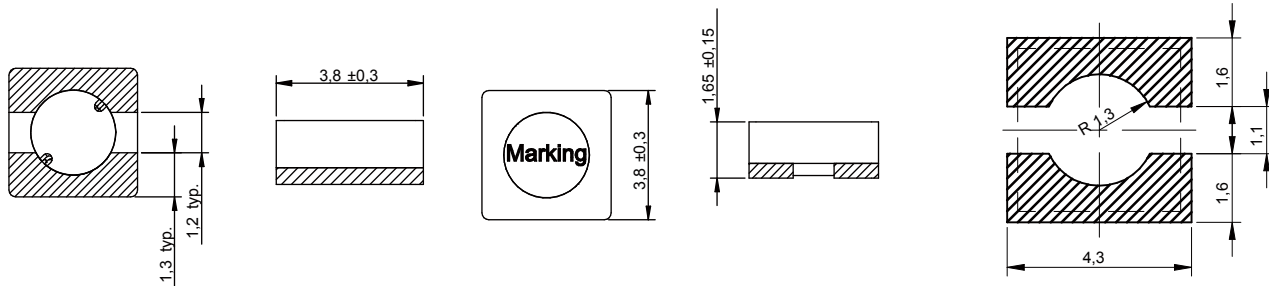

Electrical Properties:













Part No	Inductance (μH)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DCR Typ. (mΩ)	DCR Max. (mΩ)	Core Material
TSDR3816-R47N	0.47	±30%	3.0	2.0	16	22	NiZn
TSDR3816-1R0N	1.0	±30%	2.0	1.6	26	37	
TSDR3816-1R5N	1.5	±30%	1.75	1.55	40	47	
TSDR3816-2R5N	2.5	±30%	1.45	1.25	50	58	
TSDR3816-3R6N	3.6	±30%	1.38	1.1	66	85	
TSDR3816-4R7N	4.7	±30%	1.2	0.9	90	105	
TSDR3816-6R8N	6.8	±30%	0.85	0.75	135	156	
TSDR3816-100N	10	±30%	0.74	0.56	185	205	
TSDR3816-150N	15	±30%	0.62	0.45	255	285	
TSDR3816-220N	22	±30%	0.51	0.36	410	450	
TSDR3816-330N	33	±30%	0.42	0.32	635	660	
TSDR3816-470N	47	±30%	0.39	0.25	940	1000	
TSDR3816-680N	68	±30%	0.32	0.22	1150	1450	
TSDR3816-101N	100	±30%	0.25	0.18	1930	2400	



Operating Temperature: -40 °C up to +125 °C

Temperature rise current: The actual value of DC current when the temperature rise is ΔT30 °C

Saturation Current that will cause initial inductance to drop approximately 35%

Typical Electrical Characteristics:

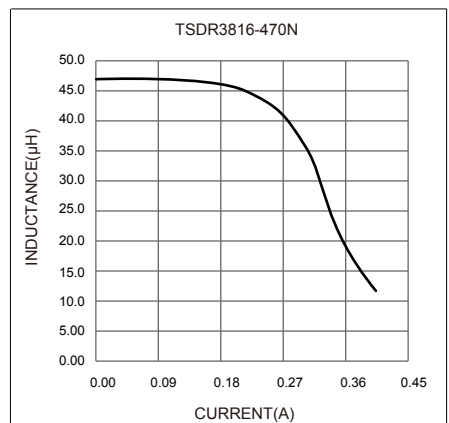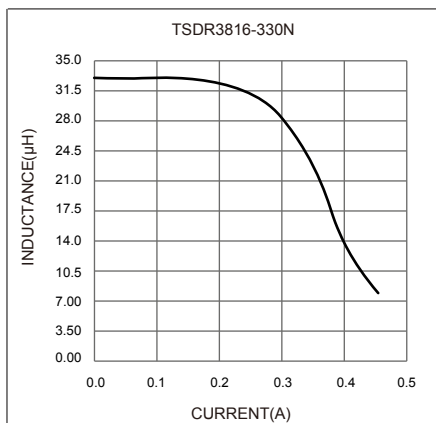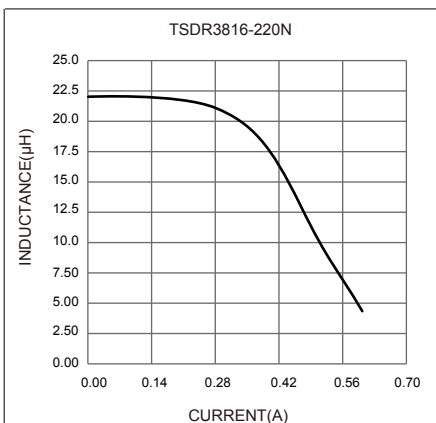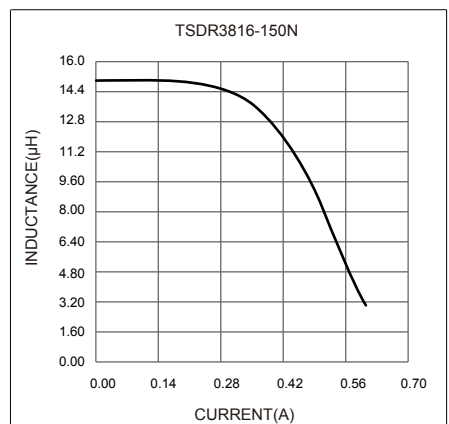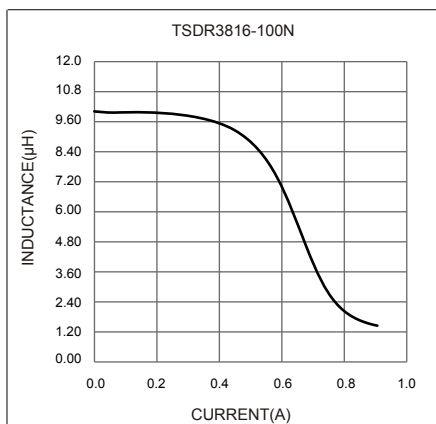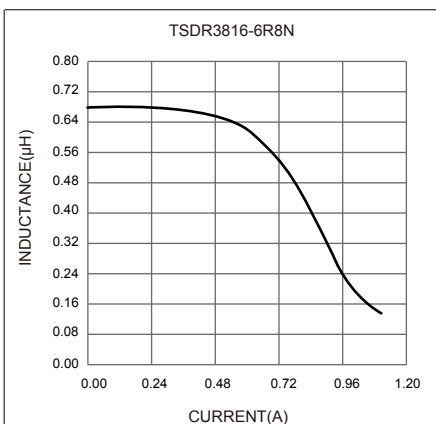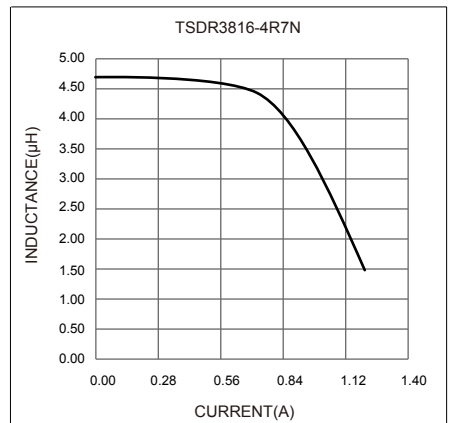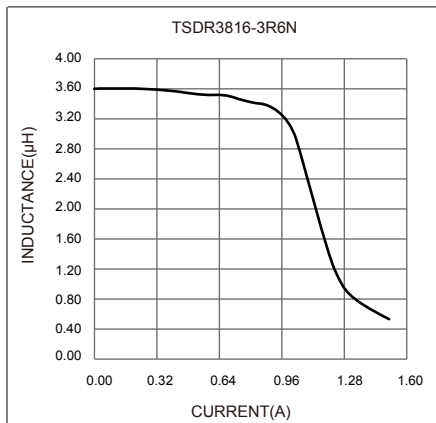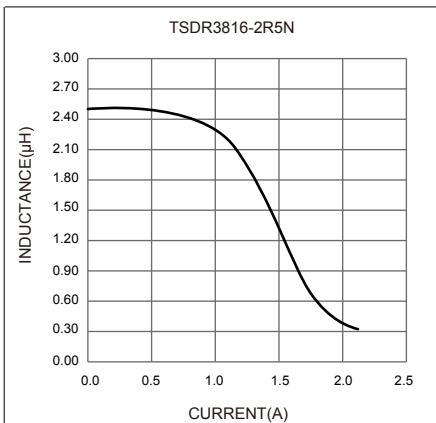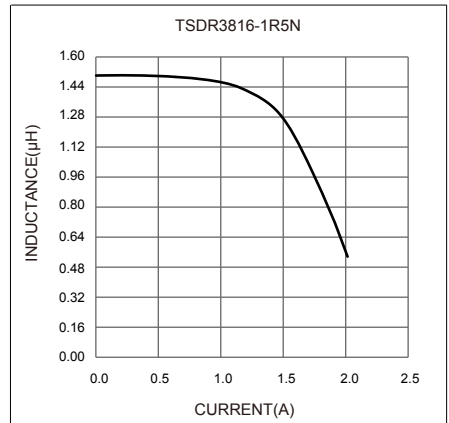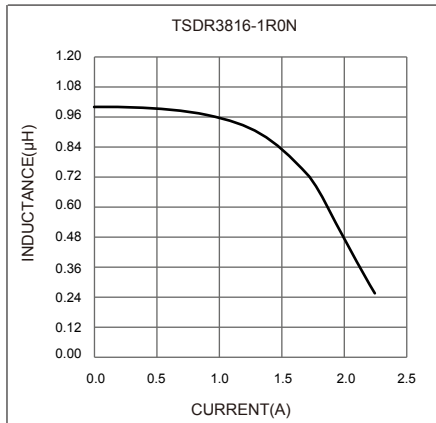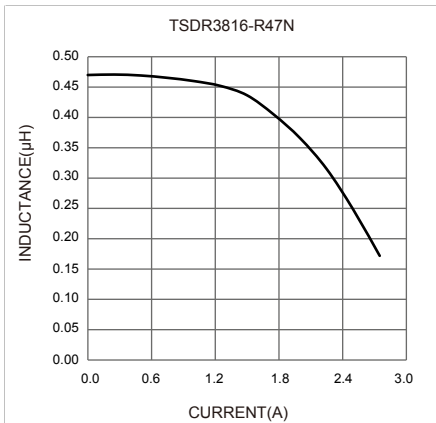

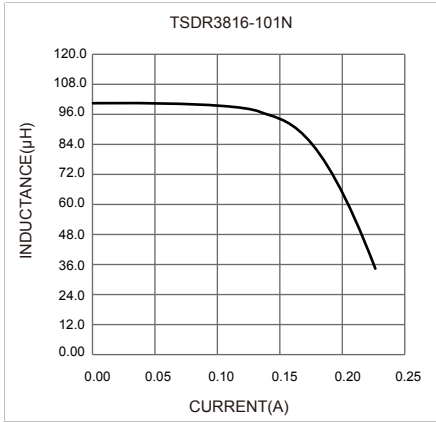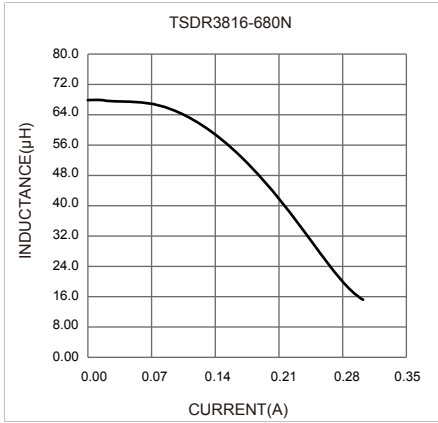

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)