


# NON-INSULATED PARALLEL & BUTT CONNECTORS

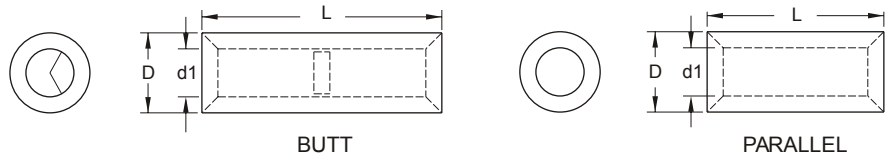

**MAXIMUM ELECTRIC CURRENT:**

A.W.G.	26	24	22	20	18	16	14	12	10	8
AMP.	5.5	7	9	12	17	18	30	35	50	70

**TERMINAL MATERIAL: COPPER TUBULAR**

WIRE RANGE A.W.G. mm <sup>2</sup>	ITEM NO.			DIMENSION <sup>inch</sup> / <sub>mm</sub>				CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
26-22 A.W.G. 0.2-0.5 mm <sup>2</sup>	PNT0.5	.197 5.0	BNT0.5	.472 12.0	.083 2.1	.051 1.3	.016 0.4	K.S. MODEL <b>KSTHT-203</b> WITH DIE INDEX NO:(INSUL)16-22	1000
22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>	PNT1	.315 8.0	BNT1	.591 15.0	.130 3.3	.067 1.7	.031 0.8	IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:1.25 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:22-18	1000
			BNT1-16	.630 16.0					1000
16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>	PNT2	.315 8.0	BNT2	.591 15.0	.154 3.9	.091 2.3	.031 0.8	IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:2 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:16-14	1000
	PNT2-7	.276 7.0							
	PNT2-15	.591 15.0	BNT2-16	.630 16.0					
14-12 A.W.G. 2.5-4 mm <sup>2</sup>	PNT3	.335 8.5	BNT3	.591 15.0	.197 5.0	.118 3.0	.039 1.0	IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:12-10	1000
12-10 A.W.G. 4-6 mm <sup>2</sup>	PNT5	.335 8.5	BNT5	.591 15.0	.213 5.4	.134 3.4	.039 1.0	IZUMI MODEL <b>5N18</b> WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:12-10	1000
			BNT5-20	.787 20.0					
	PNT5-15	.335 15.0	BNT5-21	.827 21.0					
			BNT5-30	1.181 30.0					
8 A.W.G. 8 mm <sup>2</sup>	PNT8	.374 9.5	BNT8	.827 21.0	.276 7.0	.181 4.6	.047 1.2	IZUMI MODEL <b>5N18</b> <b>12#A</b> WITH DIE INDEX NO:1.8 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:8	1000/500
			BNT8-42	1.654 42.0					250

ALL LISTED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [K.S Terminals](#) manufacturer:*

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70228-3](#) [00-054007-70256-6](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2900-1-04412](#) [0190160084](#) [0190350008](#) [600TS-10](#) [605601-1](#) [60617-1-C](#) [61314-6-C](#) [626-0194](#) [63-S](#) [M55155/079C01](#) [M55155/099B03](#) [M55155/109H01](#) [M55155/12XH05](#) [M55155/29XJ08](#) [M55155/30-6S](#) [M55155/30-9S](#) [M55155/30XI09](#) [M6-14RSX](#) [M86700006](#) [D18-110B-C](#) [D18-110B-M](#) [701-1936](#) [701-1955](#) [701-2003](#) [701-2007](#) [701-2013](#) [701-2018](#) [701-2069](#) [701-2077-60](#) [701-2315](#) [701-2430](#) [701-2480](#)