



SECTION A-A



DETAIL A
SCALE 10:1

**UNCONTROLLED
DOCUMENT**

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	55 Ω	140 Ω	300 Ω
Minimum	- Ω	112 Ω	- Ω

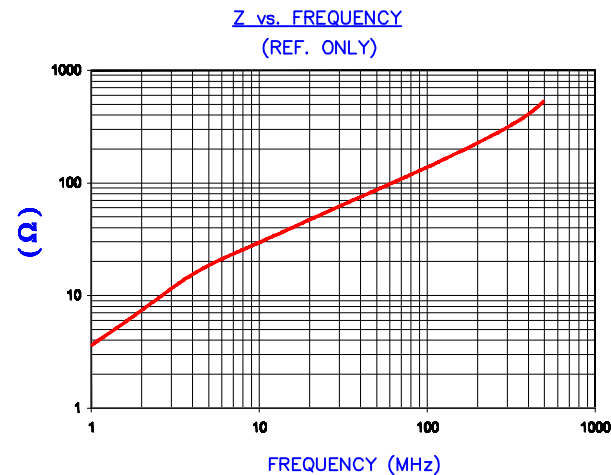

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture, REF # 2971

FERRITE CORE DIMENSIONS (SPEC):mm[Inches]

A	27.97 [1.101]	+	0.64 [0.025]
B	22.94 [0.903]	+	0.50 [0.020]
C	14.66 [0.577]	+	0.38 [0.015]
D	7.75 [0.305]	+	0.38 [0.015]
E	1.50 [0.059]	+	0.25 [0.010]
F	2.36 [0.093]	+	-
G	11.71 [0.461]	+	-

WEIGHT/1000 12.10 kgs [26.67 Lbs]

DIMENSIONS ARE IN mm[INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
L	CORRECT LOCATION OF G DIMENSION	08/15/07	JRK				
K	UPDATE Z SPEC AND COMPANY LOGO	07/27/07	JRK				
J	CORRECT THE LOCATION OF F DIMENSION	10/27/06	JRK				
H	UPDATE MIN Z SPECS @100Mhz ADD REF #	01/26/04	JRK				
G	UPDATE FORMAT AND Z SPECS REM NOTE 1	01/31/03	JRK				
F	UPDATE TO NEW CNZ FORMAT ADD Z CURVE	09/11/02	JRK				
E	UPDATE Z SPECS REM MAX	11/12/01	JRK				
D	UPDATE PRINT FOR ELECTRONIC DATABASE UPDATED "Z" SPECS.	11/30/00	JAJ				
C	UPDATED Z SPECS	03/18/96	BAC				
REV	DESCRIPTION	DATE	INT				

PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
28R1101-000	L	CNZ RIBBON CORE	LNK
DATE:	SCALE:	MATERIAL:	
07/12/90	2 : 1	NiZn FERRITE	
CAD #	TOOL #		
28R1101-000-L	R1101		

SCALE DRAWING 1:1



28R1101-000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Cable Cores](#) category:

Click to view products by [Laird](#) manufacturer:

Other Similar products are found below :

[FB73-422](#) [FX28R0984-2](#) [AB 3X2X3SM](#) [2643665709](#) [28R1127](#) [28R1260](#) [28R1575](#) [2631006302](#) [28R0760](#) [432703057171](#) [432202134321](#)
[4327 030 11761](#) [SS7X4X3W](#) [4327 030 16141](#) [ASSE017-2](#) [2943666671](#) [4327 030 12611](#) [SM28R1575](#) [HFB123049-300](#) [HFB143064-100](#)
[HFB143064-300](#) [HFB170070-000](#) [ETD29/16/10-3C94](#) [ETD29-3F3](#) [ETD39-3C94](#) [RFP1-40-28-M-A5](#) [RFP2-10-10-A5](#) [RFP2-25-12-A5](#)
[RFS1-14-15-A5](#) [RFS1-15-12-A5](#) [RFS1-15-7-2-A5](#) [RFS1-6-8-A5](#) [RFS2-16-12-A5](#) [RFS2-27-12-A5](#) [RFS2-40-12-A5](#) [RFS2-9-12-2-A5](#) [RFS3-](#)
[6-7-A5](#) [RKCF-05-A5](#) [RKCF-08-A5](#) [RKCF-13-A5](#) [74270036](#) [7427212](#) [B-20L-95B](#) [B66317G0000X127](#) [U100/57/25-3C90](#) [LFB127079-000](#)
[LFB143064-000](#) [LFB159079-000](#) [LFB250150-000](#) [RRC-12-7-15-M](#)