


UNCONTROLLED DOCUMENT

CORE DIMENSIONS:

A	14.99 [.590]	±	0.30 [.012]
B	6.60 [.260]	±	0.20 [.008]
C	29.16 [1.148]	±	0.64 [.025]
D	7.44 [.293]	±	0.15 [.006]

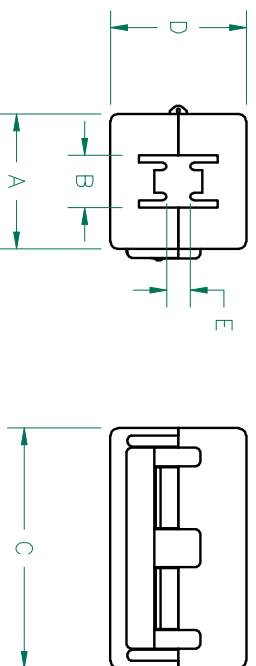


CASE DIMENSIONS:

A	18.15 [.715]	±	0.25 [.010]
B	7.05 [.278]	±	0.25 [.010]
C	32.50 [1.280]	±	0.25 [.010]
D	18.90 [.744]	±	0.60 [.024]
E	3.40 [.134]		Ref.

NET IMPEDANCE (Z)				
Frequency	300 MHz	500 MHz	1 GHz	
Nominal (REF)	274 Ω	350 Ω	256 Ω	
Minimum	- Ω	280 Ω	- Ω	

NET Z,R AND X vs. FREQUENCY

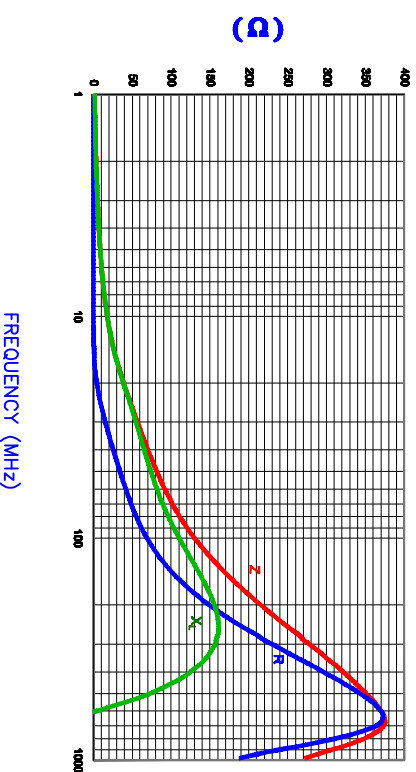

AGILENT E4981A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF#3989

NOTES:

1. ASSEMBLED PART #: HFA150066-0A2
2. CASE COLOR: BLACK - "0A2"

DIMENSIONS ARE IN mm[INCHES].

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

REV	DESCRIPTION	DATE	INT	PROJECT/PART NUMBER	REV	PART TYPE	DRAWN BY:
A	ORIGINAL DRAFT	08/23/04	JRK	HFA150066-0A2	C	FERRITE	JRK
B	REMOVE NOTES 1, 3, & 4 CHANGE CORE "C" & "D" DIM TOLERANCES TO ±0.64 [.025] & ±0.15 [.006] REVISE CASE DIMS A, B, & D ADD DIM E TO CASE	04/01/06	TMB	DATE: 08/23/04		FERRITE SNAP-ON	
C	REMOVE CORE & CASE P/N REFERENCE	05/17/06	TMB	SCALE: NTS			
				CAD # HFA150066-0A2-C	TOOL #		MATERIAL: NiZn Ferrite

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Clamp On Cores](#) category:

Click to view products by [Laird](#) manufacturer:

Other Similar products are found below :

[CS28B0984](#) [CS28B1501](#) [CV28B1642](#) [RA33B4340](#) [IL25B0642K](#) [SA28B0121](#) [SS33B2033](#) [HI28B2039](#) [RA33B2480](#) [TC28B0805](#)
[432703037561](#) [CF28B0642](#) [SS33B2035](#) [TC28B2000](#) [CF28B1937](#) [SS20B2037](#) [SS33B2032](#) [TC20B1500](#) [SS25B2032](#) [SS20B2034](#)
[PM28B0686](#) [CW28B0642](#) [CV28B1984](#) [RA20B1729](#) [CS33B4000](#) [TC33B0805](#) [SS33B2040](#) [TC28B1501](#) [AS33B2036](#) [AS25B2032](#)
[TC28B0550](#) [CS25B2000](#) [AS25B2036](#) [AS28B2027](#) [CS33B2000](#) [74271111](#) [74271132](#) [74271132S](#) [74271142](#) [74271222](#) [7427151](#) [74271622S](#)
[RRH-100-50-100](#) [RRH-105-55-200](#) [RRH-115-43-260](#) [RRH-142-70-285](#) [RRH-175-107-285](#) [RRH-186-102-250](#) [RRH-186-102-286](#) [RRH-259-128-286](#)