


Steward

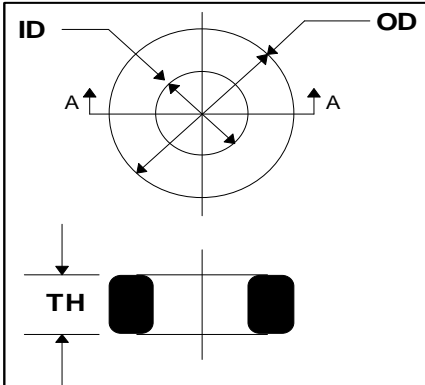

CORE DIMENSIONS

| UNCOATED CORE | | 35T0231-000 | | | |
|-------------------------|------|-------------|---|-----|--------|
| | MM | INCHES | | MM | INCHES |
| OD | 5.84 | (.230) | ± | .15 | (.006) |
| ID | 3.05 | (.120) | ± | .13 | (.005) |
| TH | 1.52 | (.060) | ± | .13 | (.005) |
| SINGLE PARYLENE COATING | | 35T0231-00P | | | |
| OD | 5.87 | (.231) | ± | .15 | (.006) |
| ID | 3.02 | (.119) | ± | .13 | (.005) |
| TH | 1.55 | (.061) | ± | .13 | (.005) |

WEIGHT / K 0.32 LBS
 INITIAL PERMEABILITY 5000

ELECTRICAL SPECIFICATION

| | MIN (μ H) | MIN TOL. | NOM (μ H) | MAX (μ H) | MAX TOL. | FREQ. (kHz) | VOLT. (V) | TURNS |
|---|-------------------|----------|-------------------|-------------------|----------|----------------|--------------|-------|
| L | .793 | (-20%) | .991 | 1.190 | (+20%) | 100 | ≤ .00046 | 1 |
| Q | 10 | - | - | - | - | 100 | ≤ .00046 | 1 |

COATING SPECIFICATIONS

| TYPE | Max. Coating (mils.) | Min. DLB VAC | TEST FORCE (LB) |
|----------|-------------------------|-----------------|-----------------|
| PARYLENE | 0.5 | 1000 | 0.30 |

NOTES:



| Rev | Description | Date | INT |
|-----|---|------------|-----|
| A | Original Draft | 7/11/1995 | JBE |
| B | REVISE PRINT | 7/11/1995 | JBE |
| C | UPDATE PRINT FORMAT | 7/11/1995 | JBE |
| D | TRANSFER TO LOTUS NOTES | 11/19/1997 | IS |
| E | RE-ACTIVATE PRINT REMOVE Q SPECS CHANGE PART NUMBER | 10/5/2005 | JRK |
| F | Revised Template | 6/1/2006 | WMM |

| | | |
|----------------|---------------------|------|
| Date: 6/1/2006 | DWG # 35T0231-00P-F | Rev: |
| Drawn By: WMM | Title # 35T0231-00P | F |

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [laird connectivity](#) manufacturer:

Other Similar products are found below :

[29D3800-000](#) [63202-501](#) [8860-0062-324-72](#) [A10237-21](#) [A14564-01](#) [A15344-01](#) [DA-033-12-02-00-00](#) [DVK-PRM120](#) [ODH24-9-WB](#)
[9360002-301](#) [A10093-37](#) [A10874-01](#) [A11809-02](#) [A15796-26](#) [A16367-04](#) [CMQ69273-30NF](#) [430701-501](#) [430744-513](#) [430848-509](#) [4106-.25](#)
[430140-502](#) [430745-505](#) [DVK-RM191-SM-01](#) [0650-00005](#) [56460-501](#) [POE-24IR](#) [DVK-BL600-SC](#) [TPCM FSF-52](#) [CRX150](#) [CRX150B](#)
[DVK-BT900-SA-03](#) [B3003](#) [PA24-19](#) [POE-HP-24i](#) [PLC1666](#) [A17690-10](#) [Y4065](#) [387000840](#) [A17653-12](#) [YS1505](#) [387000866](#) [OD9-8](#)
[A17775-05](#) [CW42S](#) [A17690-09](#) [Y4066](#) [HDDA3W-29-DP](#) [R2T9-12](#) [PT400100NSMA](#) [DVK-MSD50NBT](#)