




## **External Two-Way Radio Antenna**



## **FEATURES**


- Covers 2.4 to 2.5 GHz for 802.11b, and 4.9 to 6 GHz for 802.11a and all US, European, and Japanese WLAN applications
- Omni-directional patterns at all frequencies with increased gain in upper bands for optimal coverage

| PARAMETER         | SPECIFICATION  |  |
|-------------------|--|--|
| Frequency         | 2.4 - 2.5 GHz<br>4.9 - 5.875 GHz   |  |
| Gain              | 2.1 dBi (2.45 GHz)<br>2.4 dBi (4.9 GHz)<br>2.6 dBi (5.25 GHz)<br>3.4 dBi (5.875 GHz) |  |
| Polarization      | Vertical, Omni-directional   |  |
| Nominal Impedance | 50 ohms  |  |
| VSWR              | 2:1 max across all bands   |  |
| Size              | 95.9 mm (180° straight)<br>or 75.4 mm (90° bent) x 9.3 mm dia.                       |  |



## **FREQUENCIES AND CONNECTORS**

| MODEL#          | PART #   | COLOR | CONNECTOR |
|-----------------|----------|-------|-----------|
| WTSB2450- RPSMA | MAF94051 | Black | RP-SMA    |
| WTS2450- RPSMA  | MAF94110 | White | RP-SMA    |
| WTSB2450- SMA   | MAF94271 | Black | SMA       |

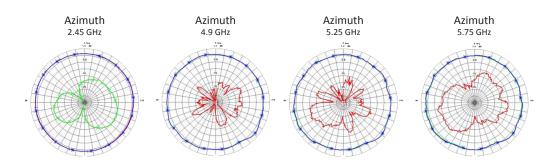

Americas: +1.847.839.6907

IAS-Americas East Sales@lair dtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-WTS 2450 080114

Any information furnished by Laird, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any partial district or any specific or general uses. Laird shall not be liable for indental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Ferms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2014 Laird, Inc. All Rights Reserved. Laird the Laird Logo, and other marks are trade marks or registered trade marks of Laird, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352