

Circularly Polarized RFID Panel Antenna

PER86506



865 TO 868 MHz RFID PANEL ANTENNA

The Laird Technologies' PER86506 antenna is a circularly polarized panel antenna that provides reception and transmission of signals in the 865 - 868 MHz. Laird Technologies' industry renowned design methodology achieves maximum efficiency and performance across the entire frequency band. Both VSWR and axial ratios are both excellent and allow the user to achieve the maximum performance for an antenna of this type. This embedded antenna comes with a wide range of connector and cable options.

FEATURES

- Extremely low VSWR and axial ratio
- US band and Europe band available
- Wide range of connector and cable options

MARKETS


- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

SPECIFICATIONS

PARAMETER	
Frequency	865 to 868 MHz
Gain	6 dBic
VSWR	1.3:1
Polarization	RH CP
Beamwidth 3dB, Horizontal	80° typical
Beamwidth 3dB, Elevation	80° typical
Axial Ratio dB	1.2 typical
Mounting Style	Standoff
Dimensions (mm)	125 x 125 x 7
Connector	Pigtail with Multiple Choices

Circularly Polarized RFID Panel Antenna PER86506

PATTERNS

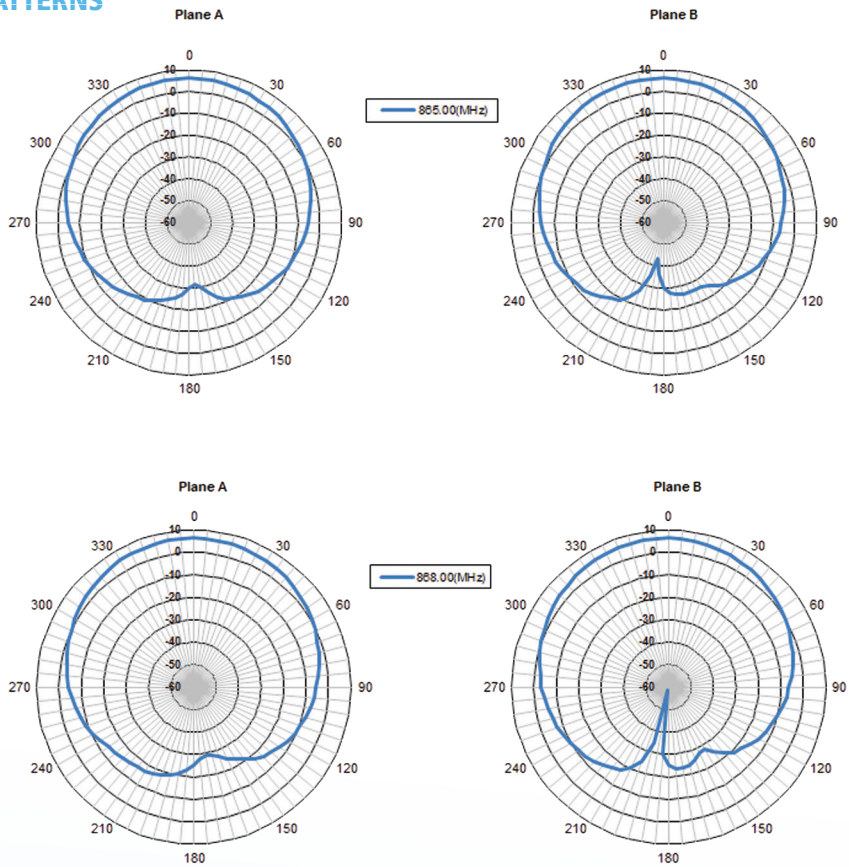

ORDERING GUIDE

Part Number	Specifications
PER86506-61SMA	865-868 MHz panel, RHCP, 6 dBic, 61 cm, SMA
PER86506-61RTN	865-868 MHz panel, RHCP, 6 dBic, 61 cm, RTN

ANT-DS-PER86506 0413

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Laird Connectivity](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)